

H4D42HD8 8MP HQA Dome Camera MFZ

HBD42HD8 8MP HQA Bullet Camera MFZ

Configuration Guide


Follow the instructions in this guide to configure your camera.

Configuring Your Camera's Settings

When the camera is connected to a Performance Series HRHT DVR, you can configure the camera's settings using the camera's on-screen display (OSD) menu.

To configure the camera's settings:

1. Connect the camera to a Honeywell Performance Series HRHT DVR and log on as the admin user.
2. Right-click to display the shortcut menu, then click **Camera Menu**. The **Menu Operation** window opens.

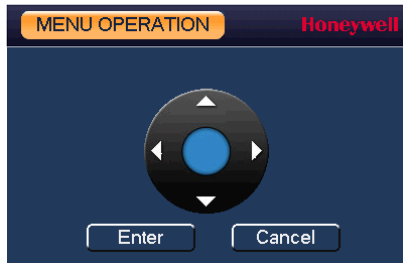

3. Click **Enter** to display the camera's OSD menu.
4. To configure the camera, in the **Menu Operation** window, click the up/down arrows to move through the menu list, click the left/right arrows to change a menu setting, or click **Enter** to enter a submenu (←) or execute a command.
5. After you have finished configuring the camera, scroll down to **Exit**, and then click **Enter** to exit the OSD menu. Right-click to close the **Menu Operation** window.

OSD Menu Tree

1st Level	2nd Level		3rd Level		4th Level	
Format	PAL/NTSC←	Confirm/Cancel				
Video Mode	4K←HQA 4M←HQA	Confirm/Cancel				
Backlight Mode	Off					
	BLC←	On/Off Return				
	WDR←	1-5 Return				
	HLC←	1-5 Return				
Image Adjust	←	Image Mode	Standard/ Soft/ Flamboyant			
		Sharpness	0-15			
		Brightness	0-15			
		Contrast	0-15			
		Saturation	0-15			
		Chroma	0-15			
		Sharp Suppress	0-15			
		Chroma Suppress	0-15			
		Gamma	0-15			
		2DNR	0-15			
		3DNR	0-15			
		Return				
	Exposure	←	Exposure Mode	Auto←	Gain Max Limit 0-15 Gain Min Limit 0-15 Return	
		Low Noise←	Gain Max Limit 0-15 Return			
		Anti-smear←	Shutter Max	PAL: 0ms-40ms; NTSC: 0ms-33ms Return		
		Manual←	Shutter	1/4(3); 1/6(5); 1/10(8); 1/15(12); 1/30(25); 1/60(50); 1/120(100); 1/250; 1/500; 1/1000; 1/2000; 1/4000; 1/10000; 1/100000		

1st Level	2nd Level		3rd Level		4th Level		
Exposure (CONT'D)	← (CONT'D)	Exposure Mode (CONT'D)	Manual ← (CONT'D)	Shutter (CONT'D)	Custom Range ←	Shutter Max	PAL: 0ms-40ms; NTSC: 0ms-33ms
				Shutter Min		PAL: 0ms-40ms; NTSC: 0ms-33ms	
				Return			
				Gain Max Limit		0-15	
				Gain Min Limit		0-15	
				Return			
				Exposure Level		0-15	
White Balance	Auto	Auto Tracking	Manual ←	Blue Gain	1-100		
				Red Gain	1-100		
				Return			
				Sodium Lamp			
Day/Night	Auto ←	Day/Night	Night/Day	1-19			
				2-20			
				Waiting Time	1-15		
				Return			
Language	English/ Spanish/ Portuguese/ France/ Deutsch/ Russian/ Polish/ Korean/ Chinese/ Japanese	Black/White	Color				
Advanced	←	Camera name	Off	ON ←			
				Name ←			
				Location ←			
				Return			
				Mirror	←	H-Mirror	Off/On
		V-Mirror	Off/On				
		Return					

1st Level	2nd Level		3rd Level		4th Level		
Advance (CONT'D)	← (CONT'D)	Audio Mode	Off				
			External Audio				
		Smart IR	Auto ←	Level	0-15		
				Return			
		Voltage Prompt	On ←	Alarm Upload	Off/On		
				Return			
		Privacy Mask	On ←	Area Select	0-7		
				Display	Off/On		
				Area Setting	Size ←		
				Location ←			
				Default			
				Return			
				Off			
		D-Zoom	1-4				
		Defog	ON ←	Mode	Manual/Auto		
Level	Low/Medium/High						
Return							
		Off					
Lens	Auto Focus ←						
		Reset ←					
Next Page	←	System Info ←	←	Version No. xxxxxxxx			
			Return				
		OSD Auto Save & Exit	Off/On				
		Page Up					
		Return					
		Return					
Default							
Exit	Save Yes No Cancel						



www.honeywell.com/security
+1 800 323 4576
(North America only)

www.honeywell.com/security/uk
+1 44 (0) 1928 754 028
(Europe only)

www.asia.security.honeywell.com
+86 21 221 96888
(Asia Pacific only)

Document 800-24001 – Rev A – 01/2018