

# 2X-AT-FR

## Addressable fire panel repeater w touchscreen

### Overview

The new 2X-A series life safety control systems bring the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. Based on 2X series learned experience and with complete backwards compatibility, the new 2X-A features an attractive contemporary design that fits with any decor. With improved robustness, manufactured in metal, special plastics and easy electronics removal, it allows painting in any colour. The main controls are easily located using an improved and robust jog dial.

With high power loop addressable detection, a full line of easily configured option cards and modules, as well as USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panel repeaters supplied in local language come with a 2010-2-NB network board already fitted. Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It and has its own power supply, 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

This version of 2X-A panels includes a 7 inches touchscreens improving the user experience thanks to the more intuitive user interface.


### Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for text.

Network compatible with existing panels, repeaters (existing and new) and conventional panels.

### Approvals & compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- WEEE / RoHS compliant

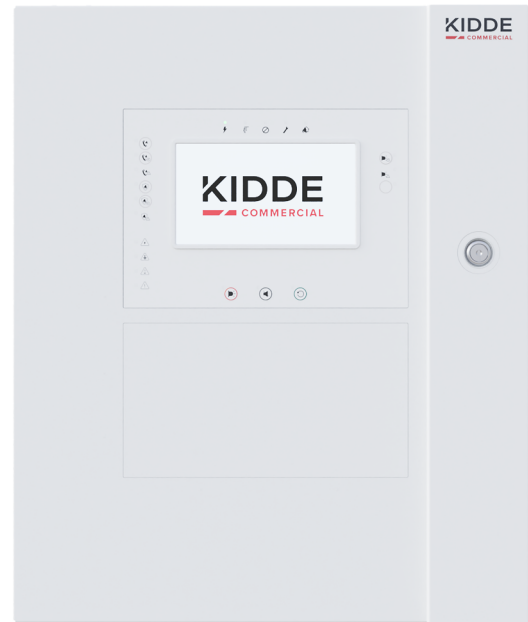

### Details

- Local or global repeater with or without global control functionality
- 7" touchscreen
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Improved Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with robust painted steel door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- Up to 72 hours standby time and 30 minutes alarm
- 3 USB ports with memory stick support and RS232 for printer support
- 3 operator level menu structure (20 usernames and passwords)
- Email notification for events directly from the panel (4 user accounts)
- History log memory for 9999 events
- Backwards compatible, supporting site retrofit/upgrades, expansions, replacement
- Comes standard fitted with network board

# 2X-AT-FR

## Addressable fire panel repeater w touchscreen

### Especificaciones técnicas

#### General

Interfaz usuario	Sin controles de Bomberos
Tamaño de la red (nodos)	hasta 64

#### Eléctrico

Tipo de fuente de alimentación	VAC
Voltaje de funcionamiento	110 / 240 VAC (+10%/-15%), 50 / 60 Hz (±5%) Cable type: 3 x 1.5 mm <sup>2</sup> (live, neutral, earth)
Consumo de corriente	Nom. 0.6 / 1.3 A, Max. 1.5 A / 3.15 A Fuse rating: 2 / 4 A

#### Entrada

Cantidad de entradas	2
Ratio y tipo de entrada	150 mA (max. Load), Cable type: Recommended 2 core 1.5 mm <sup>2</sup> twisted pair
Programable	2
Terminación	15 kohm

#### Salida

Ratio y tipo de salida	Cable type: Recommended 2 core 1.5 mm <sup>2</sup> twisted pair
Potencia auxiliar	1 resetable, 500 mA, 19.5 to 28 VDC (24 VDC nominal)
Terminación	15 kohm

#### Batería en reposo

Capacidad	Max. 2 x 12 V, 18 Ah (use supplied cables)
Cargando	27.3 V at 20°C ; 36 mV/°C
Umbral de aviso de batería baja	23.6 VDC ± 1% at 25°C
Baterías soportadas en el alojamiento	Max. 2 x 12 V, 18 Ah (use supplied cables)

#### Físico

Factor de forma	Grande
Dimensiones físicas	446 x 536 x 164 mm (W x H x D)
Peso neto	7.4 kg (without battery)
Shipping weight	10.1 kg
Color	Blanco (RAL 9003)
Tipo de Montaje	Montaje en Superficie
Entradas de cable	18 (20 mm) / 2 (20 mm) / 2 removable plates (top / bottom / back)
Material	Acero (pintado)

#### Medioambiental

Temperatura de funcionamiento	-5 to +40°C
Temperatura de almacenamiento	-20 to +50°C
Humedad relativa	10 to 95% noncondensing
Entorno	Interior
Clasificación IP	IP30, indoor use only

#### Regulador

Cumplimiento	CPD, RoHS, WEEE
Certificación	EN54-13, EN54-2, EN54-21, EN54-4

#### Output

General Fire + Fault supervised	2, 350 mA, 19.5 to 28 VDC (24 VDC nominal)
General Fire + Fault relay	2