

# DC127

## Contacto magnético para empotrar.

### Press-Fit Contact

---

The DC121 press fit switch is an 11 mm diameter magnetic contact with wire leads. Use no glue or screws to mount; small ribs on the housing hold the contact in place. Heavy-duty housing resist crushing from swelling wood. An extra wide gap version, DC127, is available for applications that may be prone to false alarms caused by loose fitting doors. The DC222 is a variant with a change-over contact type.

### Applications

---

For recessed applications, either indoor or outdoor. Also useful in protecting china cabinets or closets, double-hung windows and aluminium windows.



### Detalles

---

- 11 mm press-fit mounting; no screws or glue needed
- Attractive, added security of recessed installation
- Heavy-duty housing resists crushing
- Available in different cable lengths
- Tamper loop provided

# DC127

## Contacto magnético para empotrar.

### Technical specifications

---

#### General


|                    |                   |
|--------------------|-------------------|
| Tipo de Aplicación | Montaje empotrado |
| Tipo de contacto   | NC                |
| Conectividad       | 4 wires, 2 m      |

#### Wired/wireless

|                          |              |
|--------------------------|--------------|
| Wired-wireless           | Cableado     |
| Brecha de funcionamiento | 31 mm (max.) |

#### Physical

|                     |                    |
|---------------------|--------------------|
| Dimensiones físicas | 11 x 33 mm (Ø x L) |
| Colour              | Blanco             |

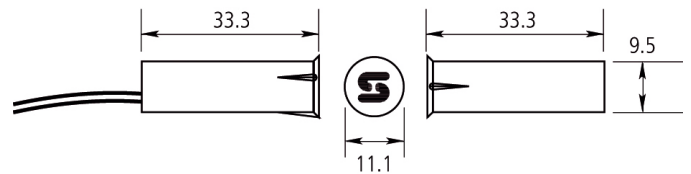

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 5 May 2023 - 9:33