

## QUICK START GUIDE

### 1] PRODUCT PRESENTATION




KEY-ASMAKA KEY-ASMAKD    KEY-AFMAKA    KEY-SSMAKA KEY-SSMAKD KEY-SSMOKA    KEY-SFMAKA KEY-SFMAKD KEY-SFMOKA

- Architrave or standard UK single gang size
- Flush or surface mounting
- Keyed alike or keyed to differ
- Faceplates manufactured in 304 grade stainless steel and laser engraved with "ON" and "OFF" for durability
- Surface mount units provided with an aluminium shroud
- Brushed stainless steel finish
- Supplied with 2 x stainless steel screws

Feature	Description
<b>Material</b>	304 stainless steel (faceplates)
<b>Contact Rating</b>	2A @ 24Vdc
<b>Mechanical Life</b>	500,000 cycles
<b>Operating Humidity</b>	0-95% relative humidity
<b>Output Contact</b>	DPDT





### 2] DIMENSIONS

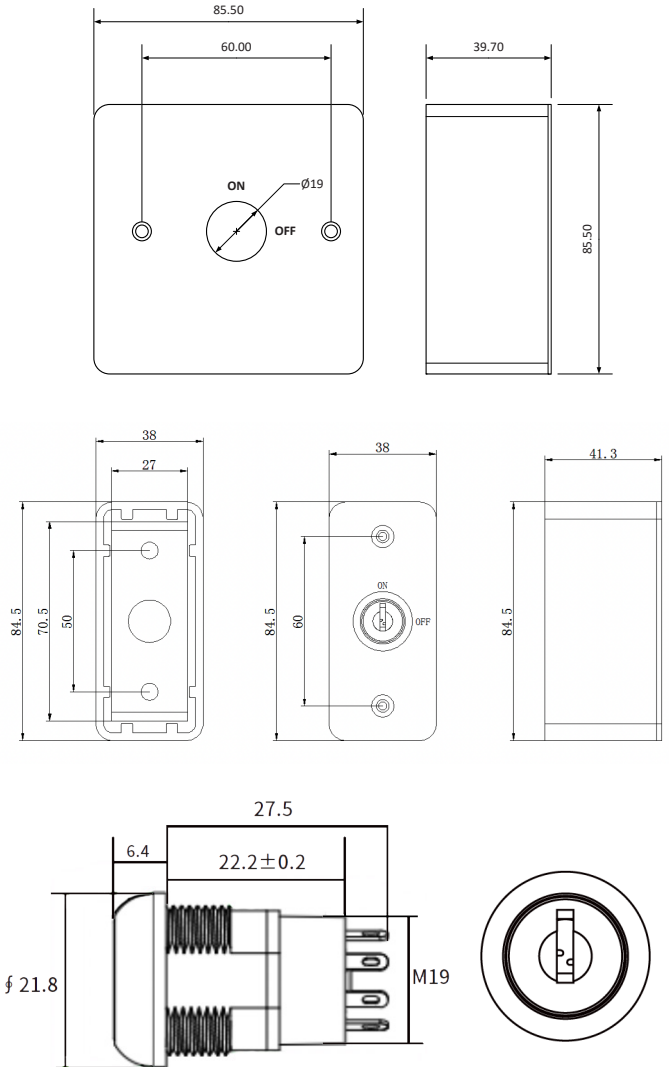

### 3] WIRING

- DPDT
- Connections suitable for a push-to-make circuit
- Max load: 2A @ 24Vdc

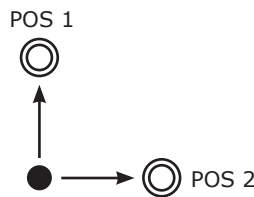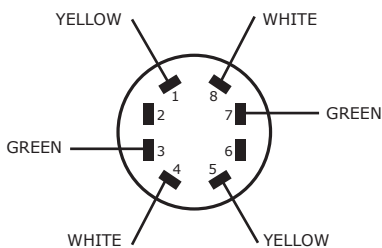

DOUBLE POLE

	Position	Description
POS 1	Yellow: COM (1)	
	Green: NO (3)	
	White: NC (8)	
POS 2	Yellow: COM (5)	
	Green: NO (7)	
	White: NC (4)	