


# VT09341D

## Apartment Outdoor Station

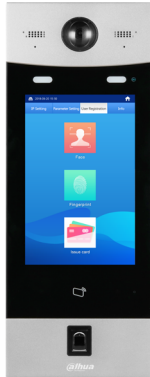

### Technical Specification

Model	VT09341D
-------	----------

#### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
Image Sensor	1/2.7" 2MP CMOS
Auto Gain Control	White Light
Lens	4mm
Angle of View	H:82°, V: 62°, D:103°
Day/Night	Color Image

#### Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Display

LCD Screen	10" IPS 800x1280
------------	------------------

#### Operation Mode

Keypad	Touch Screen
Reader	Mifare Card Fingerprint, 3000
Face Recognition	10,000 Face data, local recognition Recognition speed: 0.5s

### Features

- 10-inch IPS touch screen
- Night vision
- 2MP CMOS camera
- Unlock via face recognition, password, card, fingerprint and remotely unlock
- Aluminium alloy plate, IK07, IP65(Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Support audio and video advertising



### Approaching Induction

Body Approaching	0.6m
------------------	------

### Interface

Alarm In/Out	2/2
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Wiegand In/Out	1/1


### Network

Ethernet	10M/100Mbps
Network Protocol	TCP/IP


### General

Ingress Protection	IK07, IP65(Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Tamper Switch	1
Installation	Flush
Material	Tempered Glass Aluminum
Power	24V
Power Consumption	Work ≤24W
Working Temperature	-20°C to +60°C
Relative Humidity	10%RH-95%RH
Dimensions	475mm×174mm×58mm
Weight	2kg

Dimensions

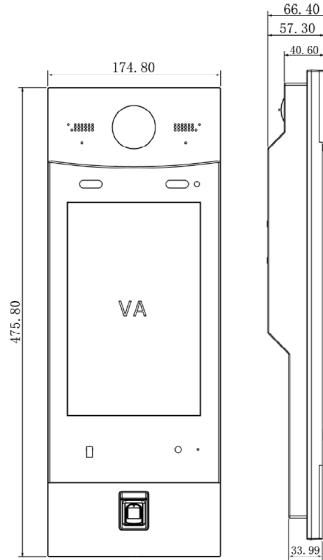

View Area

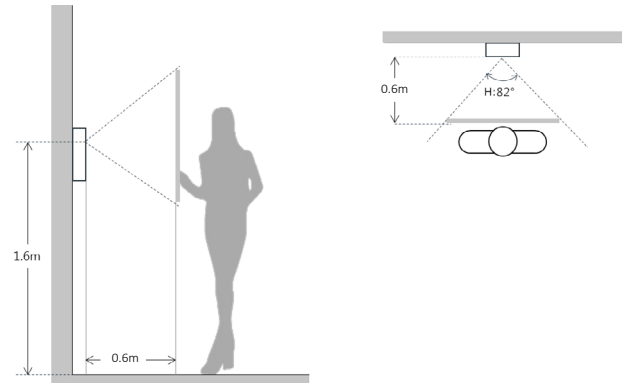

Application

