

ASW377

Sirena con flash para montar en pared de exterior de alta potencia. IP66. Roja

General

The ASW377 is a high output electronic sounder with beacon for fire alarm applications. It offers an IP66 rating which makes it ideal for outdoor applications. It also features a special base containing all wiring connections and allow for easy removal/placement of the sounder. To allow more flexibility the user can select between 64 tones, have the option of a 3rd stage tone and can select between different flash modes. With an EN54-23 approved coverage pattern of W-2.4-7.5 for the beacon, each ASW377 may be mounted up to 2.4m high and cover a square room of 7.5 x 7.5m with a single device.

Easy and Fast Installation

The ASW377 sounder-beacon allows faster installation and maintenance thanks to an innovative mounting base. Connections are made to the base during the initial wiring phase, resulting in faster and more reliable installations. In addition, the head clicks into place and is fixed by four quarter turn fasteners, avoiding the need to screw up four individual screws thus enabling faster installation and accurate seal compression for weatherproofing.

Efficient and versatile

The ASW377 provide high sound output at a low current, reducing power requirements and system cost. The sounder is supplied with a volume control as standard, allowing final audio adjustments to be made during installation.

With a choice of 64 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation. A second and third tone are available for additional sound requirements and are separately controlled.

IP66 as standard means that the ASW377 can be installed in almost any location.



Detalles

- High sound output
- 64 Tones user selectable
- Automatic synchronisation
- Volume control and adjustable flash rate
- Mounting base with wiring to the base
- Three stage alarm support
- IP66 Weatherproof
- EN54:23 and CPD Certified

ASW377

Sirena con flash para montar en pared de exterior de alta potencia. IP66. Roja

Especificaciones técnicas

General

Monitorización de línea Polarised input

Eléctrico

Voltaje de funcionamiento 17 to 60 VDC

Consumo de corriente 10 to 50 mA @ 24 VDC Sounder (tone dependant)
65 mA @ 0.5 Hz (Beacon)

Sirena

Nivel de salida 104 to 116dB(A) @ 24 VDC (Sound output @ 1 m, tone dependant)
Continuous operation

Tonos seleccionables 64

Sincronización Phased start, Automatic synchronisation

VAD

Cobertura de la planta up to 7.5 x 7.5 m

Físico

Dimensiones físicas 166 x 189 x 149.5 mm (W x H x D)

Peso neto 1.2 kg

Altura de montaje up to 2.4 m

Medioambiental

Temperatura de funcionamiento -25 to +70°C


Humedad relativa 5 to 95% noncondensing

Clasificación IP IP66

EN54-23 rating

Light coverage W-2.4-7.5

EN54-23 Coverage: W-2.4-7.5

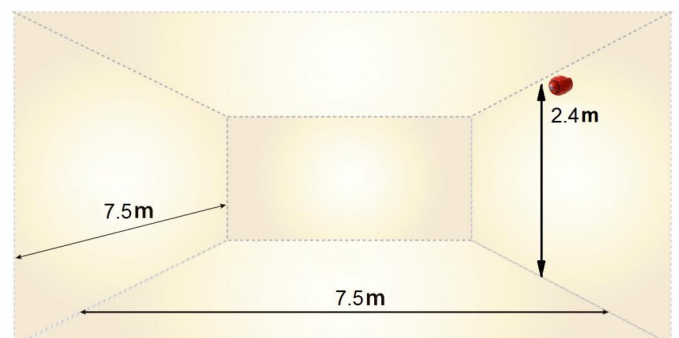

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 4 June 2024 - 11:15