

# HD ANALOG IR MOTORIZED VF DOME CAMERA


DI-390AMVF



MODEL	DI-390AMVF
Image Sensor	1/3" CMOS
Image Format	16:9
Effective Pixels	1984(H)×1225(V)
Scanning System	Progressive
Resolution	Digital:1920x1080, Analog:960H
Min. Illumination	0.01Lux
Day & Night	True Day&Night (ICR)
IR LED	3 LED Array (25m)
OSD Menu	Available via CoC Only (11 Languages)
CoC Support	Yes
Day & Night Mode	EXT, Color, B&W, Auto
Backlight Compensation	Off/BLC/HSBLC
S/N Ratio	≥72dB (AGC Off)
White Balance	ATW,AWC,Indoor,Outdoor,Manual,AWB
Noise Reduce	3D-DNR For AHD/CVI/TVI, 2D-DNR For CVBS
Video Output	AHD / CVI / TVI / CVBS + PAL / NTSC (Signal Selectable via DIP Switch on cable)
Defog	Off/On
Privacy Mask	On/Off (4 Areas)
Motion Detection	On/Off (4 Areas)
D-Effect	Freeze, Mirror, Negative Image
Lens (Field of View)	2.8-12mm Motorized VF with Auto Focus - Control over CoC only (92°-29°)
Power	DC12V±10%, ~400mA
Operation Temp.	-30°C~+50°C
Waterproof	IP66
Dimension	129.5*119*104mm
Net weight	476g

## Main Features:

- Sensor: 1/3", 2 Mega-Pixel
- Selectable Output: 1080P AHD / CVI / TVI / Analog
- Lens: 2.8-12mm Motorized VF with Auto Focus
- True Day & Night – ICR
- IR Range: 25m (3 Array LED)
- IP66
- CoC Support
- Weight: 476g
- Power: DC 12V, ~400mA

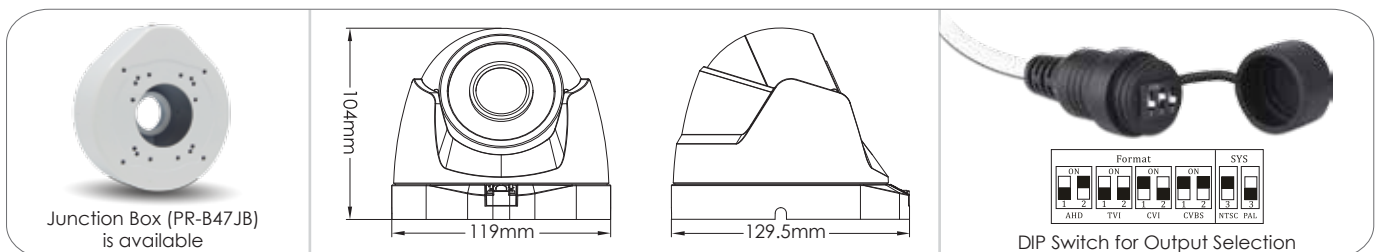

Junction Box (PR-B47JB) is available

DIP Switch for Output Selection