


HARPER 200

Cod. HP200SE110242



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 h; minimum autonomy 1.5 h. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	-

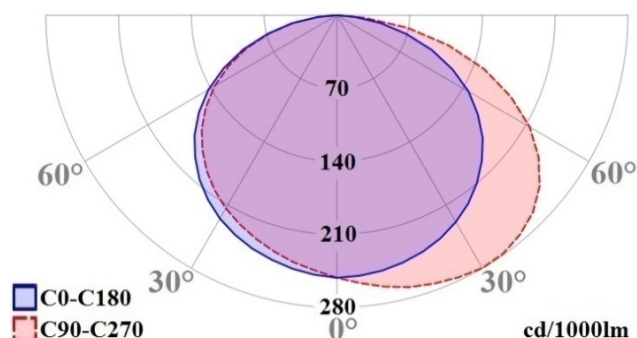

HARPER 200

Cod. HP200SE240142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 360 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 h; minimum autonomy 1 h. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360 lm
Lum. flux in Maintained mode	-

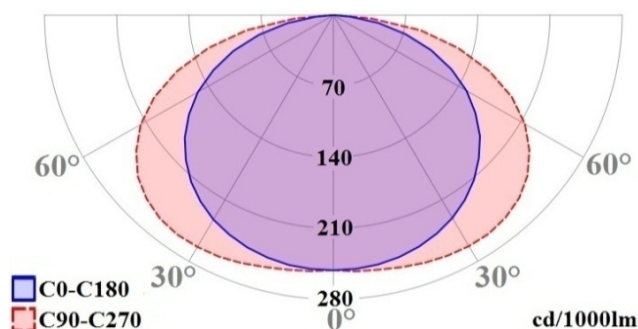

HARPER 200

Cod. HP200SE110542



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 24 h; minimum autonomy 4 h. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.


Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	4 h
Total charging time	24 h
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	-

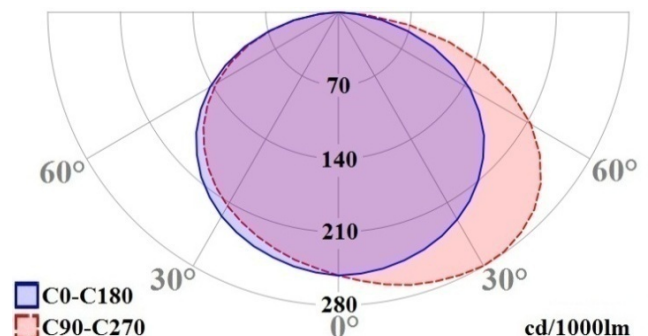


INIM ELECTRONICS s.r.l.

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepredone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

HARPER 200

Cod. HP200SE240242



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 360 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 24 h; minimum autonomy 2 h. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.


Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications


Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	2 h
Total charging time	24 h
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360 lm
Lum. flux in Maintained mode	-

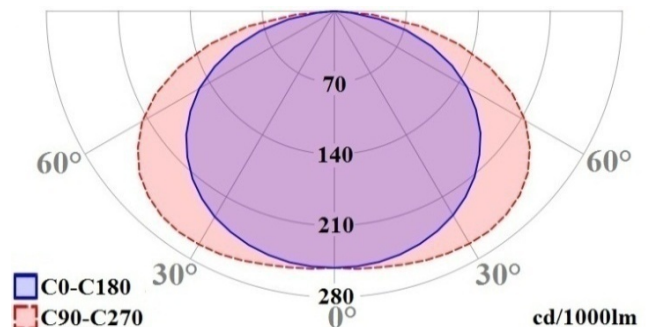

HARPER 200

Cod. HP200SE110265



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 h; minimum autonomy 1.5 h. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1.5 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	-

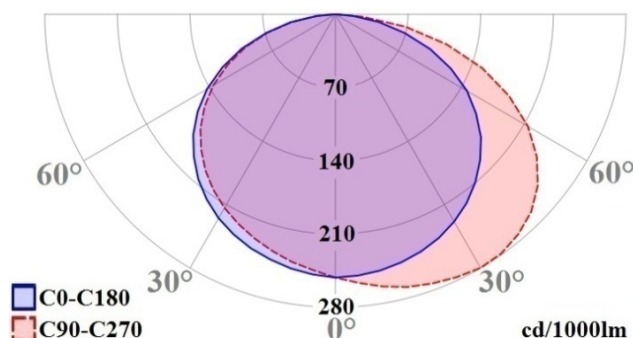

HARPER 200

Cod. HP200SE240165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 360 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 12 h; minimum autonomy 1 h. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	1 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360 lm
Lum. flux in Maintained mode	-

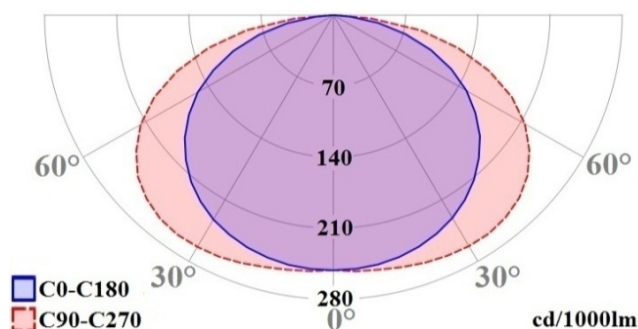

HARPER 200

Cod. HP200SE110565



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 180 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 24 h; minimum autonomy 4 h. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	4 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180 lm
Lum. flux in Maintained mode	-

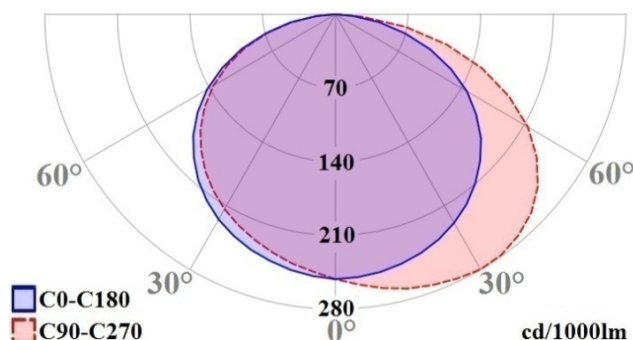

HARPER 200

Cod. HP200SE240265



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Public Show; luminous flux in emergency 360 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 24 h; minimum autonomy 2 h. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Public Show
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	1 W
Current absorbed from Mains	120 mA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	2 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Additional information	Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360 lm
Lum. flux in Maintained mode	-

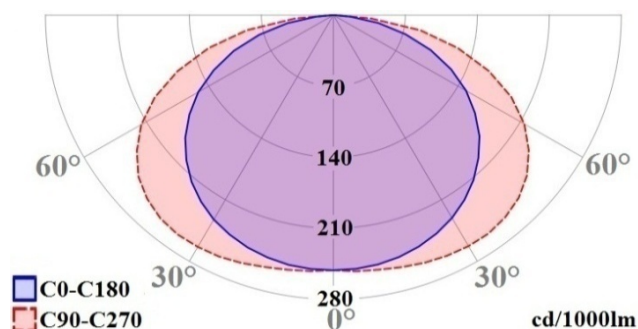

HARPER 200

Cod. HP200AE180142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

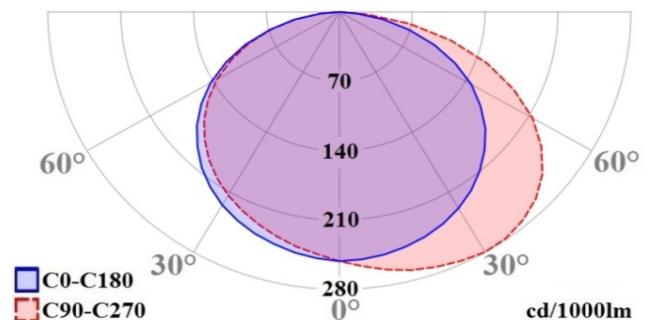

HARPER 200

Cod. HP200AE360142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

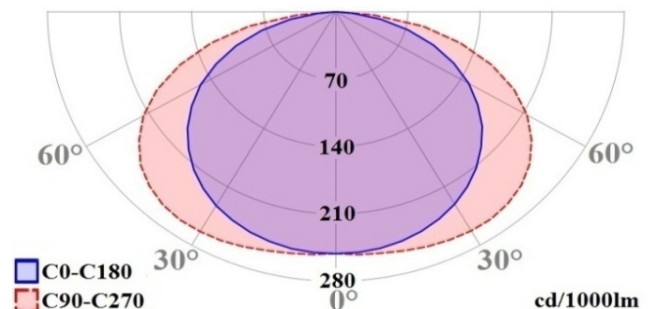

HARPER 200

Cod. HP200AE180342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

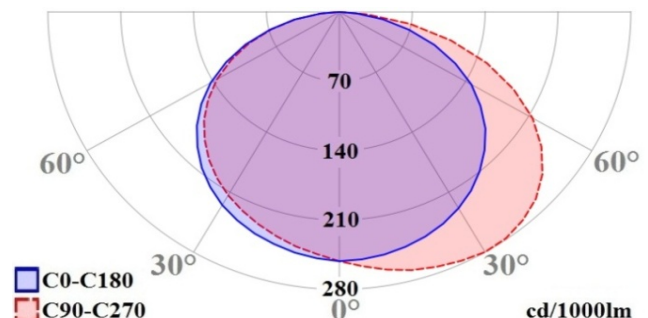

HARPER 200

Cod. HP200AE360342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO₄ batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

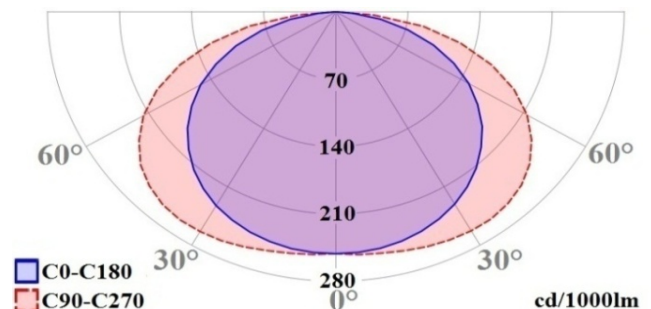

HARPER 200

Cod. HP200AA180142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

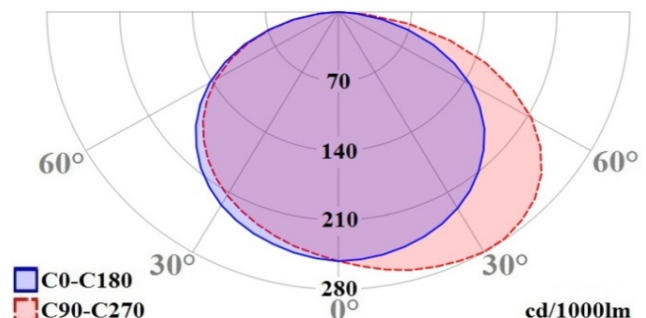

HARPER 200

Cod. HP200AA360142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

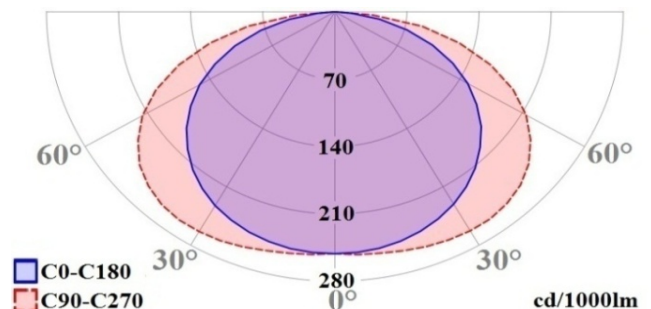

HARPER 200

Cod. HP200AA180342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

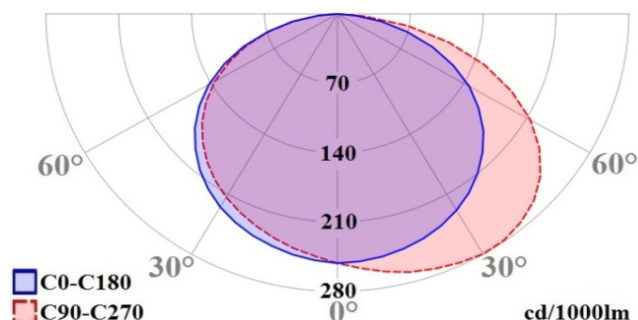

HARPER 200

Cod. HP200AA360342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

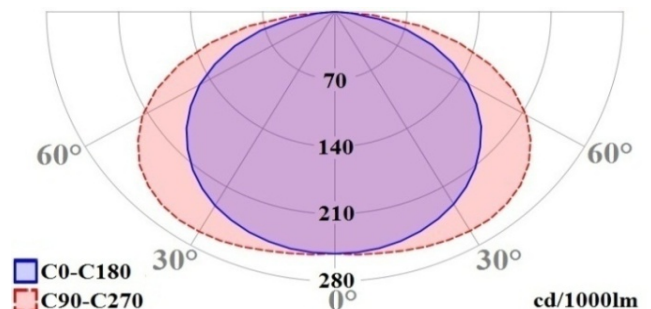

HARPER 200

Cod. HP200AE180165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

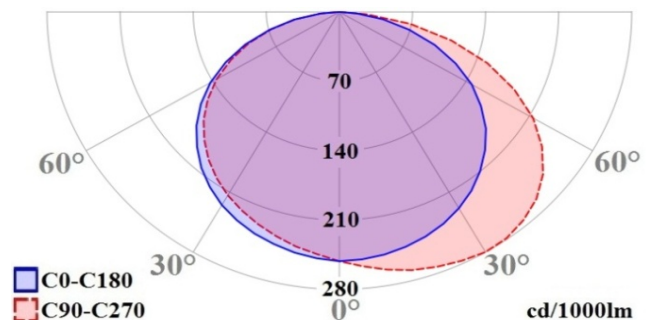

HARPER 200

Cod. HP200AE360165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

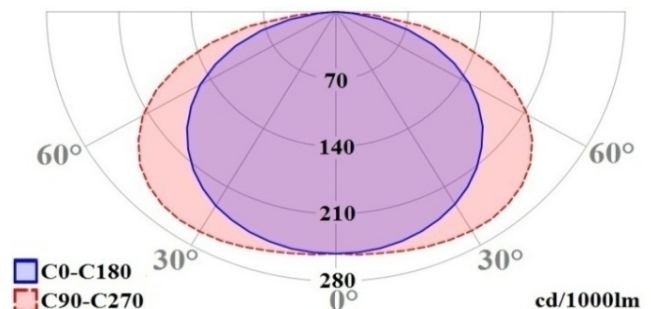

HARPER 200

Cod. HP200AE180365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
------------------------	---

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

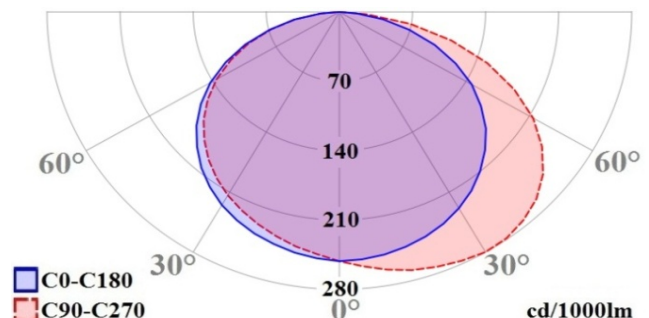

HARPER 200

Cod. HP200AE360365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO₄ batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

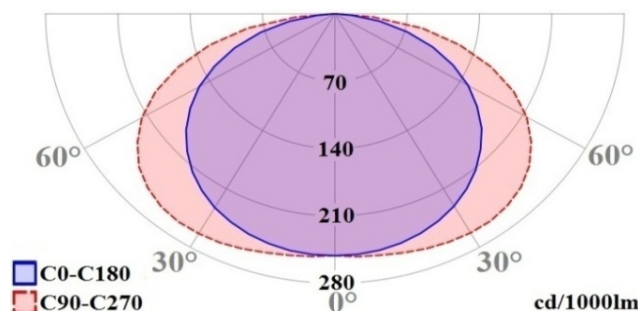

HARPER 200

Cod. HP200AA180165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

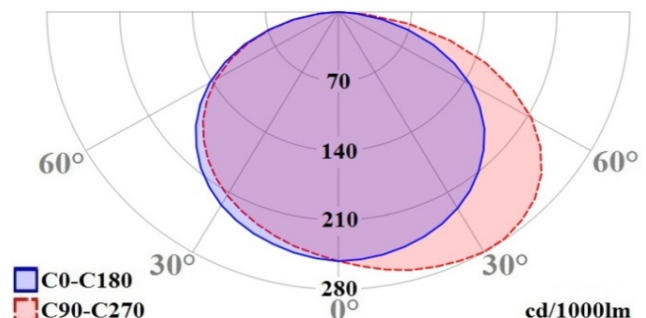

HARPER 200

Cod. HP200AA360165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

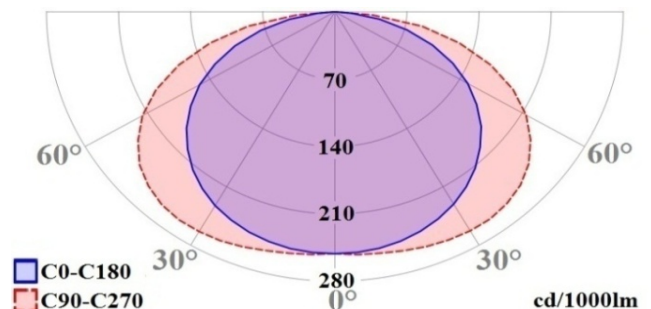

HARPER 200

Cod. HP200AA180365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

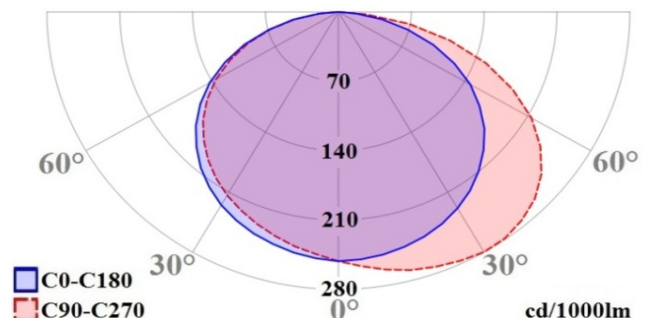

HARPER 200

Cod. HP200AA360365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description


Product series	HARPER 200
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Dedicated terminals for <i>inhibit mode</i> and <i>rest mode</i> Test button
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

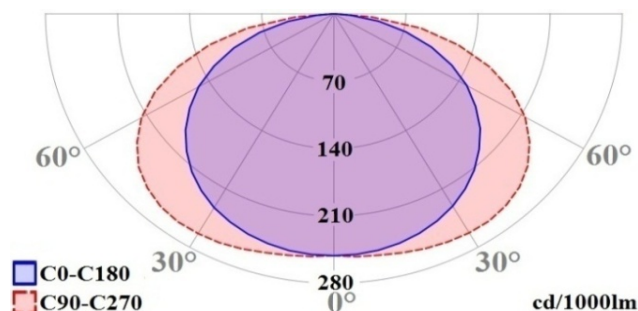

HARPER 200

Cod. HP200BE180142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

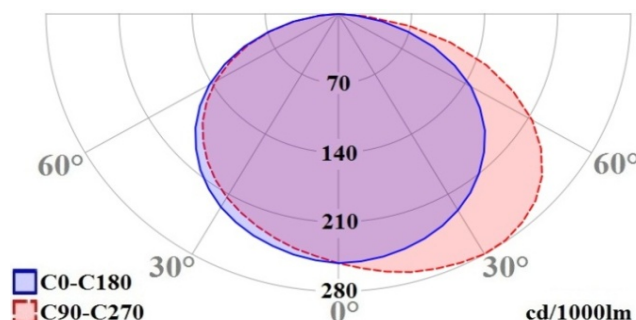

HARPER 200

Cod. HP200BE360142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

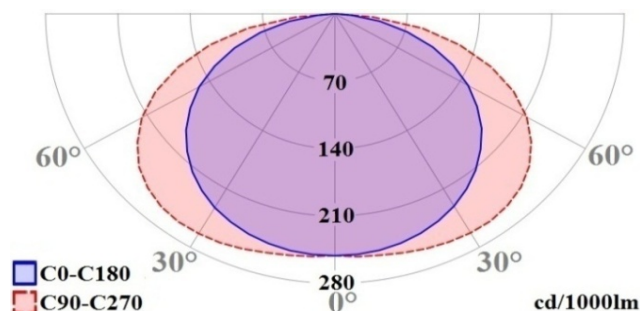

HARPER 200

Cod. HP200BE180342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

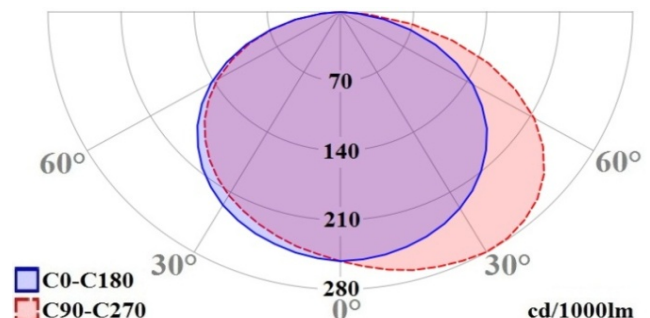

HARPER 200

Cod. HP200BE360342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

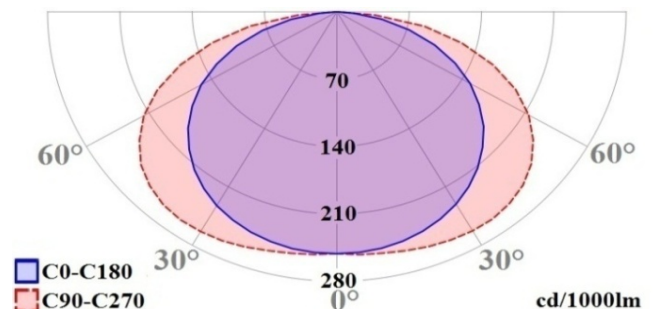

HARPER 200

Cod. HP200BA180142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

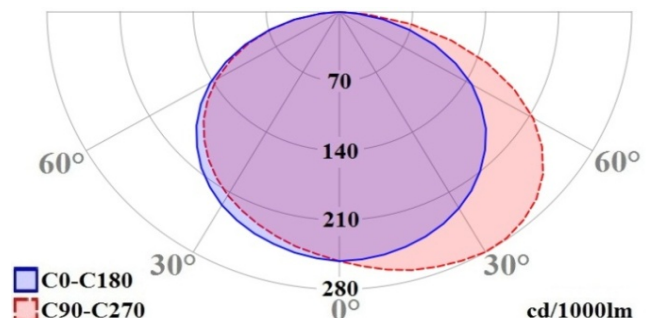

HARPER 200

Cod. HP200BA360142



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfuction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

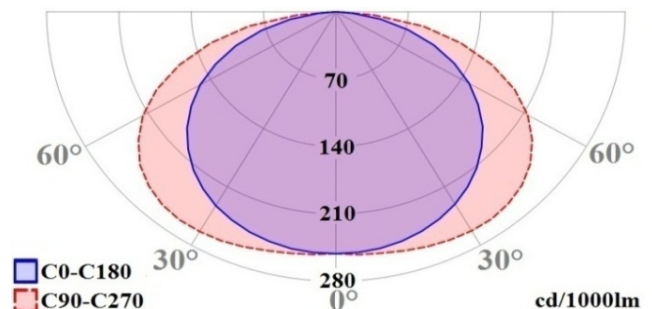

HARPER 200

Cod. HP200BA180342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

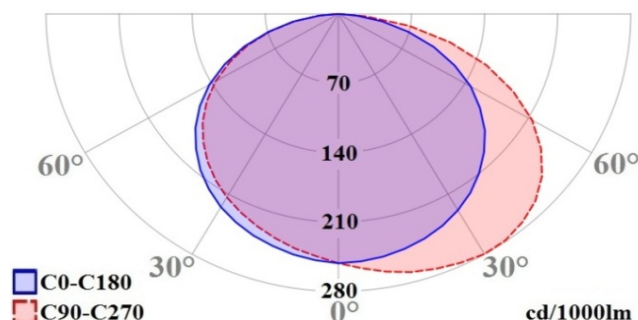

HARPER 200

Cod. HP200BA360342



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

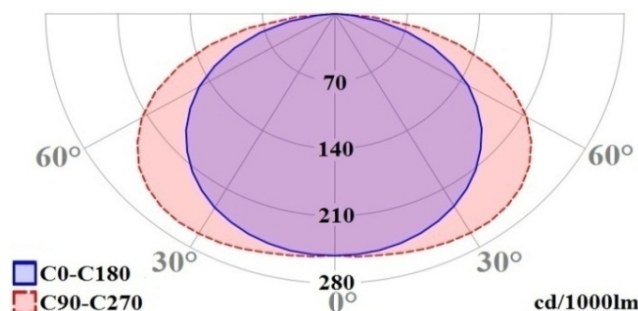

HARPER 200

Cod. HP200BE180165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

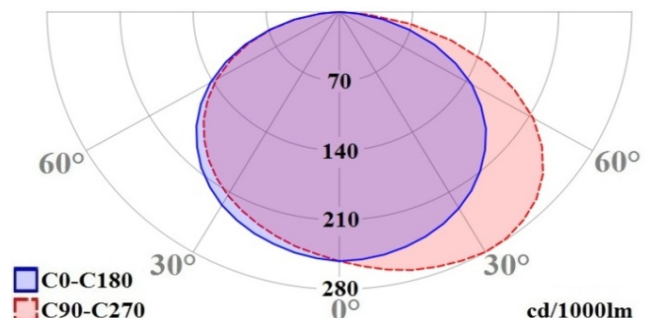

HARPER 200

Cod. HP200BE360165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

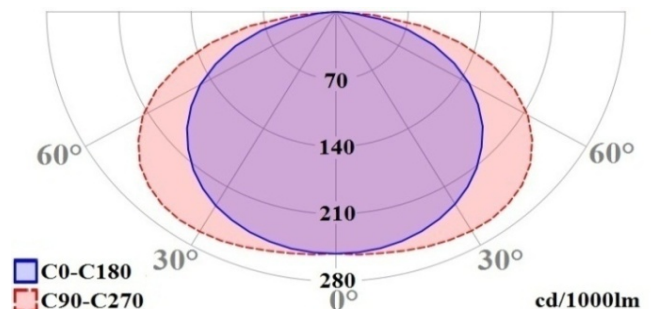

HARPER 200

Cod. HP200BE180365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	-

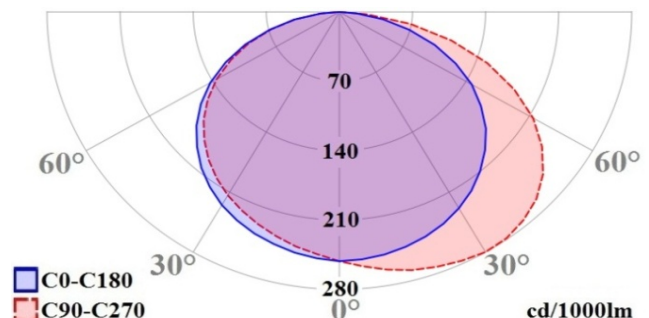

HARPER 200

Cod. HP200BE360365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	2 W
Maximum absorbed power in VA	3.5 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h


Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Additional information	Test button
------------------------	-------------

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
------------------------	---


Photobiological risk	RG0 (exempt) according to EN 62471
----------------------	------------------------------------

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	-

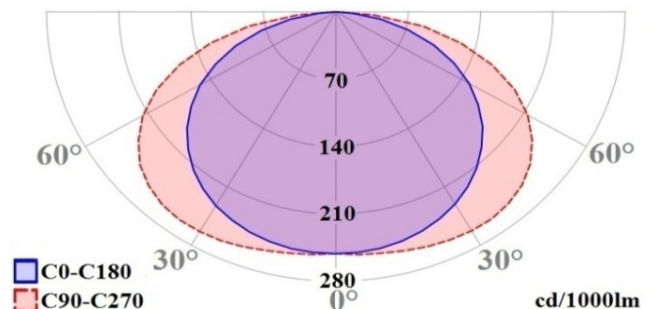

HARPER 200

Cod. HP200BA180165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	6 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

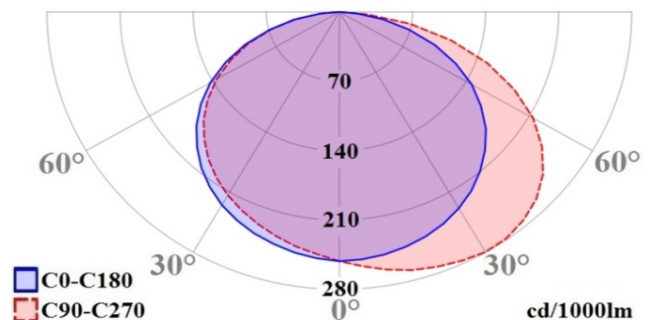

HARPER 200

Cod. HP200BA360165



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 1 h, 1.5 h selectable. Function/Malfuction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	1 h - 1.5 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

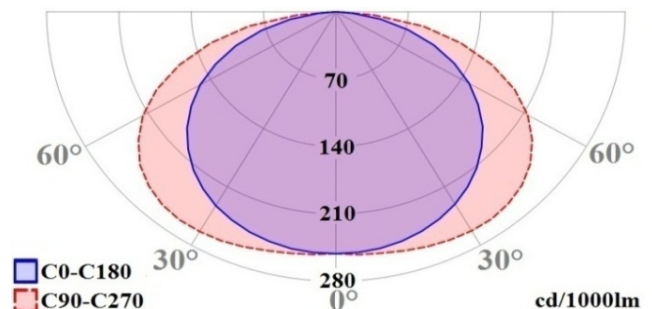

HARPER 200

Cod. HP200BA180365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 180-135 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	12 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	180-135 lm
Lum. flux in Maintained mode	80 lm

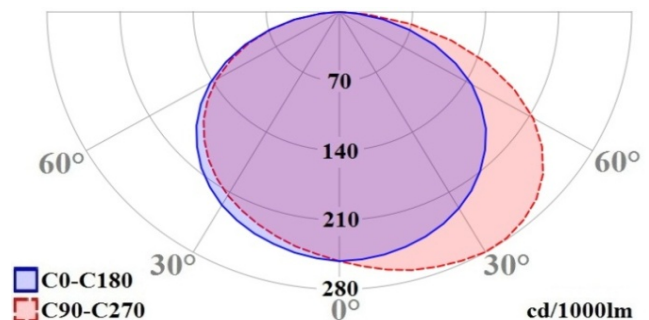

HARPER 200

Cod. HP200BA360365



Introduction

HARPER200 series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; settable luminosity in maintained mode; luminous flux in emergency 360-270 lm. N.2 rechargeable LiFePO4 batteries @ 3.3 Ah included; charging time 24 h; minimum autonomy 3 h, 4 h selectable. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	9.0 VA
Battery	N.2 LiFePO ₄ 3.2 V 3.3 Ah
Minimum autonomy	3 h - 4 h
Total charging time	24 h

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	230 Vac dedicated, 3 luminosity levels settable via Test button
Additional information	Test button


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Min. luminous flux in emergency	360-270 lm
Lum. flux in Maintained mode	170 lm

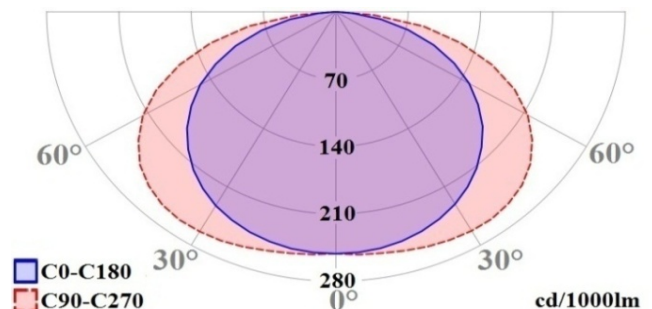

HARPER 200

Cod. HP200LA180042



Introduction

HARPER200 series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 180 lm. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Central Battery (centralized power supply)
Type	-
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	6 VA
Battery	-
Minimum autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Luminous flux	180 lm

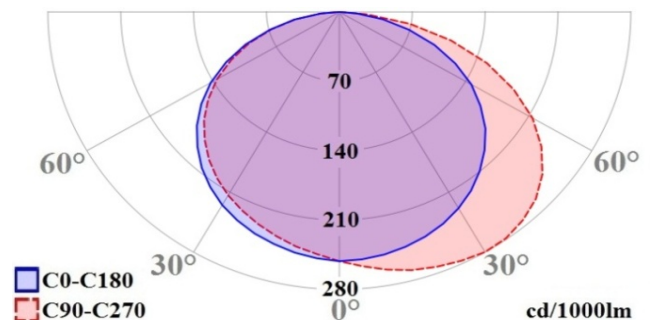

HARPER 200

Cod. HP200LA360042



Introduction

HARPER200 series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 360 lm. Protection rating IP42, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Central Battery (centralized power supply)
Type	-
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	7.0 W
Maximum absorbed power in VA	11.5 VA
Battery	-
Minimum autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP42
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Luminous flux	360 lm

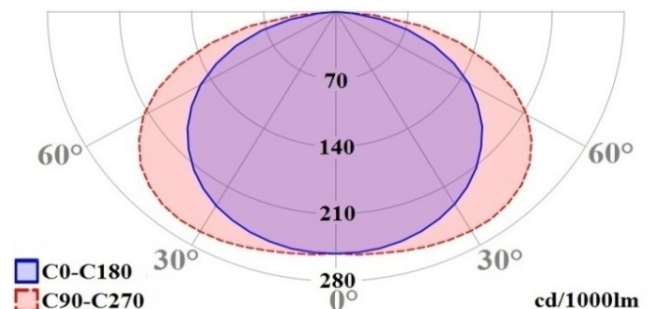

HARPER 200

Cod. HP200LA180065



Introduction

HARPER200 series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 180 lm. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Central Battery (centralized power supply)
Type	-
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm


Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	3.5 W
Maximum absorbed power in VA	6 VA
Battery	-
Minimum autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C


Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Luminous flux	180 lm

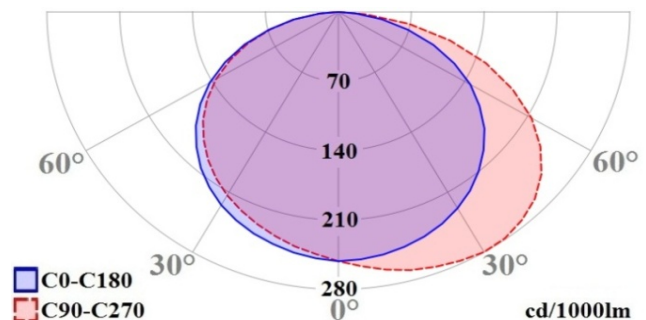

HARPER 200

Cod. HP200LA360065



Introduction

HARPER200 series LED emergency light for centralized power supply system with self-extinguishing RAL9003 white polycarbonate body and PMMA reflector with no photobiological risk (RG0). Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Luminous flux 360 lm. Protection rating IP65, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 137 x 319 x 38 mm.

Description

Product series	HARPER 200
Product type	Emergency luminaire
Version	Central Battery (centralized power supply)
Type	-
Dimensions	Height 137 mm, Length 319 mm, Depth 38 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 Vac, 50-60 Hz
Absorbed power in W	7.0 W
Maximum absorbed power in VA	11.5 VA
Battery	-
Minimum autonomy	-
Total charging time	-

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Diffuser	PMMA laser finish
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C

Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7
Photobiological risk	RG0 (exempt) according to EN 62471

Light source	LED
Colour temperature	6000K
Luminous flux	360 lm

