


# CR255

**Selector electrónico para el cierre de puertas cortafuegos de doble hoja.**

## General

---

The CR255 is an electronic delay control unit for use with double-leaf fire doors. It allows for the release of the one leaf of the fire door to be slightly delayed to allow for the two leafs to close properly and in the correct sequence.

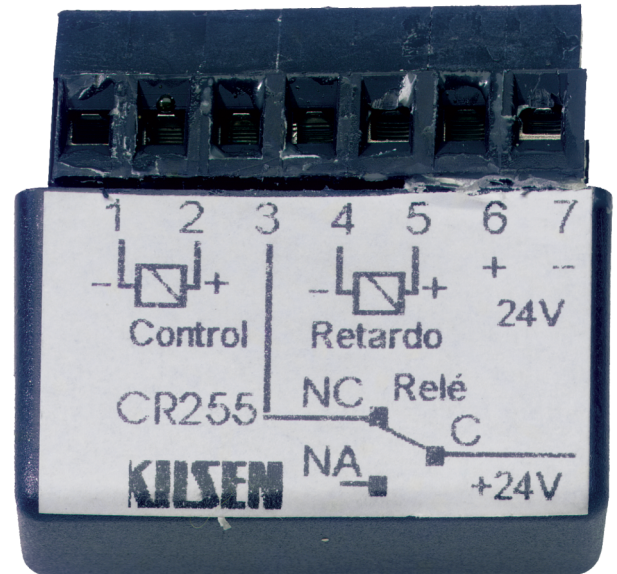

## Detalles

---

- Easy to install
- May be installed inside the door release magnet housing
- 24 VDC operation

# CR255

Selector electrónico para el cierre de puertas cortafuegos de doble hoja.

## Especificaciones técnicas

---

### Eléctrico

---

Voltaje de funcionamiento 20 to 27 VDC

---

Requisitos máximos de corriente 0.5 A

---

### Físico

---

Dimensiones físicas 40 x 35 x 12 mm

---

Peso neto 24 g

---

Color Negro

---

### Medioambiental

---

Antivandálico No

---

Temperatura de funcionamiento -10 to 60°C

---

Temperatura de almacenamiento -20 to 70°C

---

Humedad relativa 0 to 95% noncondensing

---

### Regulador

---

Cumplimiento CE, REACH, RoHS 2

---

### Electrical

---

Delay time 5 s

---