

DIVA

Cod. DVBA110242

**IP42 - IP65****Introduction**

DIVA series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall or ceiling installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 195 lm. Rechargeable LiFePO₄ battery @ 1.5 Ah included; charging time 6 H; minimum autonomy 2 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP42 or IP65 with accessory kit, double insulated, operating temperature 0 °C ÷ 50 °C. Dimensions: 100 x 230 x 22.5 mm.

Description

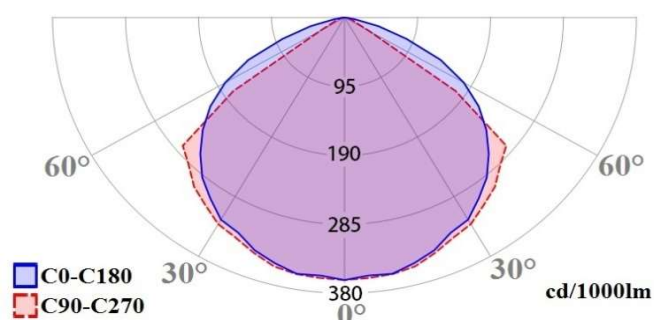
Product series	DIVA
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 100 mm, Length 230 mm, Depth 22.5 mm

Technical specifications

Installation	Wall, ceiling
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	4.0 W
Maximum absorbed power in VA	6.0 VA
Battery	N.1 LiFePO ₄ 3.2 V 1.5 Ah
Autonomy	2 H
Total charging time	6 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP42 (IP65 with accessory kit)
IK Protection rating	IK07
Insulation class	II
Operating temperature	0° - 50°C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Min. luminous flux in emergency	195 lm
Lum. flux in Maintained mode	195 lm

**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz