

PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-390AX10
I5PT-390AX4



Main Features:

- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- Preset position
- OSD Menu
- IP66 protection.
- Optical zoom
- 2MP "4in1" + PAL/NTSC
- 50m IR LED Array
- True Day/Night with ICR filter
- Noise reduction (3D-DNR)
- WB/AGC/BLC
- CoC Support

Camera Specification

| Model | I5-PTZ | |
|--------------------------|------------------------------|-----------------------------------|
| | I5PT-390AX10 | I5PT-390AX4 |
| Sensor | 1/3" CMOS | |
| Resolution | HD Analog | 2MP (AHD / CVI / TVI - 1920x1080) |
| | Analog | 700TVL |
| System | PAL/NTSC Selected by Presets | |
| Optical Zoom | x10 (5.1-51mm) | x4 (2.8-12mm) |
| Digital Zoom | No | |
| Minimum Focus Distance | 1.5M | |
| Horizontal Angle of View | H: 50.4°(Wide) to 5.4°(Tele) | 81.2°(Wide) to 22.6°(Tele) |
| | V: 29.7°(Wide) to 3°(Tele) | 51.5°(Wide) to 12.8°(Tele) |
| Sync System | Internal | |
| Min. Illumination | 0.01lux (0 Lux with IR On) | |
| Day & Night | Auto/Day/Night (ICR) | |
| S/N Ratio | >50dB | |
| Focus | Auto/Manual | |
| Auto Gain | Auto/Manual | |
| WDR | No | |
| White Balance | ATW/Manual/Outdoor/Indoor | |
| BLC | On/Off | |
| Shutter Speed | 1/50~1/10000 | |
| Sense Up | No | |
| Noise Reduction | 3D-DNR | |
| Stabilizer | No | |
| Flip | On/Off | |
| Iris | Auto | |
| Flickerness | No | |

Pan/Tilt Specification


| | |
|----------------------|---|
| Pan tilt Range | 250° Pan/ 65° Tilt |
| Pan tilt Speed | Max Preset Speed: 12°/Sec Manual: 0.5°~12°/Sec (Proprtional to Zoom) |
| Preset | 255 |
| Pattern | No |
| Auto Scan | No |
| Group | No |
| Schedule | No |
| Privacy Zone Masking | No |
| Park Function | Yes (Preset 1 Only) |

Communication Specification

| | |
|-------------------|----------------------------------|
| Data Type | CoC* (Control over Coax), RS-485 |
| Protocols | CoC / Pelco-D |
| Baud Rates | 2400 |
| Camera ID | 1 - 255 |
| Alarm I/O | No |
| On Screen Display | OSD menu, Camera position |

Mechanical

| | |
|-----------------------|-------------------------|
| IR Distance | 50m IR LED Array |
| Fan / Heater | No |
| Sunshield | Yes |
| Humidity range | <90% |
| Power Supply | 12VDC/2A (Not supplied) |
| Operation temperature | -20°C~+50°C |
| Dimensions | 225*175*94mm |
| Ingress Protection | IP66 |
| Weight | 920gr |

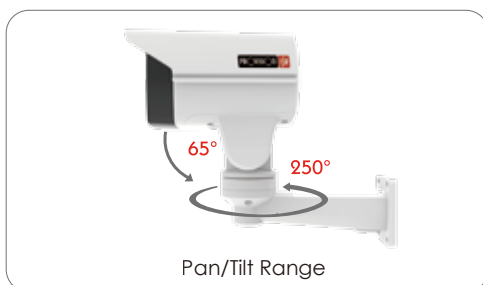

*CoC must be supported on the controlling unit as well

*CoC not supported in CVBS mode