

## DH-PFM905

---

### Integrated Mount Tester



### Features

- Support HDCVI/ AHD/ HDTV/ CVBS analog self-adaptive access and switch;
- Support audio and RS485 control;
- 4" IPS screen, 800x480 resolution, 16.7M colors;
- Support DC12V/1A longer power supply;
- Support video screen shot, video recording, record playback and data monitor;
- Standard dischargeable Li battery ;
- Dual LED torch light.

# DH-PFM905


## Specifications

<b>Model</b>	<b>DH-PFM905</b>
<b>Physical Port</b>	
Function Port	2*BNC port (video in and video out), 1*RS485, 1*Micro USB, 1*Audio In, 1*Reset, 1*12V/1A output, 1*charge input
<b>Video Test</b>	
Format	HDCVI/ AHD/ HDTVI/ CVBS
Resolution	720P25fps,720P30fps,720P50fps,720P60fps,1080P25fps,1080P30fps
Signal Level	1Vpp
Video Input/output	BNC
Camera Test	Real time video, PTZ control, audio test, full screen preview and 8x digital zoom, snapshot, record video(H.264)
HDCVI OSD	Camera configuration
<b>DC12V1A Output</b>	
Power Output	DC12V1A, $\Phi 4\text{mm} \times \Phi 1.6\text{mm}$ ( $\phi 0.16'' \times 0.06''$ )
<b>Audio Test</b>	
Audio Test	1 channel audio in
<b>PTZ Control</b>	
Port	RS485
Protocol	More than 30 protocols including Dahua, Pelco-D/P, Samsung, Panasonic, Lilin, Yaan etc.
Baud Rate	150, 300, 600, 1200, 2400, 4800, 9600, 19200bps
<b>Record Playback</b>	
Video Playback	Support single-frame playback, digital zoom, full-screen playback, faster rewinding and fast-forwarding, file deletion and the around file fast switching
Screenshots Playback	Support image zoom, full-screen demonstration, file deletion and the around file fast switching
<b>LED Light</b>	
Headlight	2*35lm LED light
<b>Storage</b>	
Reading port	Micro USB (USB mass storage)
Capacity	8GB flash (internal)
<b>System Specification</b>	
Screen	4.0 inch TFT 800*RGB*480(WVGA) resolution, 16.7M color, backlight brightness adjustable
Operation Method	10 control keys
Operation Setup	Chinese, English, French, German, Spanish, Russian, Turkish, Czech, etc.
Auto Power Off	Disable/ 5~60 minutes
Keyboard Tone	Enable/ Disable
Upgrade	Support online upgrade via a USB connection

## DH-PFM905

Certifications	
Certifications	CE/FCC
Electrical	
Charger	Input: 100V-240V~50/60Hz Output: 12V/1A, $\Phi$ 5.5mm(0.22")
Battery	Standard dischargeable 7.4V Li battery, 10.4Wh capacity, and working time can be about 5 hours
Environmental	
Working Temperature	-10°C ~ +55°C (14°F ~ 131°F)
Working Humidity	30%~90%
Construction	
Casing	Plastics
Dimensions	175mmx113mmx37mm(6.89"x4.45"x1.46")
Net Weight	0.38Kg(0.85lb)
Gross Weight	1.2Kg(2.65lb)

## Application

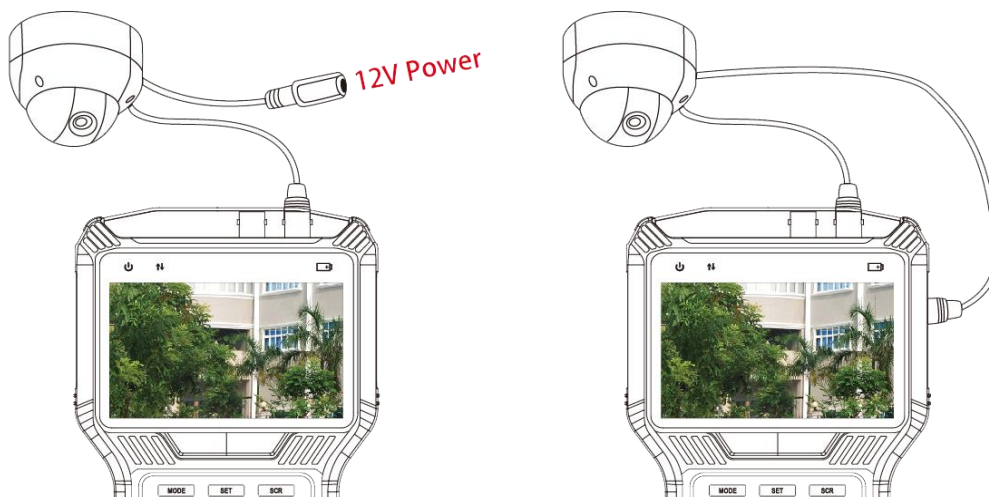

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.