



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Telephone: +86 (0) 21 6191 5666

Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM171000666401

Page: 1 of 31

TEST REPORT

Application No.: SHEM1710006664IT
Applicant: Zhejiang Dahua Vision Technology Co., Ltd.
Address of Applicant: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Manufacturer: Zhejiang Dahua Vision Technology Co., Ltd.
Address of Manufacturer: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
Factory: 1, ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
2, ZHEJIANG DAHUA ZHILIAN CO., LTD.
Address of Factory: 1, No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China
2, No.28, Dongqiao Road, Dongzhou Street, Fuyang District, Hangzhou, P.R.China.
Equipment Under Test (EUT):
EUT Name: IP CAMERA
Model No.: DH-IPC-EB5531P, DH-IPC-EB5531N, IPC-EB5531P, IPC-EB5531N,
DH-IPC-EB5531, IPC-EB5531, DH-IPC-EB5531P-M, DH-IPC-EB5531N-M,
IPC-EB5531P-M, IPC-EB5531N-M, DH-IPC-EB5531P-M12,
DH-IPC-EB5531N-M12, IPC-EB5531P-M12, IPC-EB5531N-M12, N55BS5
Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standards: 47 CFR Part 15, Subpart B:2016
Date of Receipt: 2017-09-06
Date of Test: 2017-09-07
Date of Issue: 2017-10-16

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Parlam Zhan
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM171000666401

Page: 2 of 31

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	Add Model	2017-10-16	/	Copy Based on SHEM170900595301

Authorized for issue by:			
Tested By	 _____ Bruce_tang /Project Engineer	2017-09-14 _____ Date	
Checked By	 _____ Zenger_zhang /Reviewer	2017-09-14 _____ Date	



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15,Subpart B:2016	ANSI C63.4	Class A	Pass
Radiated Emissions (30MHz-1GHz)	47 CFR Part 15,Subpart B:2016	ANSI C63.4	Class A	Pass
Radiated Emissions (above 1GHz)	47 CFR Part 15,Subpart B:2016	ANSI C63.4	Class A	Pass

InternalSource	UpperFrequency
Below 1.705MHz	30MHz
1.705MHz to 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5th harmonic of the highest frequency or 40GHz, whichever is lower

Declaration of EUT Family Grouping:

Note1: There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-IPC-EB5531P was tested since their differences are model number and appearance.

Note2: The report is copied from SHEM170900595301 to add models N55BS5 which are the same as the original tested model DH-IPC-EB5531P in electrical and electronic characters. So the new models in this report are deemed to fulfill the EMC requirements without testing.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY.....	5
4.4 STANDARDS APPLICABLE FOR TESTING	6
4.5 TEST LOCATION	7
4.6 TEST FACILITY	7
4.7 DEVIATION FROM STANDARDS.....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST.....	8
6 EMISSION TEST RESULTS.....	10
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	10
6.1.1 E.U.T. Operation.....	10
6.1.2 Test Setup Diagram.....	10
6.1.3 Measurement Data	10
6.2 RADIATED EMISSIONS (30MHz-1GHz)	15
6.2.1 E.U.T. Operation.....	15
6.2.2 Test Setup Diagram.....	15
6.2.3 Measurement Data	15
6.3 RADIATED EMISSIONS (ABOVE 1GHz)	20
6.3.1 E.U.T. Operation.....	20
6.3.2 Test Setup Diagram.....	20
6.3.3 Measurement Data	20
7 PHOTOGRAPHS.....	25
7.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP.....	25
7.2 RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	26
7.3 RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP	27
7.4 EUT CONSTRUCTIONAL DETAILS	28-31



4 General Information

4.1 Details of E.U.T.

Power supply: 12VDC or POE
Cable: signal cable : about 0.5m

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop 1	LENOVO	R400	--
Switching Adapter 1	Aoepower	BSW0127-1210002	--
PoE Injector	SUPLET	LAS60-57CN-RJ45	--

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	3.2dB (9kHz to 150kHz)
		3.0dB (150kHz to 30MHz)
	Conducted Emission at mains port using VP	1.9 dB(9kHz to 30MHz)
	Conducted Emission at telecommunication port using AAN	2.4 dB(150kHz to 30MHz)
2	Radiated Power	3.5dB
3	Radiated emission	4.4dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)
4	Radiated Immunity	1.64dB
5	Conducted Immunity	0.96dB
6	ESD	6 %
7	EFT (Electrical Fast Transients)	5 %
8	Surge Immunity	5 %
9	Voltage Dips and Interruptions	4 %
10	20 system	1.5dB
11	Temperature test	1 °C
12	Humidity test	3%
13	DC power test	0.5 %



4.4 Standards Applicable for Testing

Table 1 : Tests Carried Out Under 47 CFR Part 15,Subpart B:2016

Item	Status
Conducted Emissions at Mains Terminals (150kHz-30MHz)	√
Radiated Emissions (30MHz-1GHz)	√
Radiated Emissions (above 1GHz)	√

× Indicates that the test is not applicable

√ Indicates that the test is applicable



4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2016-12-29	2017-12-28
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2017-05-17	2018-05-16
Line impedance stabilization network	EMCO	3816/2	SHEM019-1	2016-12-29	2017-12-28
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2017-08-01	2018-07-31
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2016-12-29	2017-12-28

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2016-10-08	2017-10-07
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2017-02-28	2018-02-27
Low Frequency Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2017-08-01	2018-07-31
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21
Low Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2017-08-22	2018-08-21

Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2016-10-08	2017-10-07
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	SHEM050-1	2017-01-14	2018-01-13
High-amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2017-01-14	2018-01-13
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM171000666401

Page: 9 of 31

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2017-03-03	2018-03-02
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-1~6	2017-08-18	2018-08-17
Digital Multimeter	FLUKE	17B	SHEM043-5	2017-08-14	2018-08-13
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	316	SHEM001-1	2017-01-29	2018-01-28

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	47 CFR Part 15, Subpart B:2016
Test Method:	ANSI C63.4
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	79dB(μV) quasi-peak, 66dB(μV) average
0.5M-30MHz	73dB(μV) quasi-peak, 60dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

Test mode: a: DC12V support monitoring : keep EUT monitoring by DC12V adapter support continual .

b: PoE support monitoring : keep EUT monitoring by PoE adapter support continual .

6.1.2 Test Setup Diagram

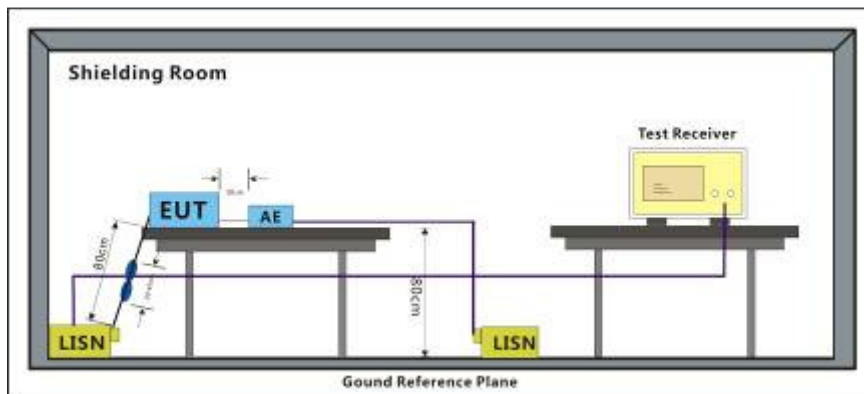


6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.



Mode:a; Line:Live Line

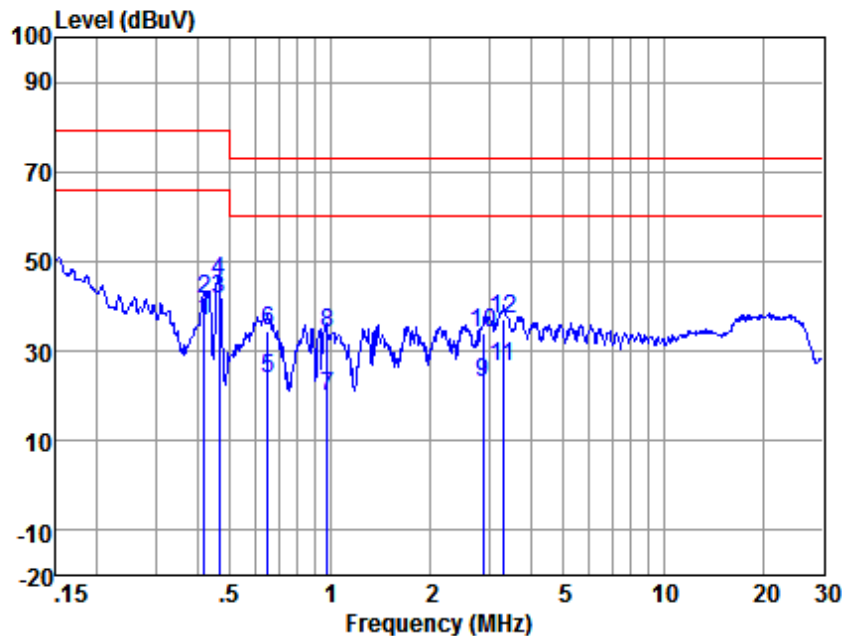


Site : chamber
Condition : LISN-L-2017
Project No: 5953IT
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.419	26.64	0.11	9.82	36.57	66.00	-29.43	Average
2	0.419	31.45	0.11	9.82	41.38	79.00	-37.62	QP
3	0.464	31.74	0.11	9.82	41.67	66.00	-24.33	Average
4	0.464	35.39	0.11	9.82	45.32	79.00	-33.68	QP
5	0.651	13.82	0.11	9.82	23.75	60.00	-36.25	Average
6	0.651	24.70	0.11	9.82	34.63	73.00	-38.37	QP
7	0.979	9.88	0.11	9.84	19.83	60.00	-40.17	Average
8	0.979	23.90	0.11	9.84	33.85	73.00	-39.15	QP
9	2.884	13.12	0.12	9.85	23.09	60.00	-36.91	Average
10	2.884	24.00	0.12	9.85	33.97	73.00	-39.03	QP
11	3.310	16.48	0.12	9.85	26.45	60.00	-33.55	Average
12	3.310	27.07	0.12	9.85	37.04	73.00	-35.96	QP



Mode:a; Line:Neutral Line

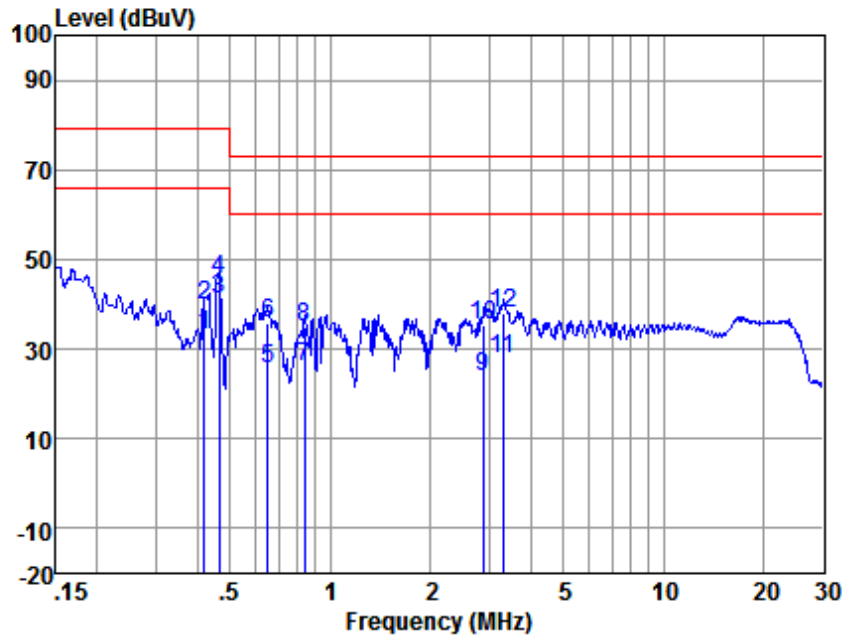


Site : chamber
Condition : LISN-N-2017
Project No: 5953IT
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.419	23.31	0.11	9.82	33.24	66.00	-32.76	Average
2	0.419	29.97	0.11	9.82	39.90	79.00	-39.10	QP
3	0.464	31.34	0.11	9.82	41.27	66.00	-24.73	Average
4	0.464	35.72	0.11	9.82	45.65	79.00	-33.35	QP
5	0.651	15.56	0.11	9.82	25.49	60.00	-34.51	Average
6	0.651	25.92	0.11	9.82	35.85	73.00	-37.15	QP
7	0.839	15.99	0.11	9.83	25.93	60.00	-34.07	Average
8	0.839	24.86	0.11	9.83	34.80	73.00	-38.20	QP
9	2.884	13.86	0.13	9.85	23.84	60.00	-36.16	Average
10	2.884	25.39	0.13	9.85	35.37	73.00	-37.63	QP
11	3.310	17.78	0.13	9.85	27.76	60.00	-32.24	Average
12	3.310	28.23	0.13	9.85	38.21	73.00	-34.79	QP



Mode:b; Line:Live Line

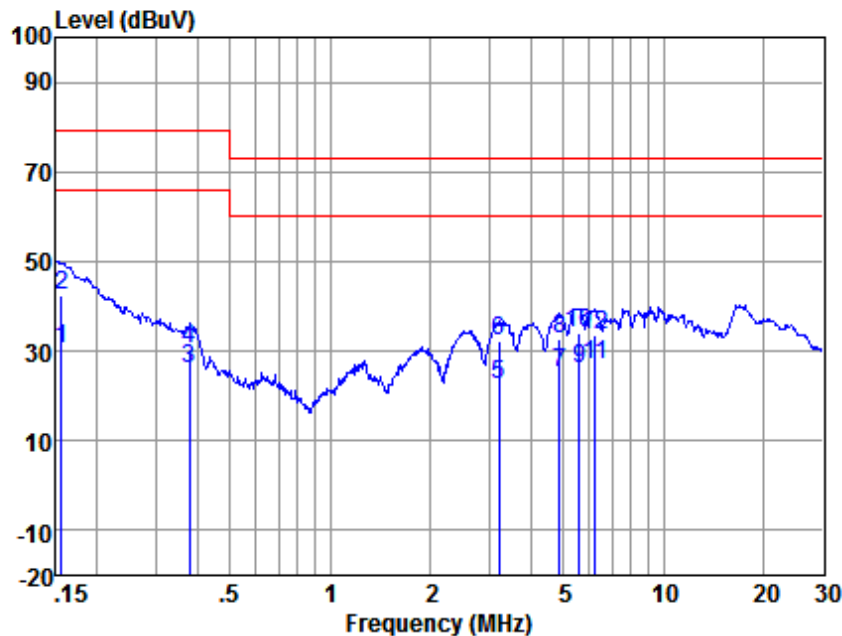


Site : chamber
Condition : LISN-L-2017
Project No: 5953IT
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.156	20.43	0.11	9.81	30.35	66.00	-35.65	Average
2	0.156	32.54	0.11	9.81	42.46	79.00	-36.54	QP
3	0.379	16.21	0.11	9.81	26.13	66.00	-39.87	Average
4	0.379	20.60	0.11	9.81	30.52	79.00	-48.48	QP
5	3.207	12.63	0.12	9.85	22.60	60.00	-37.40	Average
6	3.207	22.25	0.12	9.85	32.22	73.00	-40.78	QP
7	4.874	15.41	0.11	9.86	25.38	60.00	-34.62	Average
8	4.874	22.82	0.11	9.86	32.79	73.00	-40.21	QP
9	5.594	15.89	0.11	9.86	25.86	60.00	-34.14	Average
10	5.594	23.98	0.11	9.86	33.95	73.00	-39.05	QP
11	6.252	17.09	0.11	9.86	27.06	60.00	-32.94	Average
12	6.252	23.69	0.11	9.86	33.66	73.00	-39.34	QP



Mode:b; Line:Neutral Line

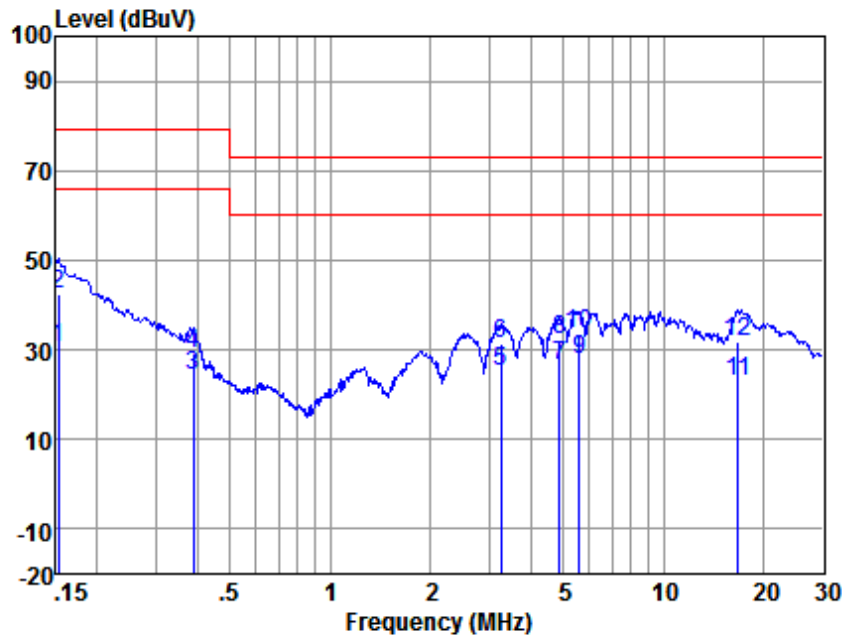

Site : chamber
Condition : LISN-N-2017
Project No: 5953IT
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.153	20.39	0.12	9.81	30.32	66.00	-35.68	Average
2	0.153	32.34	0.12	9.81	42.27	79.00	-36.73	QP
3	0.387	14.38	0.11	9.81	24.30	66.00	-41.70	Average
4	0.387	19.22	0.11	9.81	29.14	79.00	-49.86	QP
5	3.258	15.27	0.13	9.85	25.25	60.00	-34.75	Average
6	3.258	21.31	0.13	9.85	31.29	73.00	-41.71	QP
7	4.874	16.48	0.13	9.86	26.47	60.00	-33.53	Average
8	4.874	22.27	0.13	9.86	32.26	73.00	-40.74	QP
9	5.594	17.86	0.13	9.86	27.85	60.00	-32.15	Average
10	5.594	23.55	0.13	9.86	33.54	73.00	-39.46	QP
11	16.750	12.64	0.18	10.02	22.84	60.00	-37.16	Average
12	16.750	21.59	0.18	10.02	31.79	73.00	-41.21	QP

6.2 Radiated Emissions (30MHz-1GHz)


Test Requirement:	47 CFR Part 15, Subpart B:2016
Test Method:	ANSI C63.4
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz -88MHz	49.5(dBμV/m) quasi-peak
88MHz-216MHz	54.0(dBμV/m) quasi-peak
216MHz-960MHz	56.9(dBμV/m) quasi-peak
960MHz-1000MHz	60.0(dBμV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature:	20 °C	Humidity:	50 % RH	Atmospheric Pressure:	1001 mbar
Test mode:	a: DC12V support monitoring : keep EUT monitoring by DC12V adapter support continual . b: PoE support monitoring : keep EUT monitoring by PoE adapter support continual .				

6.2.2 Test Setup Diagram

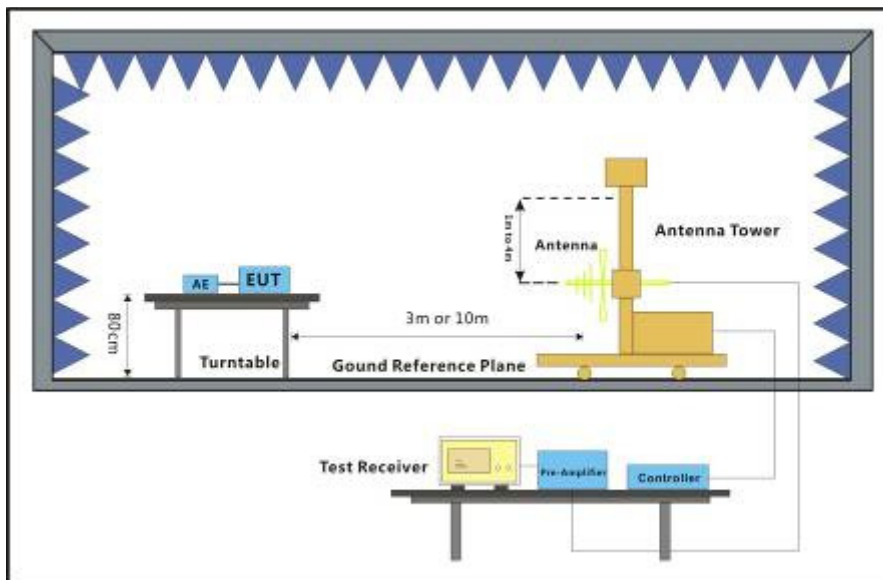


6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



Mode:a; Polarization:Horizontal

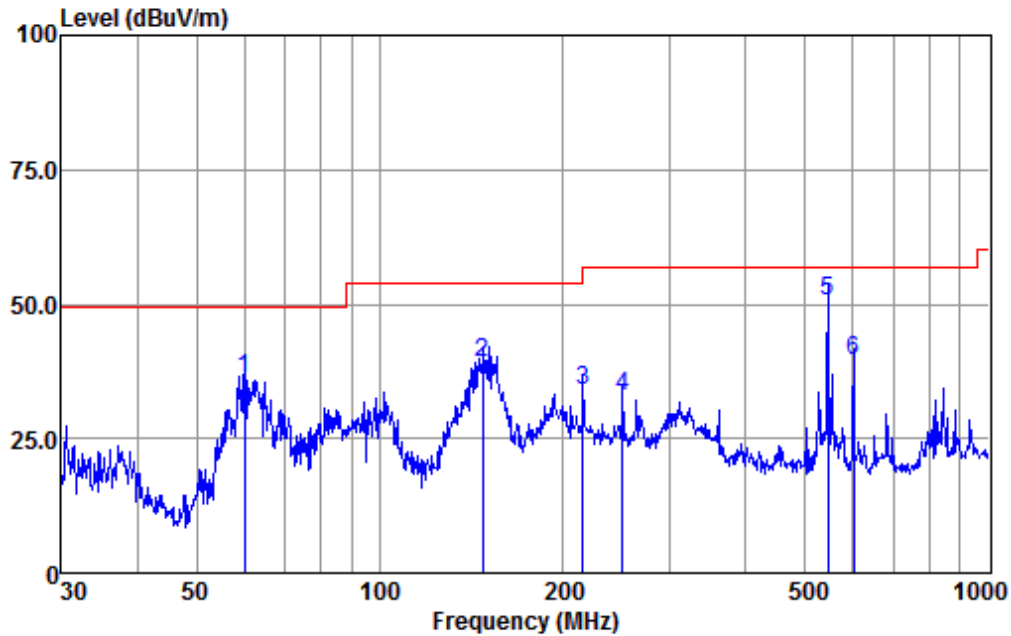


Condition : HORIZONTAL
EUT/Project: 5953IT
Test Mode : a

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	60.07	65.86	12.60	0.30	42.65	36.11	49.50	-13.39 QP
2	147.92	69.32	11.78	0.62	42.61	39.11	54.00	-14.89 QP
3	216.02	65.49	10.12	0.72	42.50	33.83	56.90	-23.07 QP
4	250.30	63.21	11.50	0.77	42.46	33.02	56.90	-23.88 QP
5 q	545.18	73.14	18.26	1.26	42.16	50.50	56.90	-6.40 QP
6	601.43	60.96	19.42	1.38	42.19	39.57	56.90	-17.33 QP



Mode:a; Polarization:Vertical

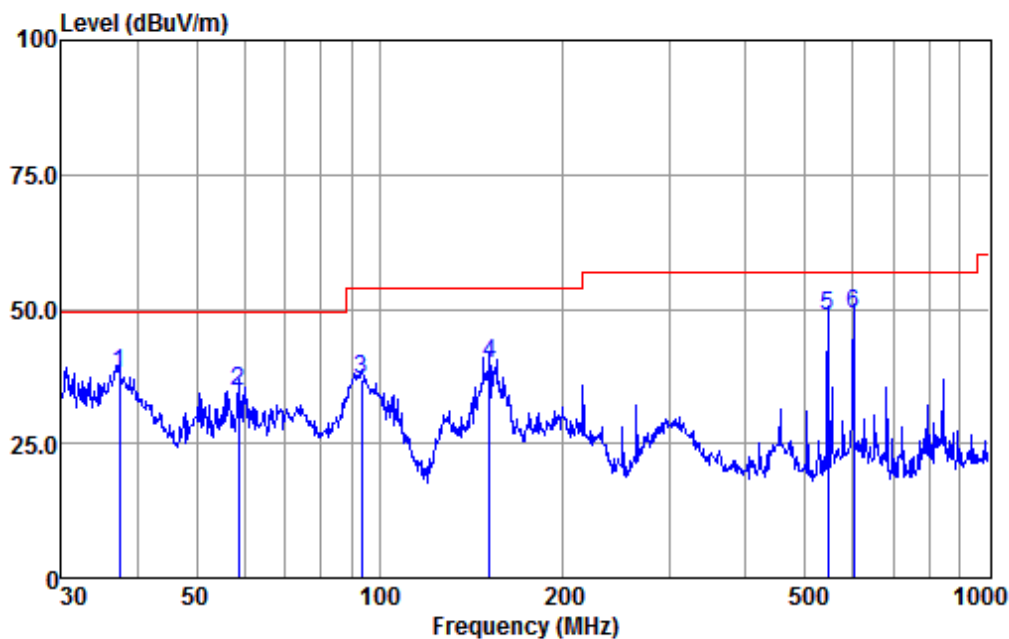

Condition : VERTICAL


EUT/Project: 5953IT

Test Mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	37.42	64.45	16.07	0.21	42.62	38.11	49.50	-11.39	QP
2	58.61	64.90	12.33	0.29	42.65	34.87	49.50	-14.63	QP
3	93.44	70.48	8.61	0.43	42.69	36.83	54.00	-17.17	QP
4	151.60	69.74	12.10	0.62	42.61	39.85	54.00	-14.15	QP
5	545.18	71.32	18.26	1.26	42.16	48.68	56.90	-8.22	QP
6 q	601.43	70.38	19.42	1.38	42.19	48.99	56.90	-7.91	QP



Mode:b; Polarization:Horizontal

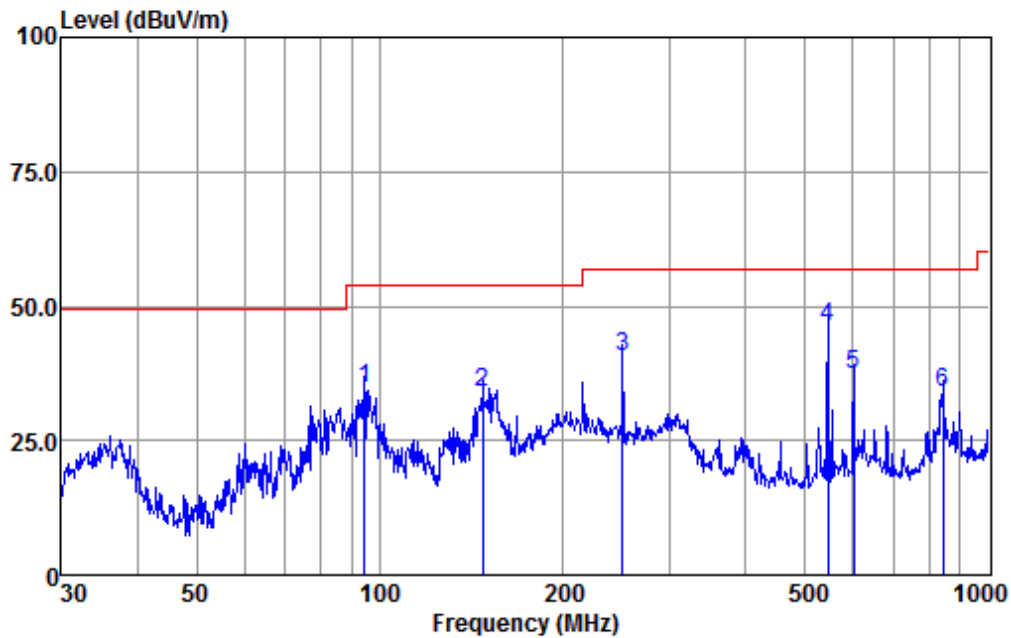


Condition : HORIZONTAL
EUT/Project: 5953IT
Test Mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	94.43	68.34	8.75	0.43	42.69	34.83	54.00	-19.17	QP
2	147.92	64.25	11.78	0.62	42.61	34.04	54.00	-19.96	QP
3	250.30	70.84	11.50	0.77	42.46	40.65	56.90	-16.25	QP
4 q	545.18	68.87	18.26	1.26	42.16	46.23	56.90	-10.67	QP
5	601.43	58.60	19.42	1.38	42.19	37.21	56.90	-19.69	QP
6	842.13	51.95	22.25	2.21	42.28	34.13	56.90	-22.77	QP



Mode:b; Polarization:Vertical

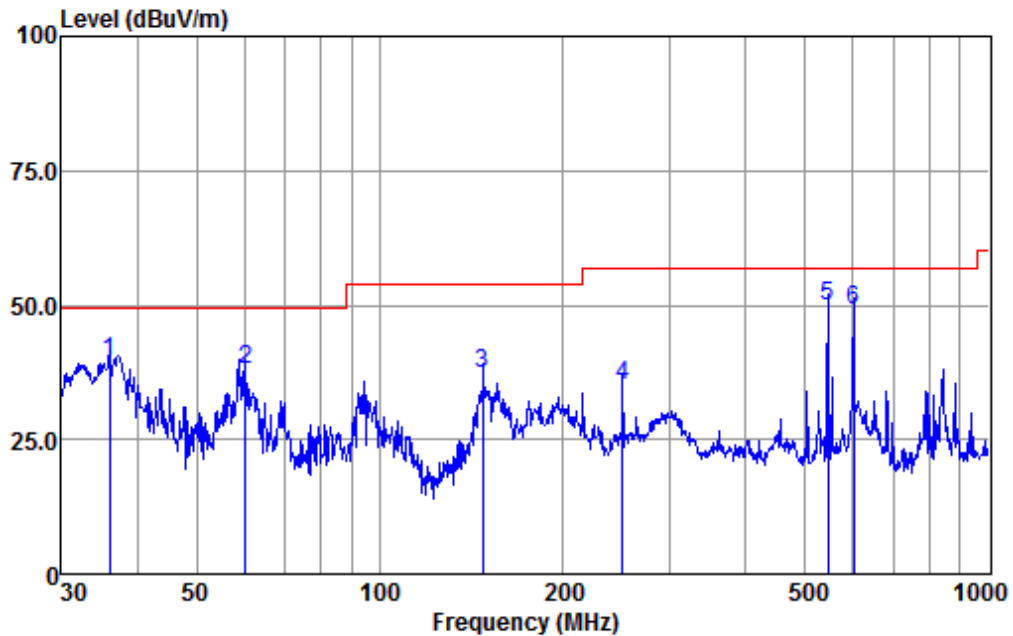

Condition : VERTICAL
EUT/Project: 5953IT
Test Mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	36.00	66.10	15.93	0.21	42.61	39.63	49.50	-9.87	QP
2	60.28	67.65	12.57	0.30	42.65	37.87	49.50	-11.63	QP
3	147.92	67.40	11.78	0.62	42.61	37.19	54.00	-16.81	QP
4	250.30	65.13	11.50	0.77	42.46	34.94	56.90	-21.96	QP
5 q	545.18	72.58	18.26	1.26	42.16	49.94	56.90	-6.96	QP
6	601.43	70.61	19.42	1.38	42.19	49.22	56.90	-7.68	QP

6.3 Radiated Emissions (above 1GHz)

Test Requirement:	47 CFR Part 15, Subpart B:2016
Test Method:	ANSI C63.4
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
Above 1GHz	80(dBμV/m) peak, 60(dBμV/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 18000MHz

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode:

- a: DC12V support monitoring : keep EUT monitoring by DC12V adapter support continual .
- b: PoE support monitoring : keep EUT monitoring by PoE adapter support continual .

6.3.2 Test Setup Diagram

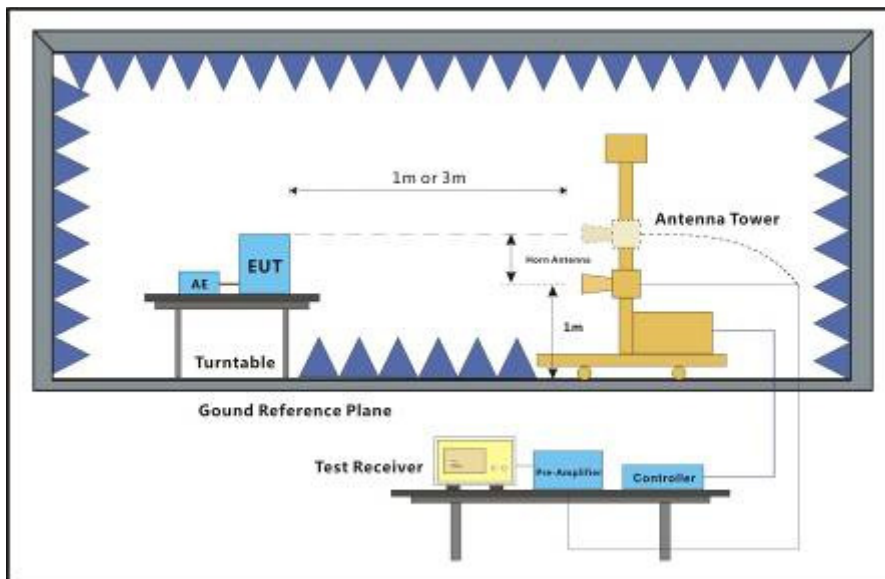


6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



Mode:a; Polarization:Horizontal

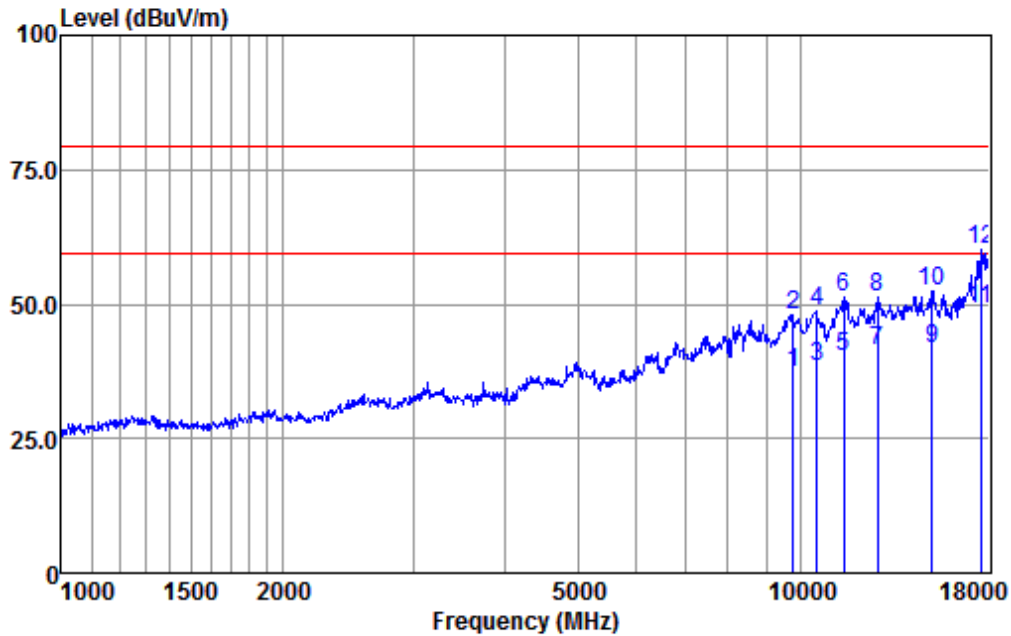


Condition : HORIZONTAL
EUT/Project: 5953IT
Test mode : a

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	9809.92	31.30	38.74	9.62	42.25	37.41	59.50	-22.09 Average
2	9809.92	41.86	38.74	9.62	42.25	47.97	79.50	-31.53 Peak
3	10545.01	31.16	39.77	9.63	42.10	38.46	59.50	-21.04 Average
4	10545.01	41.28	39.77	9.63	42.10	48.58	79.50	-30.92 Peak
5	11467.00	32.19	40.22	9.76	41.77	40.40	59.50	-19.10 Average
6	11467.00	42.95	40.22	9.76	41.77	51.16	79.50	-28.34 Peak
7	12761.30	34.07	38.93	10.05	41.89	41.16	59.50	-18.34 Average
8	12761.30	44.18	38.93	10.05	41.89	51.27	79.50	-28.23 Peak
9	15090.40	32.09	40.92	10.18	41.41	41.78	59.50	-17.72 Average
10	15090.40	42.85	40.92	10.18	41.41	52.54	79.50	-26.96 Peak
11	17588.56	34.07	44.58	11.93	41.38	49.20	59.50	-10.30 Average
12 p	17588.56	45.01	44.58	11.93	41.38	60.14	79.50	-19.36 Peak



Mode:a; Polarization:Vertical

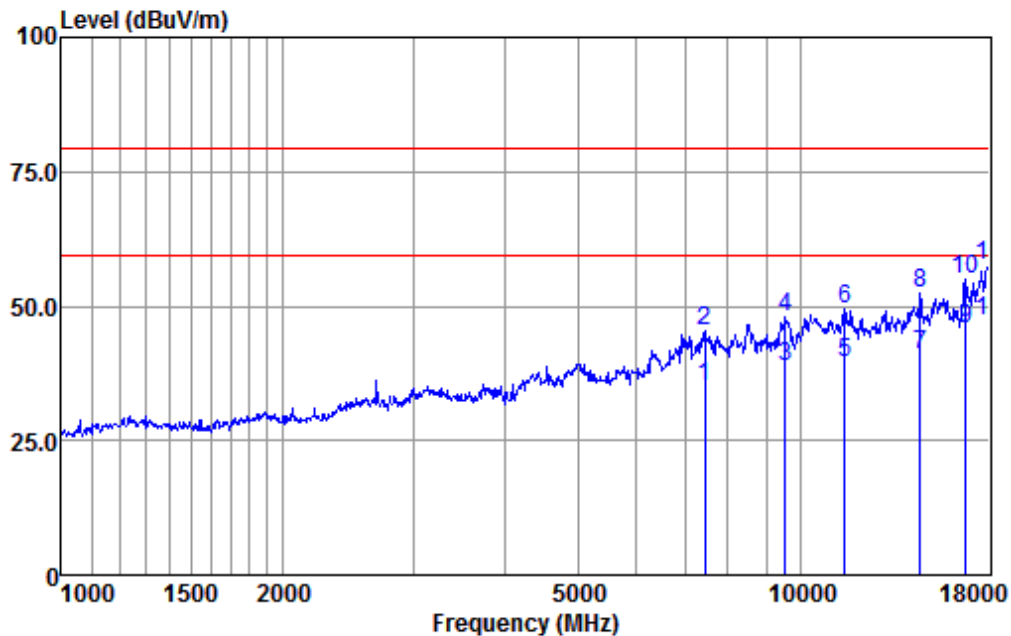


Condition : VERTICAL
EUT/Project: 5953IT
Test mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	7432.91	32.07	36.54	8.77	42.45	34.93	59.50	-24.57	Average
2	7432.91	42.36	36.54	8.77	42.45	45.22	79.50	-34.28	Peak
3	9558.02	32.97	38.54	9.62	42.31	38.82	59.50	-20.68	Average
4	9558.02	42.29	38.54	9.62	42.31	48.14	79.50	-31.36	Peak
5	11500.20	31.44	40.20	9.76	41.78	39.62	59.50	-19.88	Average
6	11500.20	41.11	40.20	9.76	41.78	49.29	79.50	-30.21	Peak
7	14575.97	30.32	41.80	10.26	41.35	41.03	59.50	-18.47	Average
8	14575.97	41.71	41.80	10.26	41.35	52.42	79.50	-27.08	Peak
9	16793.68	35.99	39.76	11.35	41.31	45.79	59.50	-13.71	Average
10	16793.68	45.08	39.76	11.35	41.31	54.88	79.50	-24.62	Peak
11	18000.00	25.42	50.90	12.83	41.86	47.29	59.50	-12.21	Average
12 p	18000.00	35.56	50.90	12.83	41.86	57.43	79.50	-22.07	Peak



Mode:b; Polarization:Horizontal

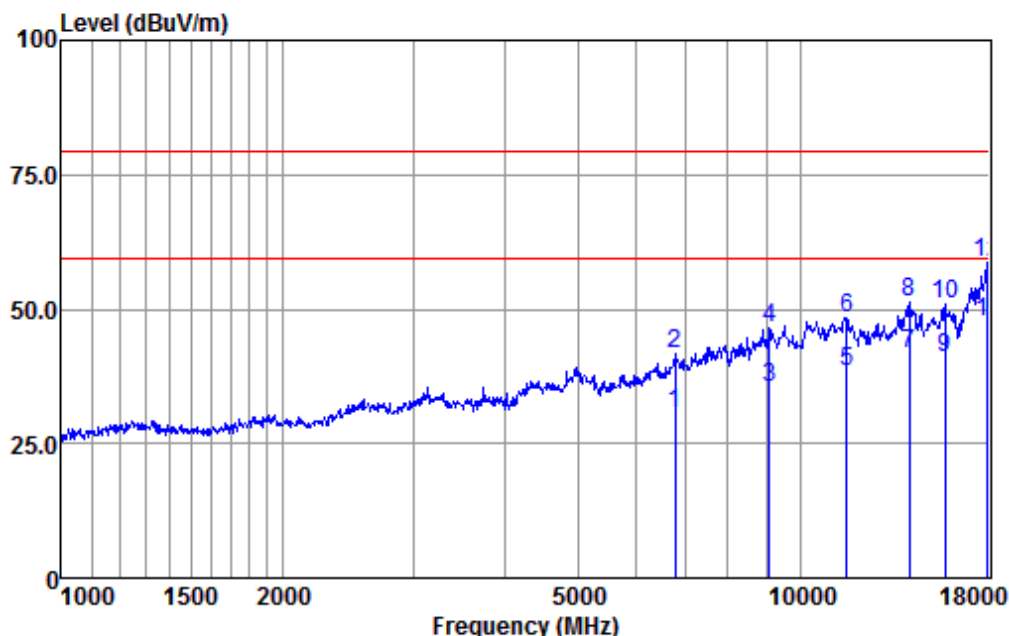

Condition : HORIZONTAL


EUT/Project: 5953IT

Test mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	6776.27	29.34	34.78	8.62	42.06	30.68	59.50	-28.82	Average
2	6776.27	40.47	34.78	8.62	42.06	41.81	79.50	-37.69	Peak
3	9099.72	30.66	37.55	9.61	42.43	35.39	59.50	-24.11	Average
4	9099.72	41.93	37.55	9.61	42.43	46.66	79.50	-32.84	Peak
5	11566.87	30.43	40.05	9.80	41.81	38.47	59.50	-21.03	Average
6	11566.87	40.19	40.05	9.80	41.81	48.23	79.50	-31.27	Peak
7	14079.08	31.64	41.23	10.31	41.64	41.54	59.50	-17.96	Average
8	14079.08	41.41	41.23	10.31	41.64	51.31	79.50	-28.19	Peak
9	15713.56	33.46	38.56	10.64	41.63	41.03	59.50	-18.47	Average
10	15713.56	43.31	38.56	10.64	41.63	50.88	79.50	-28.62	Peak
11	17948.05	26.58	50.11	12.83	41.80	47.72	59.50	-11.78	Average
12 p	17948.05	37.38	50.11	12.83	41.80	58.52	79.50	-20.98	Peak



Mode:b; Polarization:Vertical

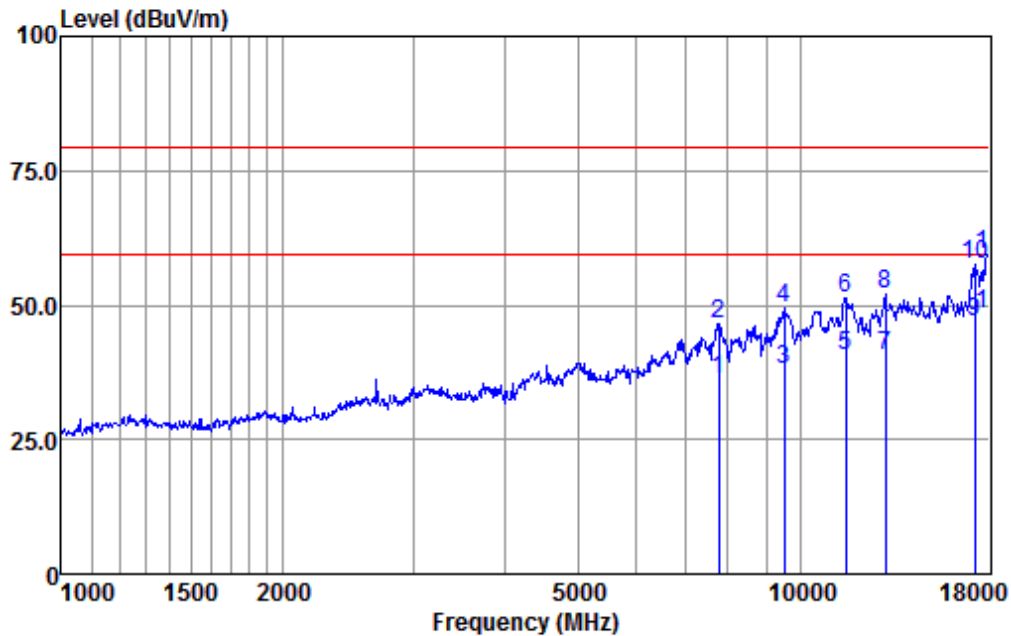

Condition : VERTICAL
EUT/Project: 5953IT
Test mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	7762.26	32.89	36.97	8.84	42.43	36.27	59.50	-23.23	Average
2	7762.26	43.12	36.97	8.84	42.43	46.50	79.50	-33.00	Peak
3	9530.43	32.09	38.52	9.62	42.32	37.91	59.50	-21.59	Average
4	9530.43	43.59	38.52	9.62	42.32	49.41	79.50	-30.09	Peak
5	11533.48	32.44	40.13	9.76	41.79	40.54	59.50	-18.96	Average
6	11533.48	43.37	40.13	9.76	41.79	51.47	79.50	-28.03	Peak
7	13059.82	33.05	39.42	10.14	41.87	40.74	59.50	-18.76	Average
8	13059.82	44.25	39.42	10.14	41.87	51.94	79.50	-27.56	Peak
9	17236.28	34.71	41.80	11.74	41.28	46.97	59.50	-12.53	Average
10	17236.28	45.35	41.80	11.74	41.28	57.61	79.50	-21.89	Peak
11	18000.00	26.42	50.90	12.83	41.86	48.29	59.50	-11.21	Average
12 p	18000.00	37.56	50.90	12.83	41.86	59.43	79.50	-20.07	Peak





7 Photographs



7.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



7.2 Radiated Emissions (30MHz-1GHz) Test Setup

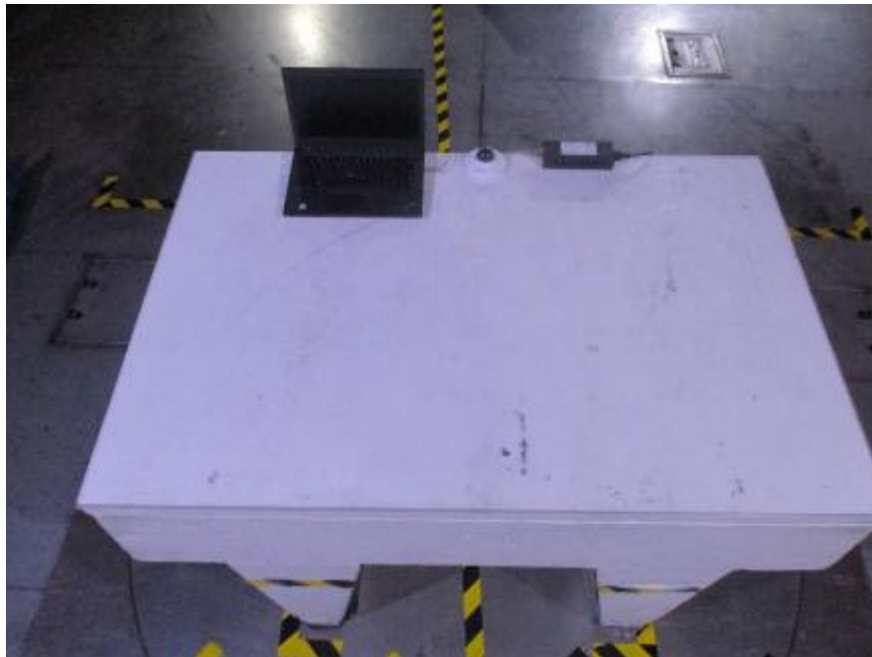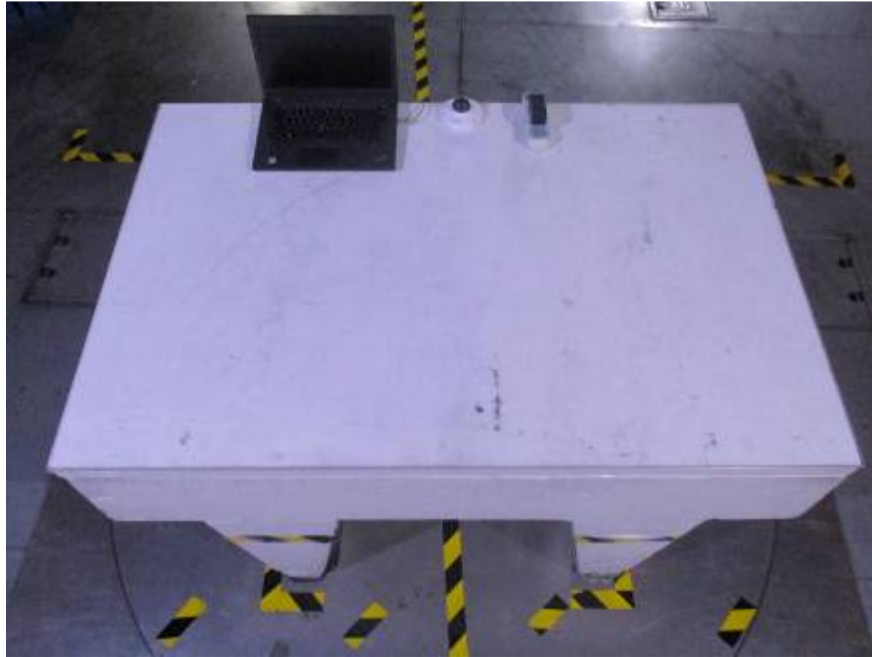

7.3 Radiated Emissions (above 1GHz) Test Setup

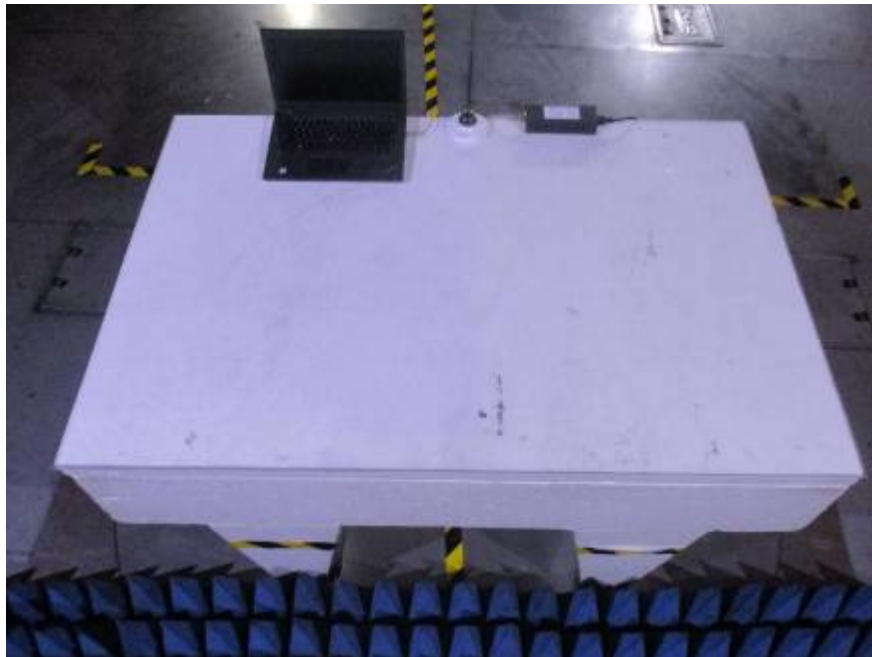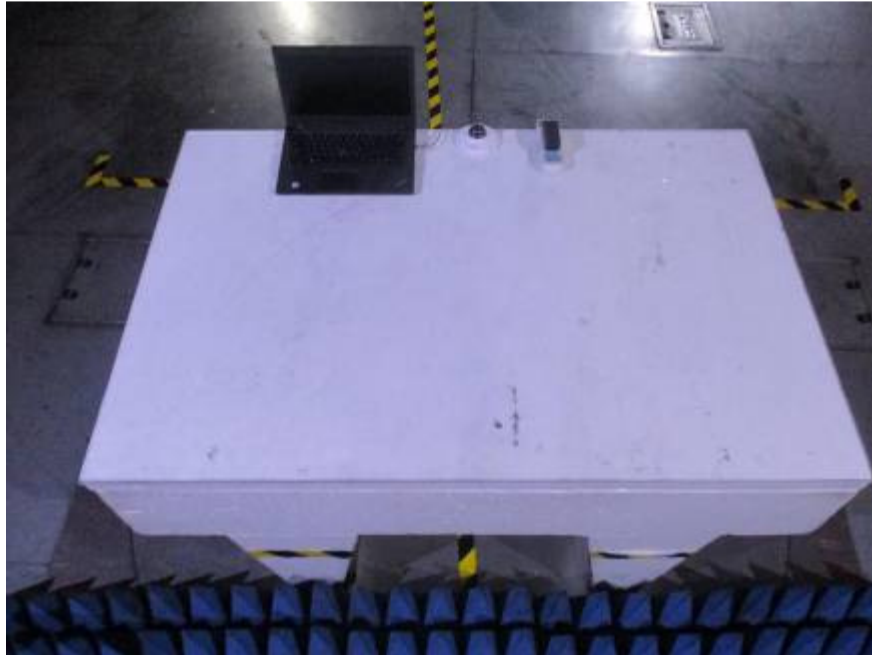

7.4 EUT Constructional Details









--End of the Report--