

## DH-IPC-K200/ 200A /200W

### 2Megapixel Full HD Cube Network Camera



### Features

- 1/3" 2Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- DWDR, Day/Night, 3DNR, Auto iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens
- White LEDs length 10m
- PIR sensor range 6m
- Micro SD memory (K200A only), PoE (K200/200A), Wi-Fi (K200W only)

# DH-IPC-K200/ 200A /200W

## Technical Specifications


Model	DH-IPC-K200	DH-IPC-K200A	DH-IPC-K200W
<b>Camera</b>			
Image Sensor	1/3" 2Megapixel progressive scan CMOS		
Effective Pixels	1920(H)x1080(V)		
Scanning System	Progressive		
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100000		
Min. Illumination	0.05lux/F1.8(color)		
S/N Ratio	More than 50dB		
Video Output	N/A		
<b>Camera Features</b>			
Max. LEDs Length	10m		
Day/Night	Auto(Electronic) / Color / B/W		
Backlight Compensation	BLC / HLC / DWDR		
White Balance	Auto/Manual		
Gain Control	Auto/Manual		
Noise Reduction	3D		
Privacy Masking	Up to 4 areas		
<b>Lens</b>			
Focal Length	3.6mm		
Max Aperture	F1.8		
Focus Control	Manual		
Angle of View	86.5°		
Lens Type	Fixed Lens		
Mount Type	Board-in Type		
<b>Video</b>			
Compression	H.264/MJPEG		
Resolution	1080P(1920x1080)/720P(1280x720)/D1/CIF		
Frame Rate	Main Stream	1080P/720P(1~25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate	H.264: 16K ~ 8192Kbps		
<b>Audio</b>			
Compression	N/A	G.711a / G.711u / PCM	
Interface	N/A	Built-in Mic, Built-in speaker	
<b>Network</b>			
Ethernet	RJ-45 (10/100Base-T)		
Wi-Fi	N/A	Wi-Fi(802.11b/g)	
Protocol	IPv4/IPv6, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour		
ONVIF	ONVIF Profile S		
Max. User Access	10 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		

## DH-IPC-K200/ 200A /200W

<b>Auxiliary Interface</b>			
Memory Slot	N/A	Micro SD, Max 64GB	N/A
RS485	N/A		
Alarm	N/A	1/1 channel In/Out	
PIR Sensor Range	Up to 6m		
<b>General</b>			
Power Supply	DC12V,PoE(802.3af)		DC12V
Power Consumption	<4W	<4.5W	<5W
Working Environment	-20°C~+60°C, Less than 95%RH		-20°C~+50°C, Less than 95%RH
Ingress Protection	N/A		
Vandal Resistance	N/A		
Dimensions(W×D×H)	66.6mm×99.5mm×131.2mm		
Weight	0.35Kg (0.4kg with bracket)		

## DH-IPC-K200/ 200A /200W

### Dimensions (mm)

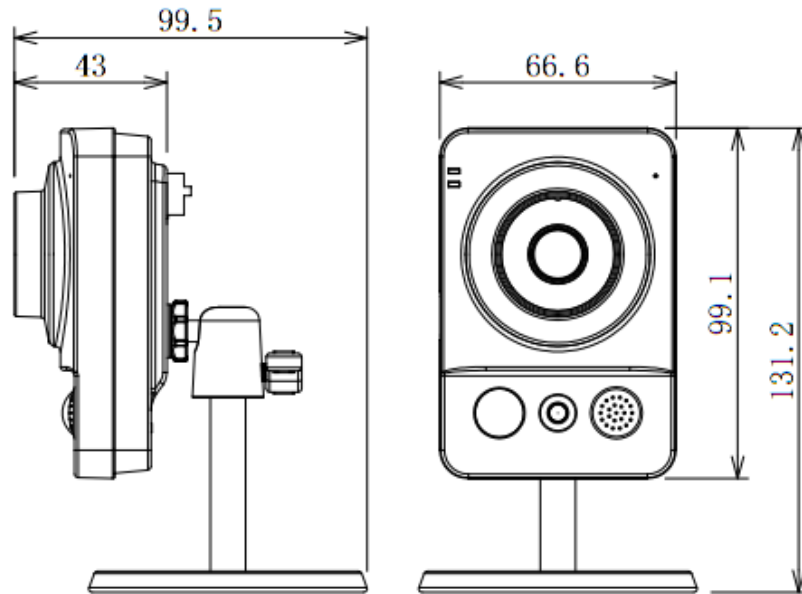

---

### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.