

Datasheet


RECEIVERS/ RX26-XPL - 2 relays receiver, LCD display

Product description

The RX26-XPL is a versatile receiver with the benefit of an integral backlit LDC.

General programming of the receiver (relay time etc) is completed using the 2 push buttons on the receiver. All programming steps are displayed on the backlit LCD screened menu.

The internal data can be backed up on an external memory device (MEM-XPL) to restore sites or copy to new receivers.

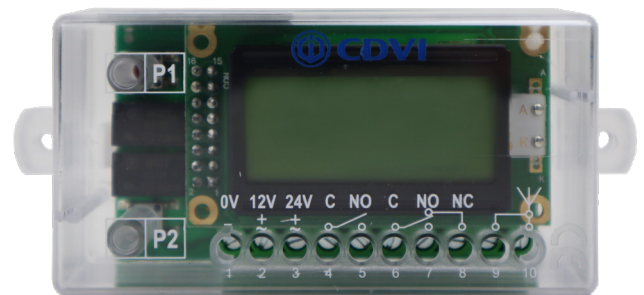


Key features

- LCD display receiver
- Up to 100 transmitter memory capacity
- Transparent housing
- 2 relays
- For internal use only

 *Certification*

 *DEEE*

RoHS *Certification*

 *-20°C to 70°C*

Product Information

Material: Polycarbonate housing

Frequency: 433.92MHz

Modulation: AM/ASK

Coding: Rolling Code Keeloq®

Relays:

Number of relays: 2, NO and NO/NC

Operating mode: Pulse, step, timed

Memory capacity: 100 transmitters,
85 buttons

Electrical specifications

Power supply: 12 to 24 Vac/dc

Max power on relay output: 24VA

Consumption: 25mA to 90mA (max)

