


DHI-ASC1208C-S

Eight Door One-Way Access Controller



- Support 100,000 valid cards & 150,000 records.
- Support card, password, fingerprint and combination.
- TCP/IP interface to PC.
- Wiegand or RS-485 interface to readers.
- Multiple verification methods (FP/PWD, only FP, only PWD).
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm.
- Anti-pass back, multi-door interlock, multi-card open.
- Support 128 efficient time and holiday schedules.
- Watch dog function ensure device free from halting.
- Surface mounted installation.
- Accumulator battery extension.

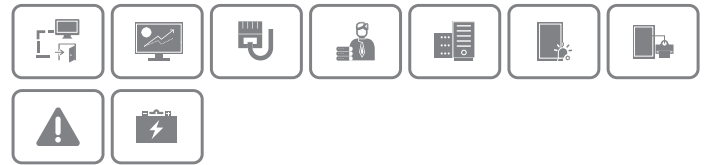

Technical Specification

System

| | |
|----------------|--------|
| Main Processor | 32 bit |
| Memory | 16M |

Input/Output Ports

| | |
|--------|--|
| Input | Inputs × 20 (Door sensor × 8, Exit button × 8, Alarm × 4) |
| Output | Relay × 12(door lock × 8, External alarm × 4) |
| Reader | Reader × 8 |

Capacity

| | |
|--------------|---------|
| Card holders | 100,000 |
| Events | 150,000 |

Function

| | |
|-----------------|---|
| Control Mode | Eight door one-way |
| Access control | Anti-pass back, Multi-interlock, Multi-card unlock |
| User Management | General, VIP, Guest, Patrol, Blocklist, Duress |
| Alarm Function | Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm |
| Period | Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period |

Interface

| | |
|-----------|----------------------|
| To PC | RJ45 (10/100M) |
| To Reader | Wiegand 26/34, RS485 |



General

| | |
|-----------------------|-------------------------|
| RTC | Yes |
| Power Supply | AC85-AC264, 50/60Hz |
| Operating Temperature | -30°C to +60°C |
| Working Humidity | ≤95% |
| Dimension(W × D × H) | 266 mm × 87 mm × 290 mm |
| Weight | 2kg |
| Working Environment | Indoor |

Certificates

| | |
|-----|-----|
| CE | Yes |
| FCC | Yes |

Dimensions (mm[inch])

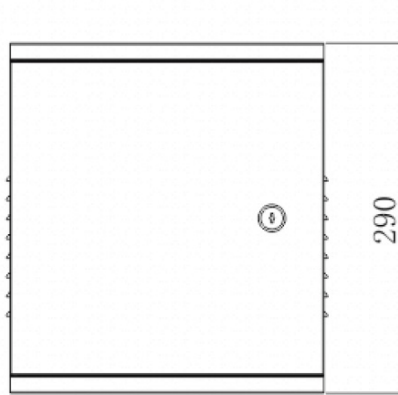

Application

Multi-door Management
Eight door two way controller

