

RF-9011-07-1

Wireless repeater 433 MHz

General

The wireless repeater receives and retransmits signals from 433 MHz Learn Mode sensors to increase the distance a wireless sensor can be mounted away from the control panel or wireless receiver and is therefore ideal for installations where wireless sensors are either beyond panel reception or cannot pass the sensor test.

In smart mode, up to 4 repeaters can be cascaded to further increase the wireless coverage of the wireless security system. Up to 16 repeaters can be used in one system.


Installation

The wireless repeater has a tamper protection for opening the enclosure as well as for removing the unit from the wall. Its compact design and the fact there are no visible antenna's makes it suitable to be installed in any interior.

The repeater is powered from the mains and includes a rechargeable lithium-ion backup battery.

Diagnostics

On the wireless repeater, a number of color LEDs indicate the radio strength signal (RSSI) allowing identifying the best location inside the premise where to install the wireless sensors. Other than the RSSI value, the LEDs can also visualize the noise floor level and the battery level of the backup battery which is included.

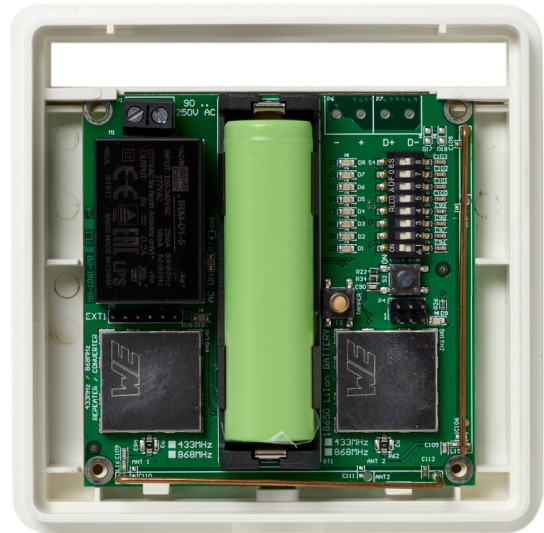

Details

- 433 MHz 63 bit or 433 MHz LoNa support selectable
- Compact size and modern design
- No external antennas
- Visualization of sensor RSSI, Noise Floor Level, Battery level
- Cover and pry-off tamper
- -8dB test function
- Lithium-ion rechargeable backup battery included
- Reports AC failure, low battery, tamper, RF supervisory, RF jamming
- EN50131 Grade 2, INCERT Grade 2

RF-9011-07-1

Wireless repeater 433 MHz

Especificaciones técnicas

General

Tipo de expansor Aislador / repetidor bus de datos

Copia de seguridad

Tipo de batería 3.6 V ; 3200 mAh lithium ; Li-ion battery (included)
Samsung INR18650-35E ; Panasonic NCR18650B

Eléctrico

Operating voltage 100 to 230 VAC

Consumo de corriente min. 11 mA
max 24.2 mA

Físico

Physical dimensions 102 x 102 x 33 mm

Peso neto 220 g

Color Blanco

Material Plástico ABS

Medioambiental

Operating temperature 0 to +40°C

Humedad relativa 80% noncondensing

Entorno Interior

Regulador

Certificación EN50131 Grado 2, INCERT

Wireless

Compatibilidad Smart Mode : xGenConnect, Advisor Advanced
Dumb Mode : ZeroWire

Supported wireless devices 433 MHz 63 bit sensors & keyfobs
433 MHz LoNa sensors and repeaters

Maximum number of sensors 64 or max number supported by panel

Maximum number of repeaters in daisy chain 4

Maximum number of repeaters in one system 16

Maximum power output 10 dBm



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 5 May 2023 - 10:36