


Analogue-addressable Fire Alarm Module

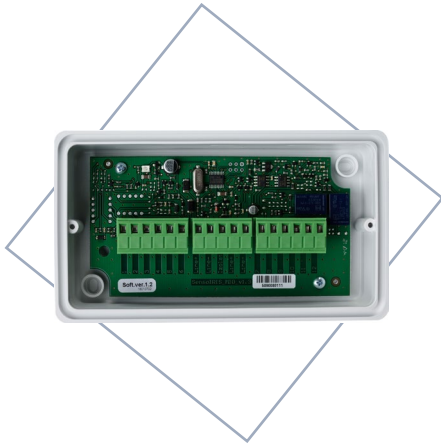

- IP 21 protection
- ABS plastic material
- White color

SensoIRIS MIO04 is an analogue-addressable module with 4 relay outputs. The module is designed for application in analogue-addressable fire alarm systems, supporting TTE communication protocol. The module controls 4 relay outputs and has built-in isolator module. SensoIRIS MIO04 is powered on from the fire panel and can be controlled via the communication protocol. The module is mounted in a separate small plastic box suitable for wall mounting with transparent cover for visual inspection.

Features

- IP 21 protection
- ABS plastic material
- White color
- Certified according EN54-18; 17:2005

Technical Specifications

Operating Voltage Range	16- 32VDC
Consumption, stand-by mode	175µA@27VDC
Nom. current consumption	200µA@27VDC
Outputs, electrical characteristics (max.)	DC 30V/1A; AC 125V/0.5A
Current consumption with 1 LED on	4mA
Wire Gauge for terminals	0.4mm ² - 2.0mm ²
Operating temperature	-35°C to +60°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Weight	~230g
Dimensions	142x80x45mm

Last update: 02/2025