

SensoMAG MCP50 IP67 Waterproof Manual Call Point

EN54-11
EN60529

Description

SensoMAG MCP50 IP67 is a manual call point designed to work in conventional fire alarm systems and especially for outdoor installation and IP67 environments. The call point has a resettable fragile (flexible) working element to ensure reliable and safe operation. A protective transparent cover is mounted for avoiding of fault or accidental activation. The declared protection is achieved using the supplied in the kit IP67 rated cable glands. The LED indication informs the user for fire and test events.





Technical and Environmental Specifications

Operating voltage	9 ÷ 30 VDC
Nominal operating voltage	24 VDC
Current consumption in alarm state	23mA/15V; 38mA/24V; 48mA/30V
Installation wires	2.5mm ²
Operation temperature	-10°C ÷ +60°C
Relative humidity.	≤93% @ +40°C
Type of the frangible element	A
Material (plastic), color	ABS, red
Degree of protection	IP67
Dimensions	114x114x80mm
Weight	262g

CE¹⁷
1293

DoP No: 061

1293-CPR-0539

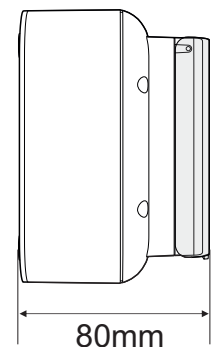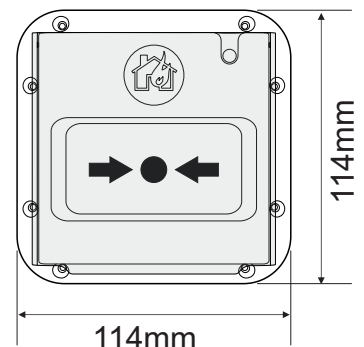

Packing Information

- **Packing box** - Kit of 1 unit SensoMAG MCP50 IP67, 1 unit special tool for test and reset, 8 mounting screws, 2 IP67 rated cable glands; dimensions 121x121x82mm
- **Carton box** - 40 kits of SensoMAG MCP50 IP67, dimensions 560x362x320 mm

Compatible Product Range


- **MAG2, MAG2P** - Conventional Fire Alarm Panel, 2 fixed zones
- **MAG4, MAG4P** - Conventional Fire Alarm Panel, 4 fixed zones
- **MAG8** - Conventional Fire Alarm Panel, 8 fixed zones
- **MAG8Plus** - Conventional Fire Alarm Panel, 8 fixed zones, expandable to 16

Contact Information:

SensoMAG MCP50 IP67 Waterproof Manual Call Point

EN54-11
EN60529

● Connection Diagrams

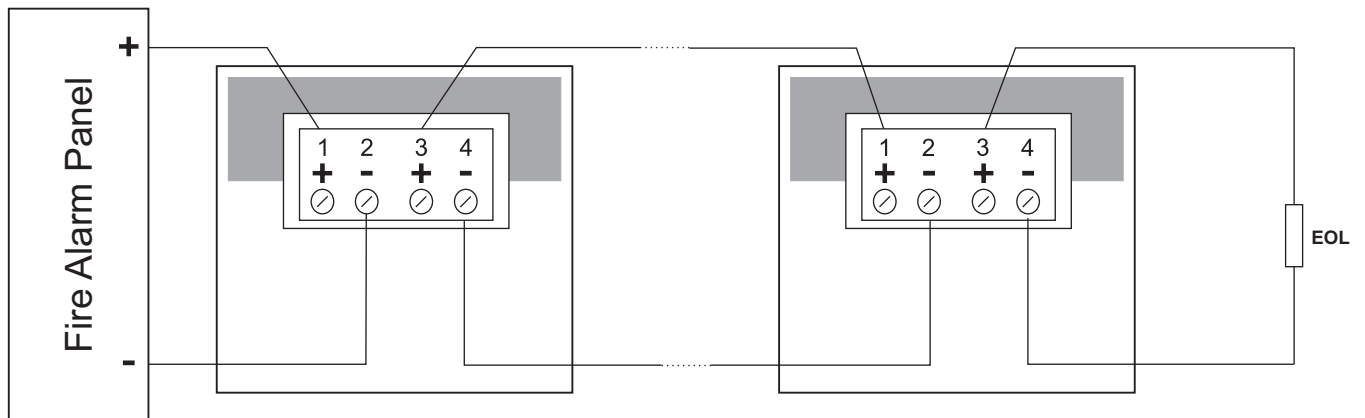

● Contact Information: