

16-Port/24-Port Gigabit PoE+ 4-Port Gigabit Combo(RJ-45/SFP) L2 Managed Ethernet Switch

Overview

The product of this series is 16-Port/24-Port Gigabit PoE+ 4-Port Gigabit Combo(RJ-45/SFP) L2 Managed Ethernet Switch.

This series switches provide 16/24 10/100/1000Mbps Ethernet RJ-45 ports, 4 100/1000Mbps combo(RJ-45/SFP) ports. It meets IEEE 802.3af/at standard. All downlink RJ-45 ports support Power-over-Ethernet(PoE+), which can deliver up to 30W power per port.

The switch has extensive L2 management functions, such as 802.1Q VLAN, ACL, LAG, loop detection and SNMP. It can be easily managed via a WEB GUI, or CLI (telnet/console). It is easy to use, Plug-and-Play, can be widely used in video security monitoring system, network project, etc.

This series contains two types:

- UTP3320TS-PSB-L2: 16-Port Gigabit PoE+ 4-Port Gigabit Combo (RJ-45/SFP) L2 Managed Ethernet Switch
- UTP3328TS-PSB-L2: 24-Port Gigabit PoE+ 4-Port Gigabit Combo(RJ-45/SFP) L2 Managed Ethernet Switch

Features and Highlights



Abundant Interfaces

- UTP3320TS-PSB-L2:
 - 16*10/100/1000 Base-T PoE+ RJ-45(Auto MDI/MDIX) ports
 - 4*100/1000Mbps Combo(RJ-45/SFP)
 - 1*RJ-45 Console
- UTP3328TS-PSB-L2:
 - 24*10/100/1000 Base-T PoE+ RJ-45(Auto MDI/MDIX) ports
 - 4*100/1000Mbps Combo(RJ-45/SFP)
 - 1*RJ-45 Console



UTP3320TS-PSB-L2



UTP3328TS-PSB-L2

Easy-to-use

- Plug-and-Play
- Manage via a WEB

Layer 2 Management Function

- 802.1Q VLAN
- ACL
- LAG
- IGMP Snooping
- SNMP

Specifications

Items	UTP3320TS-PSB-L2	UTP3328TS-PSB-L2
Hardware Specifications		
Downlink Port	16*10/100/1000 Base-T PoE+ RJ-45(Auto-MDI/MDI-X)	24*10/100/1000 Base-T PoE+ RJ-45(Auto-MDI/MDI-X)
Uplink Port	4*1000M Combo (RJ-45/SFP)	
Console port	1*RJ-45	
Led Indicators	1*PWR, power supply indicator	
	1*SYS, system working indicator	
	20*Link/Act, port state indicators	28*Link/Act, port state indicators
	16*PoE, port PoE state indicators	24*PoE, port PoE state indicators
Dimensions (W*D*H)	440mm*315mm*44mm	
Input Voltage	100~220V AC, 50/60Hz	
Power Consumption	≤310W (Full load including PoE)	≤450W (Full load including PoE)
Material	Metal shell	
Installation	Rack/desktop/wall mounted	
Switch Property		
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE802.3at	
Forwarding Modes	Store and Forward	
MAC Table	8k, support auto learning	
Switching Capacity	40Gbps/non-blocking	56Gbps/non-blocking
Packet Forwarding Rate	29.7Mpps	41.6Mpps
Jumbo Frame	9kB	
Power Supply		
PoE Standard	IEEE 802.3af/at	
PoE Power Supply Type	End-span	
PoE Pin Assignment	1/2(+), 3/6(-)	
PoE Budget	30W max for each port, 280W max for whole switch	30W max for each port, 425W max for whole switch
Reliability		
Operating	0℃~40℃, 10%~90% (Non-condensation)	
Storage	-40℃~70℃, 5%~90% (Non-condensation)	


Software Architecture

Items	UTP3320TS-PSB-L2, UTP3328TS-PSB-L2
VLAN	Port-based VLAN, 802.1Q-based VLAN, Protocol-based VLAN, MAC-based VLAN, Multicast-based VLAN
	Access mode, Trunk mode , Hybrid mode
	Max. 4094 VLAN
QinQ	Basic QinQ, Flexible QinQ
	Priority replication and mapping
	MAC address copy
	Layer 2 protocol transparent transmission
LACP	LACP mode, Manual mode
	Each link aggregation group has no less than 8 ports, No less than 8 link aggregation groups per switch
LLDP	Support LLDP
Spanning Tree	STP, RSTP, MSTP
Loopback	Port based, VLAN-based
PoE	Port PoE configuration
	PoE scheduled management
	PD-alive
Storm control	Broadcast storm control, Multicast Storm Control, Unknown unicast storm control
QoS	Inbound speed limit, Outbound speed limit
	Speed limit based on access control
	CoS-to-DSCP, DSCP-to-CoS, PQ, WRR, SP + WRR
ACL	MAC-based ACL, IPV4-based ACL, IPV6-based ACL, Protocol-based ACL
Security feature	IP + port, MAC + port, IP + MAC, IP + MAC + port, IP + VLAN, MAC + VLAN, IP + MAC + VLAN, IP + MAC + VLAN + port
	Port maximum MAC address learning control
	DHCP snooping
	IP source guard
Port Isolation	Support port isolation
Port Mirroring	One-to-one mirroring
	Many-to-one mirroring
IGMP Snooping	IGMP snooping V1, V2, V3
Static Routing	Multiple interface VLANs
	IPV4 static routing
IP Protocol	IPV4, IPV6
	SNMP
	Syslog
	Telnet, ssh, http, https
	DHCP server, DHCP client
	AAA
	Radius
TACACS+	


Appearances and Dimensions

UTP3320TS-PSB-L2

Dimensions(mm)

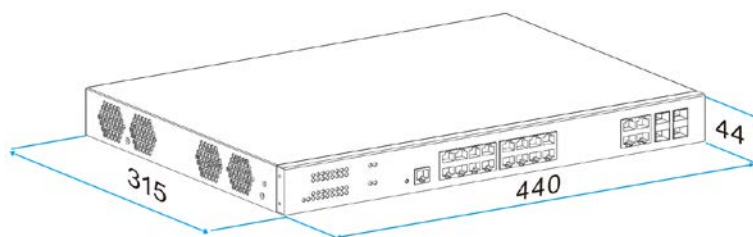

Front panel

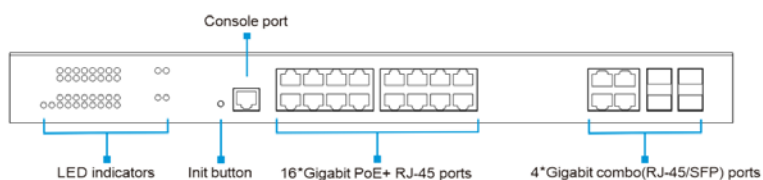


Rear panel




UTP3328TS-PSB-L2

Dimensions(mm)

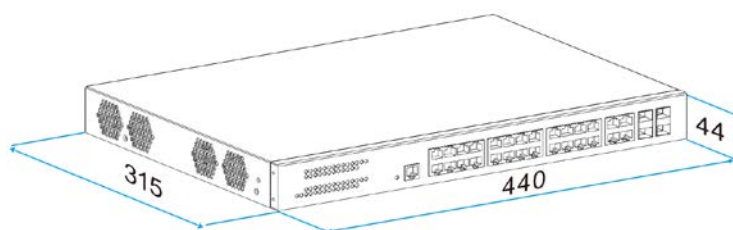

Front panel

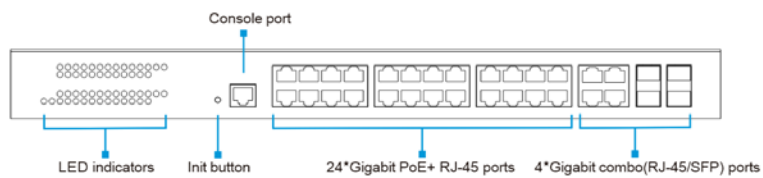

Rear panel



More Information

For more information, please visit:

www.utepo.net

SHENZHEN UTEPO TECH LTD.

Head quarter: 5F, Building B, Tiange Science and Technology Park, NO.2, Luozu Industrial Avenue, Shi'yan Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-83898016-863 or +86-1501-2669-765 (Sales)

Email: info@utepo.net (Sales), support@utepo.net (Technical support)

©2022 SHENZHEN UTEPO TECH LTD. All Rights Reserved.

Version,V1.0, updated 2022.5.5.

The information in this document is subject to change without notice.

Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.