

# VTH5221D/DW-S2

## Wi-Fi Indoor Monitor



### Features

- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 8ch wireless alarm integration (Only support 433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



### Technical Specification

Model	VTH5221D/DW-S2
-------	----------------

#### System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

#### Video

Video Compression	H.264
-------------------	-------

#### Audio

Audio Compression	G.711
-------------------	-------

Audio Input	All-direction Microphone
-------------	--------------------------

Audio Output	Built-in Loudspeaker
--------------	----------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

#### Display

LCD Screen	7" 1024x600
------------	-------------

#### Operation Mode

Input	Touch buttons and capacitive screen
-------	-------------------------------------

#### Interface

Wired Zones	6 on-board zones
-------------	------------------

Wireless Zones	8 wireless zones
----------------	------------------

Alarm Out	1
-----------	---

RS485	1
-------	---

### Network

Wi-Fi	IEEE802.11b/g/n
-------	-----------------

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------

### General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation	Surface
--------------	---------

Power	DC 12V, PoE (802.3af)
-------	-----------------------

Power Consumption	Work ≤7W
-------------------	----------


Working Temperature	-10°C to +55°C
---------------------	----------------

Relative Humidity	10%RH-90%RH
-------------------	-------------

Dimensions	215.0mm×140.0mm×21.0mm
------------	------------------------

Weight	0.8kg
--------	-------

## Dimensions

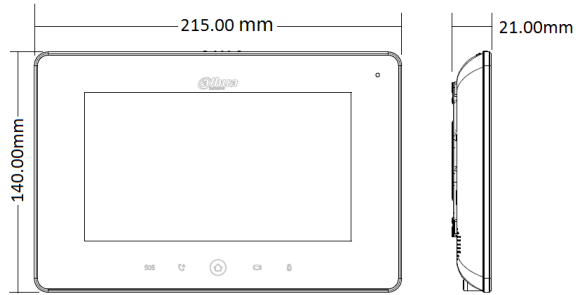

## Application

