




Configuración de cámara IP Lenx

1. Inicialización
2. Preguntas de seguridad
3. Cambio de parámetros de red
4. Añadir y activar usuario ONVIF

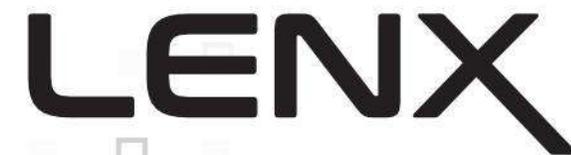

LENX

The Lenx logo is displayed in a bold, black, sans-serif font. It is accompanied by several thin, black, geometric lines that intersect and extend from the letters, creating a modern, stylized look.



IP POR DEFECTO 192.168.1.64
USAR SOLO INTERNET EXPLORER O COMPLEMENTO IETAB

LENX

Introducir una contraseña según los criterios

http://192.168.1.64/doc/page/login.asp?_1714118923972

The screenshot shows a web browser window with a dark background. In the foreground, there is a white dialog box titled "Activation" with a red header. The dialog box contains the following fields and text:

User Name	admin
Password	<input type="password"/> ✘ The item cannot be empty.
8 to 16 characters allowed, including upper-case letters, lower-case letters, digits and special characters (A-Za-z0-9!@#\$%^&*+,-./:;<=>?@[\\]^_`{ }~ space). At least two of above mentioned types are required.	
Confirm	<input type="password"/> ✘ The item cannot be empty.
<input type="button" value="OK"/>	

In the background, a login form is visible with fields for "User Name" (containing "admin"), "Password", and "Confirm Password", a "Forgot password?" link, and a "Login" button.



Preguntas de seguridad

The logo for LENX, featuring the word 'LENX' in a bold, black, sans-serif font. To the right of the text are several thin, black, diagonal lines of varying lengths, creating a stylized graphic element.

The image shows a screenshot of a web interface with a modal dialog box open. The dialog box is titled 'Security Question Configuration' and contains three rows of configuration options. Each row has a label, a dropdown menu, and an input field. The background shows a blurred login form with fields for 'admin' and a password, and a 'Login' button.

Security Question Configuration	
Security Question1	Your father's name? ▼
Answer	<input type="text"/>
Security Question2	Your mother's name? ▼
Answer	<input type="text"/>
Security Question3	Your head teacher's name in senior high school ▼
Answer	<input type="text"/>

Buttons: OK, Cancel



Address: <http://192.168.1.64/doc/page/preview.asp>

LENX


Live View

Playback

Picture

Configuration

04-26-2024 Fri 16:10:29

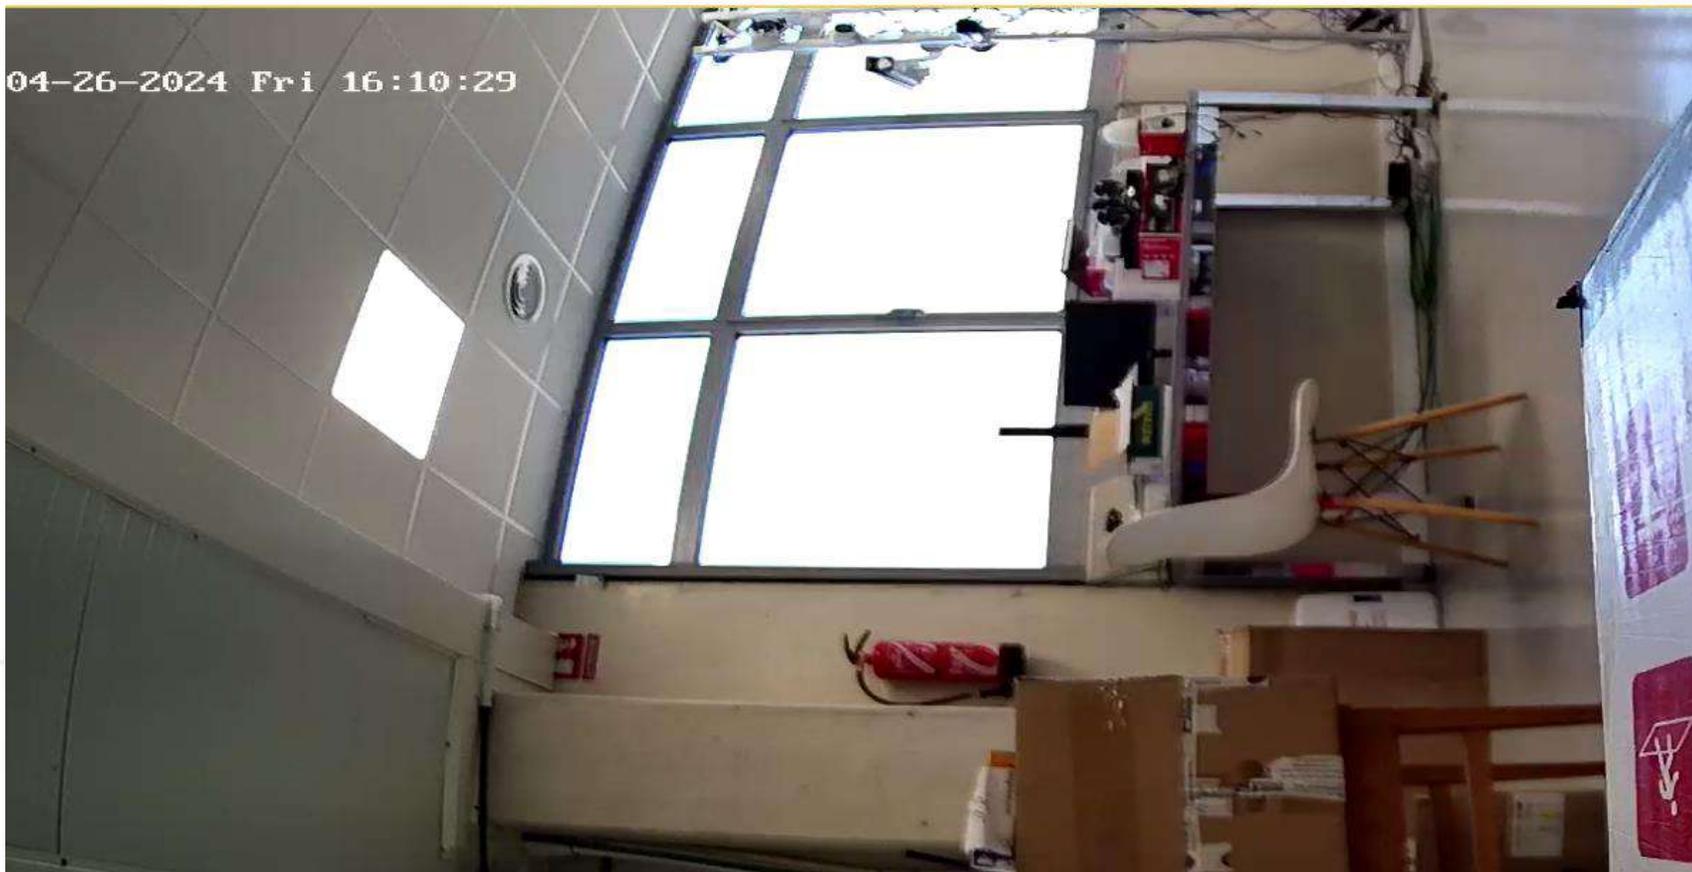

LENX



AGUSTES PARAMETROS DE RED



LENX

Live View Playback Picture **Configuration**

Local
System
Network
Basic Settings
Advanced Settings
Video/Audio
Image
Event
Storage

TCP/IP DDNS Port NAT

NIC Type: Auto

DHCP

IPv4 Address: 192.168.15.64 Test

IPv4 Subnet Mask: 255.255.255.0

IPv4 Default Gateway: 192.168.15.1

IPv6 Mode: Route Advertisement View Route Advertisement

IPv6 Address: [Greyed out]

IPv6 Subnet Mask: [Greyed out]

IPv6 Default Gateway: ::

Mac Address: 98:df:82:57:e4:d7

MTU: 1500

Multicast Address: [Empty]

Enable Multicast Discovery

DNS Server

Preferred DNS Server: 8.8.8.8

Alternate DNS Server: [Empty]

Save

Creación de usuario ONVIF



Address: <http://192.168.15.64/doc/page/config.asp>

LENX Live View Playback Picture **Configuration**

FTP Email Platform Access HTTPS QoS 802.1x **Integration Protocol** Network Service HTTP Listening

Enable ONVIF
ONVIF Version: 18.12

Advanced Settings

User List [Add] [Modify] [Delete]


No.	User Name	Level
1	admin	Administrator

[Save]





LENX

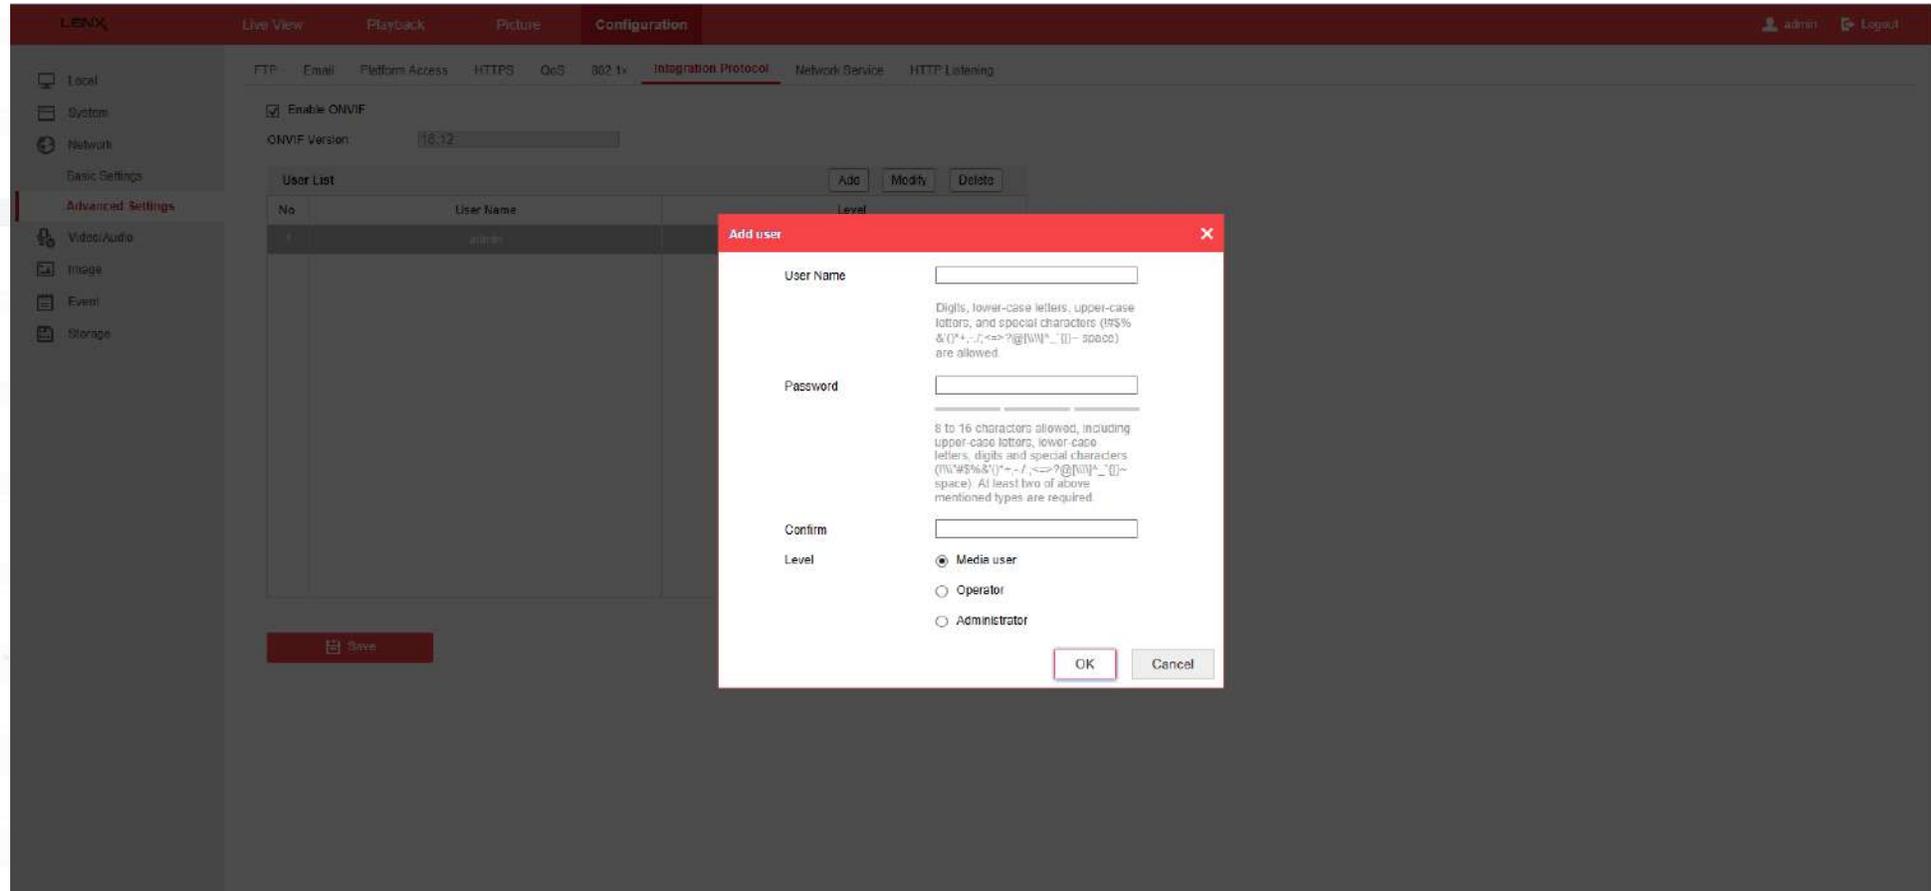

The image shows a screenshot of the LENX web management interface. The top navigation bar includes 'Live View', 'Playback', 'Picture', and 'Configuration'. The 'Configuration' section is active, showing various protocol settings like FTP, Email, Platform Access, HTTPS, QoS, 802.1x, Integration Protocol, Network Service, and HTTP Listening. A 'User List' table is visible with columns for 'No.', 'User Name', and 'Level'. A 'Save' button is located at the bottom of the configuration area.

An 'Add user' dialog box is open in the foreground, containing the following fields and options:

- User Name:** A text input field with a note: "Digits, lower-case letters, upper-case letters, and special characters (?!\$% &()*+,-./:;<=>@[\\]^_`{|}~ space) are allowed."
- Password:** A text input field with a note: "8 to 16 characters allowed, including upper-case letters, lower-case letters, digits and special characters (?!\$%&*+,-./:;<=>@[\\]^_`{|}~ space). At least two of above mentioned types are required."
- Confirm:** A text input field for password confirmation.
- Level:** A radio button selection with three options:
 - Media user
 - Operator
 - Administrator

Buttons for 'OK' and 'Cancel' are located at the bottom right of the dialog box.