

MAG8 Conventional Fire Alarm Panel

EN54-2/4

Description

MAG8 is a conventional fire alarm panel certificated by EN54-2/4, providing 8 fixed zones. Up to 20 (32 SensoMAG Series) fire detectors can be connected to every fire zone. Unlimited number of call points can be connected to every of the fire zones.

MAG8 is situated in a plastic box. The panel is easy for installation and maintenance and provides user-friendly daily operation.

The panel is suitable for residential, small and middle office applications with protected area up to 3000m².

The panel is available in different language versions for the front panel.




CE 17
1293

DoP No: 074

1293-CPR-0542

Technical and Environmental Specifications

Main Power Supply	~230VAC ± 10%
Frequency	50/ 60Hz
Back-up Power Supply	1 battery, 12V/ 7Ah
Power availability	0.7A
Main power supply fail consumption.	125mA
Outputs (<i>sounder circuits on the control PCB module</i>)	2; 24V/ 0.5A fuse
Output, FAULT Relay	1; 3A@24VDC
Output, FIRE Relay	1; 3A@24VDC
Auxiliary output	24VDC/ 0.3A fuse
Fixed zones	8
Detectors per zone / max. number of detectors	32/ 256
Multi language front panels.	YES
Operating temperature	0°C to +40°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Weight (without battery)	~2.4kg
Dimensions of plastic box	340x290x100mm

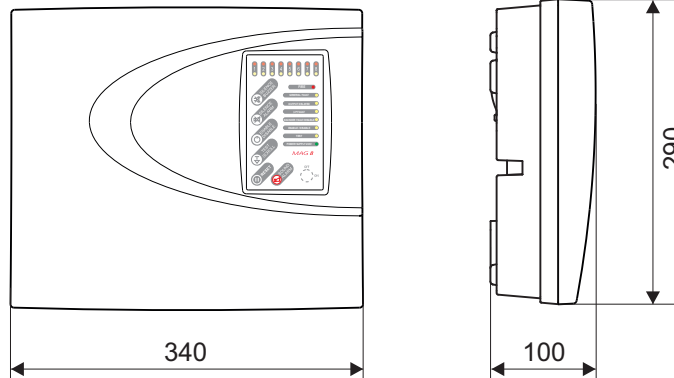

Contact Information:

MAG8 Conventional Fire Alarm Panel

EN54-2/4

Compatible Product Range

- **SensoMAG Series** - Conventional detectors
- **SF Series** - Conventional sounders
- **SF100 Series** - Conventional sounders
- **ML** - LOG module for recording and viewing event
- **MR8** - 8 relay expander module

Packing Information

- **Single packing box** - 1 unit MAG8 Fire Alarm Panel, dimensions 342x295x103mm
- **Carton packing box** - 5 units MAG8 Fire Alarm Panel, dimensions 560x362x320mm

Available Languages

- **English**
- **German**
- **Portugal**
- **Estonian**
- **Lithuanian**
- **Italian**
- **Dutch**
- **French**
- **Romanian**
- **Bulgarian**
- **Turkish**
- **Spanish**
- **Latvian**

Contact Information: