



## SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Telephone: +86 (0) 21 6191 5666

Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM170700444101

Page: 1 of 86

# TEST REPORT

**Application No.:** SHEM1707004441IT  
**Applicant:** Zhejiang Dahua Vision Technology Co., Ltd.  
**Address of Applicant:** No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China  
**Manufacturer:** Zhejiang Dahua Vision Technology Co., Ltd.  
**Address of Manufacturer:** No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China  
**Factory:** 1, ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.  
2, ZHEJIANG DAHUA ZHILIAN CO.,LTD.  
**Address of Factory:** 1, No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China  
2, No.28, Dongqiao Road, Dongzhou Street, Fuyang District, Hangzhou, P.R. China.  
**Equipment Under Test (EUT):**  
**EUT Name:** IP CAMERA  
**Model No.:** Refer to page 2  
α Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Standards:** EN 55032:2015(Class A), EN 61000-3-2:2014  
EN 61000-3-3:2013, EN 55024:2010 +A1:2015  
EN 50130-4:2011 +A1:2014  
**Date of Receipt:** 2017-07-07  
**Date of Test:** 2017-07-10 to 2017-08-09  
**Date of Issue:** 2017-08-14

<b>Test Result :</b>	<b>Pass*</b>
----------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.



Parlam Zhan  
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 2 of 86

### Model No.:

DH-IPC-HUM8231P-E2, IPC-HUM8231-L3, IPC-HUM8231-L1, DH-IPC-HUM8231N-E2,  
IPC-HUM8231P-E2, IPC-HUM8231N-E2, DH-IPC-HUM8231P-E1, DH-IPC-HUM8231N-E1,  
IPC-HUM8231P-E1, IPC-HUM8231N-E1, DH-IPC-HUM8431P-E1, DH-IPC-HUM8431N-E1,  
IPC-HUM8431P-E1, IPC-HUM8431N-E1, IPC-HUM8231-L3-0280B, IPC-HUM8431-L3-0280B,  
IPC-HUM8431-L3, IPC-HUM8231-L1-0280B, IPC-HUM8431-L1-0280B, IPC-HUM8431-L1





# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 3 of 86

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	2017-08-14	/	Original

Authorized for issue by:			
Tested By	 Bruce_tang /Project Engineer	2017-08-09 Date	
Checked By	 Zenger_zhang /Reviewer	2017-08-09 Date	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## 2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Asymmetric Mode Conducted Emissions (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Radiated Emissions (30MHz-1GHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015	EN 55032:2015	Class A	Pass
Harmonic Current Emission	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	N/A
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	Pass

N/A: Please refer to Section 6.5 of this report for details.



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 5 of 86

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 55024:2010 +A1:2015	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz)	EN 55024:2010 +A1:2015	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m, 80%, 1kHz Amp. Mod.	Pass
Electrical Fast Transients/Burst at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	2kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-4:2012	0.5kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Surge at Power Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014	1.2/50µs Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Surge at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td 0.5,1kV Line to Line 0.5,1,2kV Line to Ground	Pass
Surge at Signal Port	EN 55024:2010 +A1:2015	EN 61000-4-5:2014	1.2/50µs Tr/Td 1kV Line to Ground	Pass
Surge at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td 0.5,1kV Line to Ground	Pass
Conducted Immunity at Power Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-80MHz)	EN 55024:2010 +A1:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Immunity Part				
Item	Standard	Method	Requirement	Result
Voltage Dips and Interruptions	EN 55024:2010 +A1:2015	EN 61000-4-11:2004	0 % UT for 0.5per 0 % UT for 250per 70 % UT for 25per UT is Supply Voltage	Pass
Voltage Dips and Interruptions	EN 50130-4:2011 +A1:2014	EN 61000-4-11:2004	80 % UT for 250per 70 % UT for 25per 40 % UT for 10per 0 % UT for 250per UT is Supply Voltage	Pass
Mains Supply Voltage Variations- Conditioning	EN 50130-4:2011 +A1:2014	EN 50130- 4:2011+A1:2014	Unom+10% Unom-15%	Pass
Radiated Immunity(80MHz- 2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass
Conducted Immunity at Power Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf),80%,1kHz sinusoidal Amp. Mod.	Pass
Conducted Immunity at Signal Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf),80%,1kHz sinusoidal Amp. Mod.	Pass

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less

#### Declaration of EUT Family Grouping:

There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DH-IPC-HUM8231P-E2, IPC-HUM8231-L3, IPC-HUM8231-L1 was tested since their differences are pixels and sales area and appearance.



### 3 Contents

	Page
1 COVER PAGE .....	1
2 TEST SUMMARY .....	4
3 CONTENTS .....	7
4 GENERAL INFORMATION.....	10
4.1 DETAILS OF E.U.T. ....	10
4.2 DESCRIPTION OF SUPPORT UNITS.....	10
4.3 MEASUREMENT UNCERTAINTY.....	10
4.4 STANDARDS APPLICABLE FOR TESTING .....	11
4.5 TEST LOCATION .....	13
4.6 TEST FACILITY .....	13
4.7 DEVIATION FROM STANDARDS.....	13
4.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	13
4.9 MONITORING OF EUT FOR ALL IMMUNITY TEST .....	13
5 EQUIPMENT LIST.....	14
6 EMISSION TEST RESULTS.....	19
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) .....	19
6.1.1 E.U.T. Operation.....	19
6.1.2 Test Setup Diagram.....	19
6.1.3 Measurement Data .....	19
6.2 ASYMMETRIC MODE CONDUCTED EMISSIONS (150kHz-30MHz) .....	24
6.2.1 E.U.T. Operation.....	24
6.2.2 Test Setup Diagram.....	24
6.2.3 Measurement Data .....	24
6.3 RADIATED EMISSIONS (30MHz-1GHz) .....	27
6.3.1 E.U.T. Operation.....	27
6.3.2 Test Setup Diagram.....	27
6.3.3 Measurement Data .....	27
6.4 RADIATED EMISSIONS (ABOVE 1GHz) .....	32
6.4.1 E.U.T. Operation.....	32
6.4.2 Test Setup Diagram.....	32
6.4.3 Measurement Data .....	32
6.5 HARMONIC CURRENT EMISSION .....	37
6.6 VOLTAGE FLUCTUATIONS AND FLICKER .....	38
6.6.1 E.U.T. Operation.....	38
6.6.2 Test Setup Diagram.....	38
6.6.3 Measurement Data .....	38
7 IMMUNITY TEST RESULTS .....	40
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 55024:2010 +A1:2015.....	40
7.2 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014 .....	40
7.3 ELECTROSTATIC DISCHARGE .....	41



7.3.1	E.U.T. Operation.....	41
7.3.2	Test Setup Diagram.....	41
7.3.3	Test Results:.....	42
7.4	ELECTROSTATIC DISCHARGE .....	43
7.4.1	E.U.T. Operation.....	43
7.4.2	Test Setup Diagram.....	43
7.4.3	Test Results:.....	44
7.5	RADIATED IMMUNITY (80MHZ-1GHZ).....	45
7.5.1	E.U.T. Operation.....	45
7.5.2	Test Setup Diagram.....	45
7.5.3	Test Results:.....	45
7.6	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT.....	46
7.6.1	E.U.T. Operation.....	46
7.6.2	Test Setup Diagram.....	46
7.6.3	Test Results:.....	46
7.7	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT.....	47
7.7.1	E.U.T. Operation.....	47
7.7.2	Test Setup Diagram.....	47
7.7.3	Test Results:.....	47
7.8	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT .....	48
7.8.1	E.U.T. Operation.....	48
7.8.2	Test Setup Diagram.....	48
7.8.3	Test Results:.....	48
7.9	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT .....	49
7.9.1	E.U.T. Operation.....	49
7.9.2	Test Setup Diagram.....	49
7.9.3	Test Results:.....	49
7.10	SURGE AT POWER PORT .....	50
7.10.1	E.U.T. Operation .....	50
7.10.2	Test Setup Diagram.....	50
7.10.3	Test Results:.....	51
7.11	SURGE AT POWER PORT .....	52
7.11.1	E.U.T. Operation .....	52
7.11.2	Test Setup Diagram.....	52
7.11.3	Test Results:.....	53
7.12	SURGE AT SIGNAL PORT.....	54
7.12.1	E.U.T. Operation .....	54
7.12.2	Test Setup Diagram.....	54
7.12.3	Test Results:.....	54
7.13	SURGE AT SIGNAL PORT.....	55
7.13.1	E.U.T. Operation .....	55
7.13.2	Test Setup Diagram.....	55
7.13.3	Test Results:.....	55
7.14	CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz) .....	56
7.14.1	E.U.T. Operation .....	56
7.14.2	Test Setup Diagram.....	56
7.14.3	Test Results:.....	56
7.15	CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-80MHz).....	57
7.15.1	E.U.T. Operation .....	57
7.15.2	Test Setup Diagram.....	57
7.15.3	Test Results:.....	57
7.16	VOLTAGE DIPS AND INTERRUPTIONS.....	58

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





7.16.1	E.U.T. Operation .....	58
7.16.2	Test Setup Diagram.....	58
7.16.3	Test Results:.....	58
7.17	VOLTAGE DIPS AND INTERRUPTIONS.....	59
7.17.1	E.U.T. Operation .....	59
7.17.2	Test Setup Diagram.....	59
7.17.3	Test Results:.....	59
7.18	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING.....	60
7.18.1	E.U.T. Operation .....	60
7.18.2	Test Setup:.....	60
7.18.3	Test Results:.....	60
7.19	RADIATED IMMUNITY(80MHZ-2.7GHZ).....	61
7.19.1	E.U.T. Operation .....	61
7.19.2	Test Setup Diagram.....	61
7.19.3	Test Results:.....	61
7.20	CONDUCTED IMMUNITY AT POWER PORT (150KHZ-100MHZ) .....	62
7.20.1	E.U.T. Operation .....	62
7.20.2	Test Setup Diagram.....	62
7.20.3	Test Results:.....	62
7.21	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHZ-100MHZ) .....	63
7.21.1	E.U.T. Operation .....	63
7.21.2	Test Setup Diagram.....	63
7.21.3	Test Results:.....	63
<b>8</b>	<b>PHOTOGRAPHS.....</b>	<b>64</b>
8.1	CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) TEST SETUP.....	64
8.2	ASYMMETRIC MODE CONDUCTED EMISSIONS (150KHZ-30MHZ) TEST SETUP .....	65
8.3	RADIATED EMISSIONS (30MHZ-1GHZ) TEST SETUP .....	66
8.4	RADIATED EMISSIONS (ABOVE 1GHZ) TEST SETUP .....	67
8.5	VOLTAGE FLUCTUATIONS AND FLICKER TEST SETUP .....	68
8.6	ELECTROSTATIC DISCHARGE TEST SETUP .....	69
8.7	RADIATED IMMUNITY (80MHZ-1GHZ) TEST SETUP.....	71
8.8	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT TEST SETUP .....	72
8.9	ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT TEST SETUP.....	73
8.10	SURGE AT POWER PORT TEST SETUP .....	74
8.11	SURGE AT SIGNAL PORT TEST SETUP .....	75
8.12	CONDUCTED IMMUNITY AT POWER PORT (150KHZ-80MHZ) TEST SETUP .....	76
8.13	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHZ-80MHZ) TEST SETUP .....	77
8.14	VOLTAGE DIPS AND INTERRUPTIONS TEST SETUP .....	78
8.15	MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING TEST SETUP.....	79
8.16	RADIATED IMMUNITY(80MHZ-2.7GHZ) TEST SETUP.....	80
8.17	CONDUCTED IMMUNITY AT POWER PORT (150KHZ-100MHZ) TEST SETUP .....	81
8.18	CONDUCTED IMMUNITY AT SIGNAL PORT (150KHZ-100MHZ) TEST SETUP .....	82
8.19	EUT CONSTRUCTIONAL DETAILS.....	83



## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC12V or PoE
Cable:	signal cable with USB-A for IPC-HUM8231-L3 and IPC-HUM8231-L1
Internal source:	720MHz

### 4.2 Description of Support Units

Description	Manufacturer	Model No.
Laptop 1	LENOVO	R400
Switching Adapter 1	Aoepower	BSW0127-1210002
PoE Adapter	PowerDsine	PD-9001GR/AC

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	3.2dB (9kHz to 150kHz)
		3.0dB (150kHz to 30MHz)
	Conducted Emission at mains port using VP	1.9 dB(9kHz to 30MHz)
	Conducted Emission at telecommunication port using AAN	2.4 dB(150kHz to 30MHz)
2	Radiated Power	3.5dB
3	Radiated emission	4.4dB (30MHz-1GHz )
		4.6dB (1GHz-6GHz )
4	Radiated Immunity	1.64dB
5	Conducted Immunity	0.96dB
6	ESD	6 %
7	EFT (Electrical Fast Transients)	5 %
8	Surge Immunity	5 %
9	Voltage Dips and Interruptions	4 %
10	20 system	1.5dB
11	Temperature test	1 °C
12	Humidity test	3%
13	DC power test	0.5 %



#### 4.4 Standards Applicable for Testing

**Table 1 : Tests Carried Out Under EN 55032:2015**

Item	Status
Conducted Emissions at Mains Terminals (150kHz-30MHz)	✓
Conducted Differential Voltage Emissions (30MHz-1GHz)	×
Conducted Differential Voltage Emissions (30MHz-2.15GHz)	×
Asymmetric Mode Conducted Emissions (150kHz-30MHz)	✓
Radiated Emissions (30MHz-1GHz)	✓
Radiated Emissions (above 1GHz)	✓
Conducted Emissions at DC Terminals (150kHz-30MHz)	×

**Table 2 : Tests Carried Out Under EN 61000-3-2:2014**

Item	Status
Harmonic Current Emission	×

**Table 3 : Tests Carried Out Under EN 61000-3-3:2013**

Item	Status
Voltage Fluctuations and Flicker	✓

**Table 4 : Tests Carried Out Under EN 55024:2010 +A1:2015**

Item	Status
Electrostatic Discharge	✓
Radiated Immunity (80MHz-1GHz)	✓
Electrical Fast Transients/Burst at Power Port	✓
Electrical Fast Transients/Burst at Signal Port	✓
Surge at Power Port	✓
Surge at Signal Port	✓
Conducted Immunity at Power Port (150kHz-80MHz)	✓
Conducted Immunity at Signal Port (150kHz-80MHz)	✓
Power Frequency Magnetic Field	×
Voltage Dips and Interruptions	✓



**Table 5 : Tests Carried Out Under EN 50130-4:2011 +A1:2014**

Item	Status
Electrostatic Discharge	√
Electrical Fast Transients/Burst at Power Port	√
Electrical Fast Transients/Burst at Signal Port	√
Surge at Power Port	√
Surge at Signal Port	√
Voltage Dips and Interruptions	√
Mains Supply Voltage Variations-Conditioning	√
Radiated Immunity(80MHz-2.7GHz)	√
Conducted Immunity at Power Port (150kHz-100MHz)	√
Electrical Fast Transients/Burst at DC port	×
Surge at DC Port	×
Conducted Immunity at Signal Port (150kHz-100MHz)	√
Conducted Immunity at DC Port (150kHz-100MHz)	×

× Indicates that the test is not applicable  
√ Indicates that the test is applicable



#### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868,C-4336,T-2221,G-830 respectively.

#### **4.7 Deviation from Standards**

None

#### **4.8 Abnormalities from Standard Conditions**

None

#### **4.9 Monitoring of EUT for All Immunity Test**

Visual: work status and video quality



## 5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2016-12-29	2017-12-28
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2017-05-17	2018-05-16
Line impedance stabilization network	EMCO	3816/2	SHEM019-1	2016-12-29	2017-12-28
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2017-08-01	2018-07-31
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2016-12-29	2017-12-28

Asymmetric Mode Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2016-12-29	2017-12-28
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2017-05-17	2018-05-16
8-wire ISN cat 5	SCHWARZBECK	CAT5 8158	SHEM137-1	2016-12-29	2017-12-28
8-wire ISN cat 3	SCHWARZBECK	CAT3 8158	SHEM137-2	2016-12-29	2017-12-28
8-wire ISN cat 6	SCHWARZBECK	NTFM8158	SHEM137-3	2016-12-29	2017-12-28
2-Draht ISN	Schwarzbeck - Mess-Elektronik	NTFM 8131	SHEM139-1	2016-12-29	2017-12-28

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2016-10-08	2017-10-07
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2017-02-28	2018-02-27
Low Frequency Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2017-08-01	2018-07-31
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21



Radiated Emissions (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2016-10-08	2017-10-07
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	SHEM050-1	2017-01-14	2018-01-13
High-amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2017-01-14	2018-01-13
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

Voltage Fluctuations and Flicker					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2016-09-06	2017-09-05
AC Power Source 5KVA	AMETEK	5001IX	SHEM025-2	2016-09-06	2017-09-05

Electrostatic Discharge					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-1	2016-12-29	2017-12-28

Radiated Immunity (80MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2016-12-29	2017-12-28
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2016-12-29	2017-12-28
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2017-07-22	2018-07-21
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6113	SHEM134-1	2016-09-07	2017-09-06
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

Electrical Fast Transients/Burst at Power Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28





**SGS-CSTC Standards Technical Services  
(Shanghai) Co., Ltd.**

Report No.: SHEM170700444101

Page: 16 of 86

Electrical Fast Transients/Burst at Signal Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28
Capacitive coupling clamp	EM test	HFK	SHEM026-2	2016-08-12	2017-08-11
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2016-08-12	2017-08-11

Surge at Power Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28

Surge at Signal Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28
Data coupling network 4 line	EM test	CNV 504	SHEM026-3	2016-08-12	2017-08-11

Conducted Immunity at Power Port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2016-12-29	2017-12-28
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2016-12-29	2017-12-28
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2016-12-29	2017-12-28
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2017-12-28

Conducted Immunity at Signal Port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2016-12-29	2017-12-28
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2017-12-28

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**Voltage Dips and Interruptions**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28

**Mains Supply Voltage Variations-Conditioning**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2016-12-29	2017-12-28

**Radiated Immunity(80MHz-2.7GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2016-12-29	2017-12-28
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2016-12-29	2017-12-28
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2017-07-22	2018-07-21
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6113	SHEM134-1	2016-09-07	2017-09-06
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2018-07-21

**Conducted Immunity at Power Port (150kHz-100MHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2016-12-29	2017-12-28
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2016-12-29	2017-12-28
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2016-12-29	2017-12-28
Shielding Room	ZHONGYU	5*5*3M	SHEM079-6	2016-12-29	2017-12-28



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 18 of 86

Conducted Immunity at Signal Port (150kHz-100MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2016-10-29	2017-10-28
PAMP Conducted RF test system	HAEFFLY	PAMP250	SHEM023-1	2016-12-29	2017-12-28
6dB Attenuator	HUAXIANG	TST-150-761	SHEM151-1	N/A	N/A
Coupling clamp	LIITHI	EM 101	SHEM027-1	2015-05-03	2018-05-02
CDN impedance and K-factor	LUTHI	L-801 M1	SHEM023-5	2016-12-29	2017-12-28
CDN impedance and K-factor	LUTHI	L-801 M2/M3	SHEM023-6	2016-12-29	2017-12-28

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2017-03-03	2018-03-02
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-1~6	2016-08-19	2017-08-18
Digital Multimeter	FLUKE	17B	SHEM043-5	2016-08-15	2017-08-14
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	316	SHEM001-1	2017-01-29	2018-01-28

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 6 Emission Test Results

### 6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	79dB(μV) quasi-peak, 66dB(μV) average
0.5M-30MHz	73dB(μV) quasi-peak, 60dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode:  
a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

#### 6.1.2 Test Setup Diagram

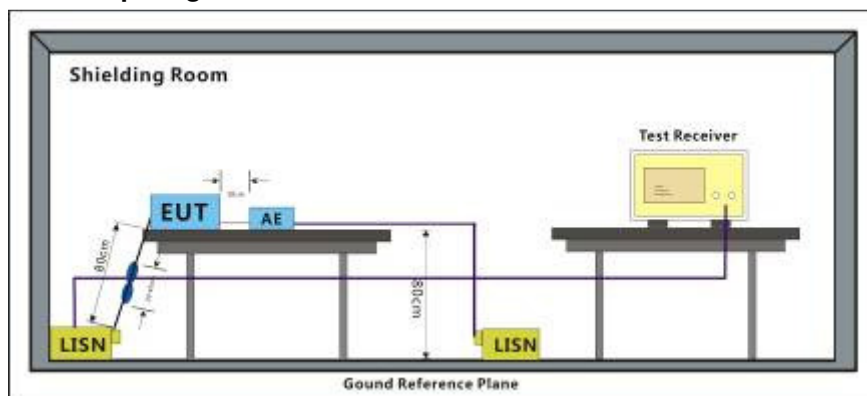


#### 6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.



Mode:a; Line:Live Line

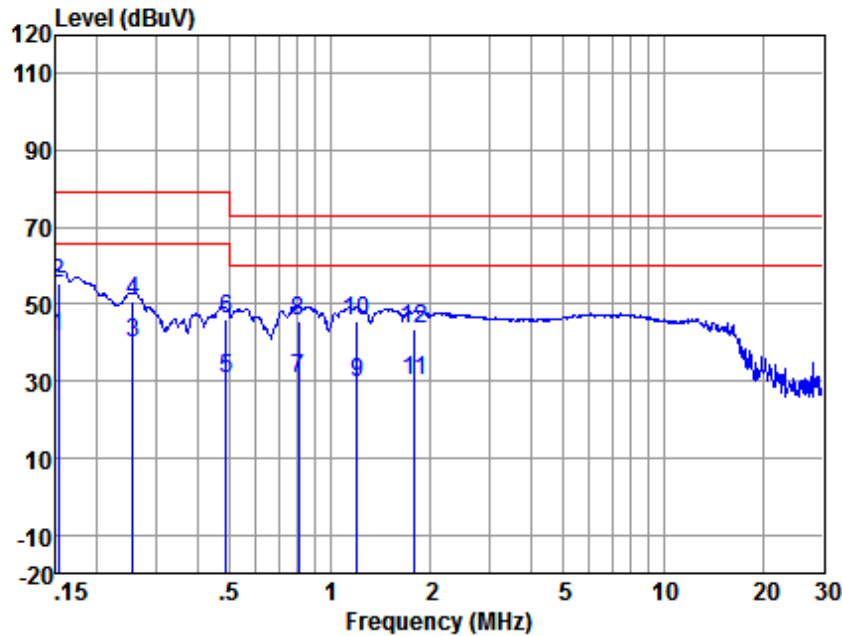


Site : chamber  
Condition : LISN-L-2016  
EUT/Project No: 4441IT  
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	31.58	0.05	9.81	41.44	66.00	-24.56	Average
2	0.152	45.44	0.05	9.81	55.30	79.00	-23.70	QP
3	0.256	30.28	0.09	9.81	40.18	66.00	-25.82	Average
4	0.256	40.62	0.09	9.81	50.52	79.00	-28.48	QP
5	0.486	20.48	0.10	9.82	30.40	66.00	-35.60	Average
6	0.486	36.24	0.10	9.82	46.16	79.00	-32.84	QP
7	0.804	20.53	0.09	9.83	30.45	60.00	-29.55	Average
8	0.804	35.66	0.09	9.83	45.58	73.00	-27.42	QP
9	1.203	19.64	0.08	9.84	29.56	60.00	-30.44	Average
10	1.203	35.66	0.08	9.84	45.58	73.00	-27.42	QP
11	1.790	20.14	0.08	9.85	30.07	60.00	-29.93	Average
12	1.790	33.84	0.08	9.85	43.77	73.00	-29.23	QP



Mode:a; Line:Neutral Line

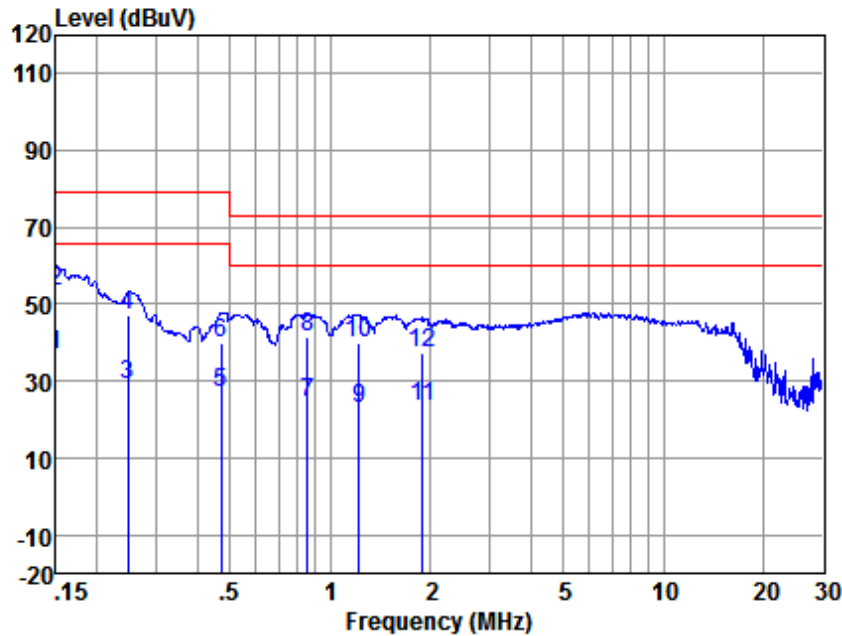


Site : chamber  
Condition : LISN-N-2016  
EUT/Project No: 4441IT  
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	27.06	0.05	9.81	36.92	66.00	-29.08	Average
2	0.150	43.30	0.05	9.81	53.16	79.00	-25.84	QP
3	0.247	19.22	0.05	9.81	29.08	66.00	-36.92	Average
4	0.247	37.55	0.05	9.81	47.41	79.00	-31.59	QP
5	0.471	16.90	0.04	9.82	26.76	66.00	-39.24	Average
6	0.471	29.85	0.04	9.82	39.71	79.00	-39.29	QP
7	0.853	14.79	0.05	9.83	24.67	60.00	-35.33	Average
8	0.853	31.55	0.05	9.83	41.43	73.00	-31.57	QP
9	1.223	13.17	0.05	9.84	23.06	60.00	-36.94	Average
10	1.223	29.89	0.05	9.84	39.78	73.00	-33.22	QP
11	1.898	13.24	0.06	9.85	23.15	60.00	-36.85	Average
12	1.898	27.47	0.06	9.85	37.38	73.00	-35.62	QP



Mode:b; Line:Live Line

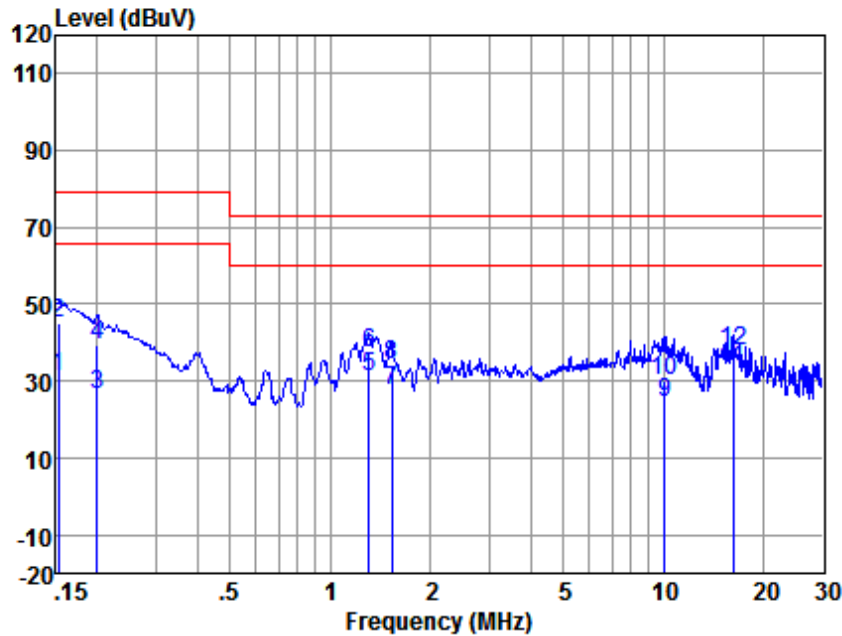


Site : chamber  
Condition : LISN-L-2016  
EUT/Project No: 4441IT  
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	21.52	0.05	9.81	31.38	79.00	-47.62	Average
2	0.152	35.28	0.05	9.81	45.14	79.00	-33.86	QP
3	0.200	16.47	0.09	9.81	26.37	79.00	-52.63	Average
4	0.200	29.67	0.09	9.81	39.57	79.00	-39.43	QP
5	1.310	21.37	0.08	9.84	31.29	73.00	-41.71	Average
6	1.310	27.65	0.08	9.84	37.57	73.00	-35.43	QP
7	1.527	17.40	0.08	9.84	27.32	73.00	-45.68	Average
8	1.527	24.31	0.08	9.84	34.23	73.00	-38.77	QP
9	10.072	14.51	0.19	9.87	24.57	73.00	-48.43	Average
10	10.072	20.21	0.19	9.87	30.27	73.00	-42.73	QP
11	16.226	22.83	0.23	10.02	33.08	73.00	-39.92	Average
12	16.226	27.70	0.23	10.02	37.95	73.00	-35.05	QP



Mode:b; Line:Neutral Line

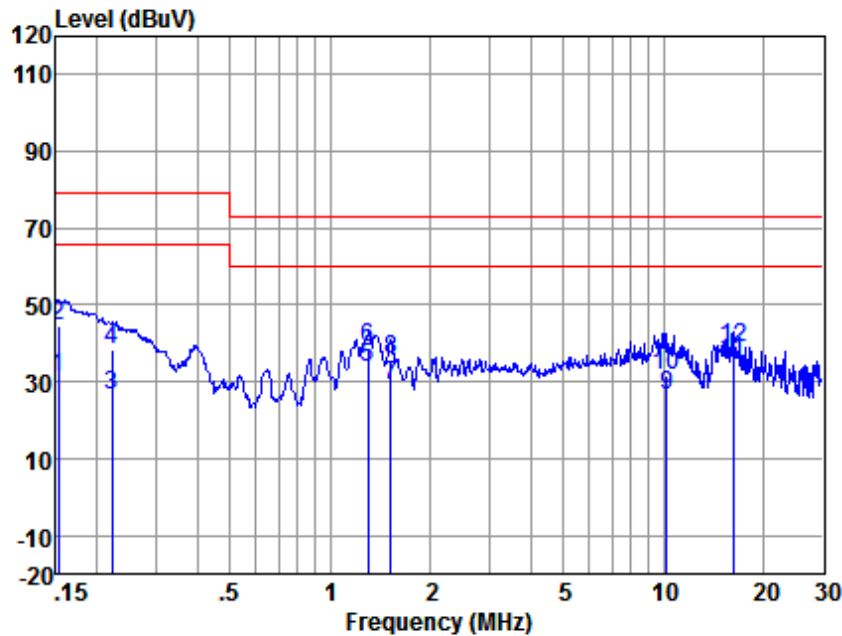

Site : chamber  
Condition : LISN-N-2016  
EUT/Project No: 4441IT  
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	21.08	0.05	9.81	30.94	66.00	-35.06	Average
2	0.152	34.87	0.05	9.81	44.73	79.00	-34.27	QP
3	0.222	16.55	0.05	9.81	26.41	66.00	-39.59	Average
4	0.222	28.34	0.05	9.81	38.20	79.00	-40.80	QP
5	1.303	23.79	0.05	9.84	33.68	60.00	-26.32	Average
6	1.303	29.17	0.05	9.84	39.06	73.00	-33.94	QP
7	1.519	19.43	0.06	9.84	29.33	60.00	-30.67	Average
8	1.519	26.15	0.06	9.84	36.05	73.00	-36.95	QP
9	10.233	16.18	0.21	9.87	26.26	60.00	-33.74	Average
10	10.233	21.65	0.21	9.87	31.73	73.00	-41.27	QP
11	16.226	25.03	0.27	10.02	35.32	60.00	-24.68	Average
12	16.226	28.46	0.27	10.02	38.75	73.00	-34.25	QP



## 6.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz)

Test Requirement: EN 55032:2015

Test Method: EN 55032:2015

### 6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 6.2.2 Test Setup Diagram

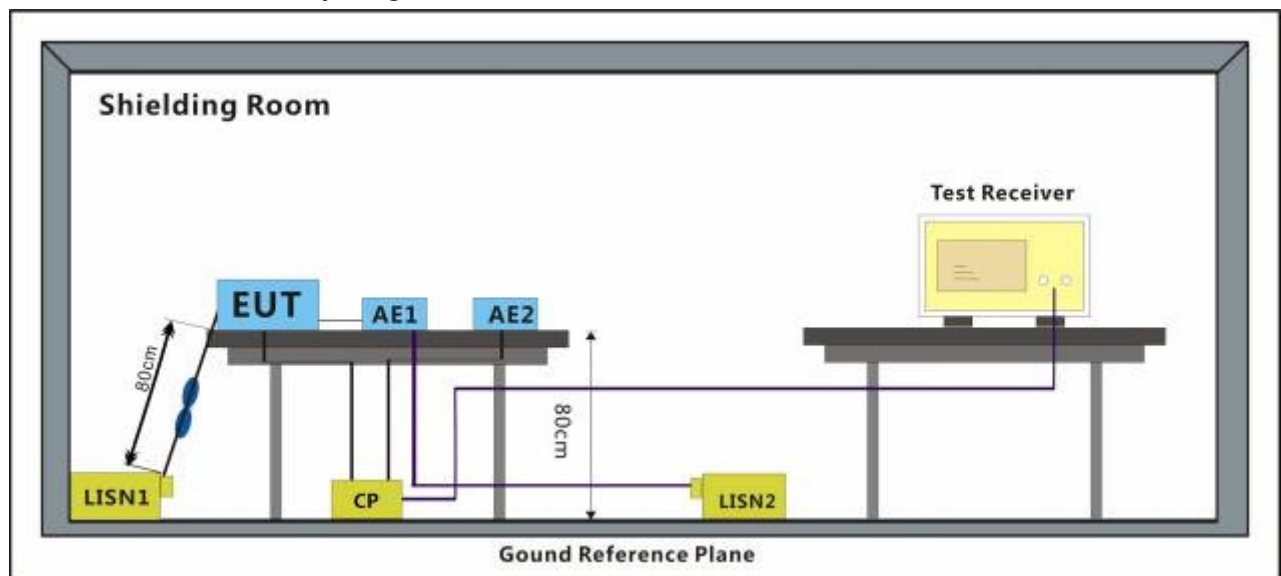


### 6.2.3 Measurement Data





Mode:a

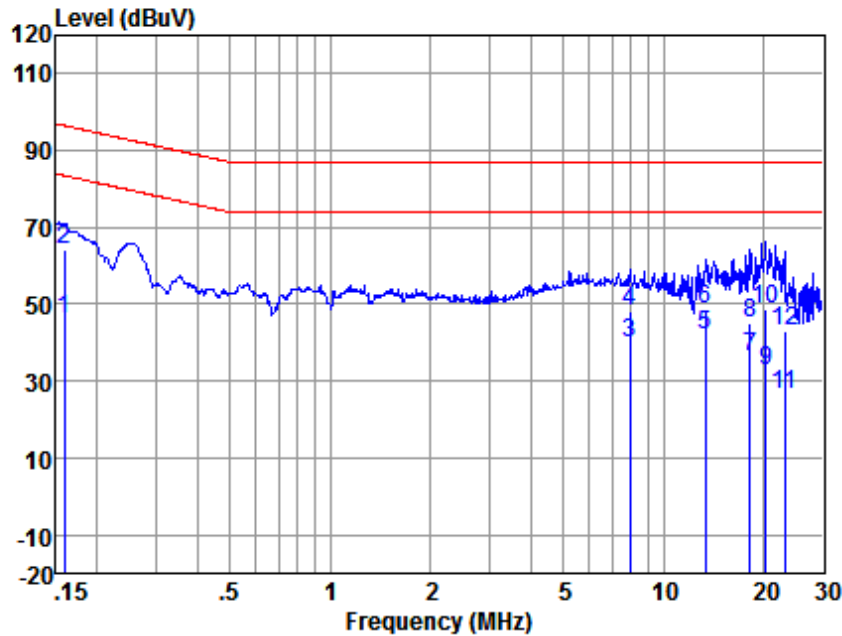


Site : chamber  
Condition : ISN CAT5  
EUT/Project No: 4441IT  
Test mode : a

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.159	26.66	9.73	9.81	46.20	83.52	-37.32	Average
2	0.159	44.53	9.73	9.81	64.07	96.52	-32.45	QP
3	7.935	21.02	9.20	9.86	40.08	74.00	-33.92	Average
4	7.935	29.34	9.20	9.86	48.40	87.00	-38.60	QP
5	13.337	23.05	9.23	9.96	42.24	74.00	-31.76	Average
6	13.337	29.66	9.23	9.96	48.85	87.00	-38.15	QP
7	18.232	16.88	9.28	10.03	36.19	74.00	-37.81	Average
8	18.232	25.99	9.28	10.03	45.30	87.00	-41.70	QP
9	20.270	13.53	9.31	10.03	32.87	74.00	-41.13	Average
10	20.270	29.29	9.31	10.03	48.63	87.00	-38.37	QP
11	23.140	6.94	9.35	10.04	26.33	74.00	-47.67	Average
12	23.140	23.72	9.35	10.04	43.11	87.00	-43.89	QP



Mode:b

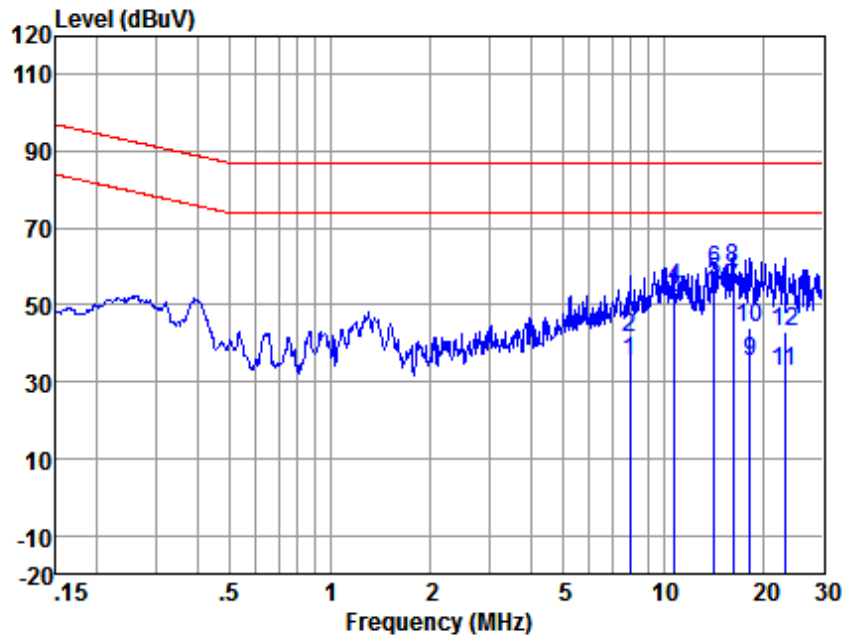

Site : chamber  
Condition : ISN CAT5  
EUT/Project No: 4441IT  
Test mode : b

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	7.935	16.38	9.20	9.86	35.44	74.00	-38.56	Average
2	7.935	22.47	9.20	9.86	41.53	87.00	-45.47	QP
3	10.790	32.55	9.21	9.88	51.64	74.00	-22.36	Average
4	10.790	35.42	9.21	9.88	54.51	87.00	-32.49	QP
5	14.213	36.55	9.23	10.00	55.78	74.00	-18.22	Average
6	14.213	40.06	9.23	10.00	59.29	87.00	-27.71	QP
7	16.226	35.31	9.25	10.02	54.58	74.00	-19.42	Average
8	16.226	40.44	9.25	10.02	59.71	87.00	-27.29	QP
9	18.232	15.91	9.28	10.03	35.22	74.00	-38.78	Average
10	18.232	24.55	9.28	10.03	43.86	87.00	-43.14	QP
11	23.140	13.47	9.35	10.04	32.86	74.00	-41.14	Average
12	23.140	23.63	9.35	10.04	43.02	87.00	-43.98	QP

### 6.3 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz-230MHz	50 dB( $\mu$ V/m) quasi-peak
230MHz-1GHz	57 dB( $\mu$ V/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

#### 6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

#### 6.3.2 Test Setup Diagram

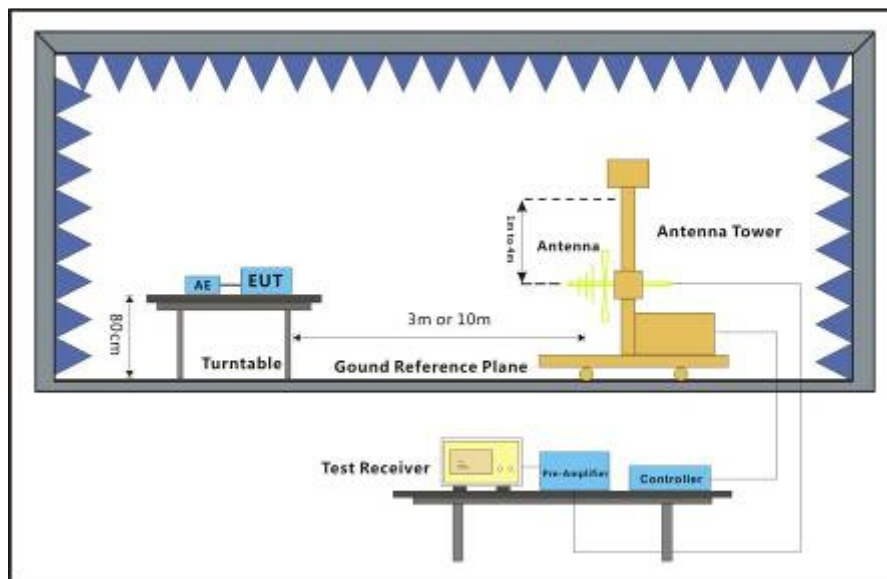


#### 6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.



Mode:a; Polarization:Horizontal

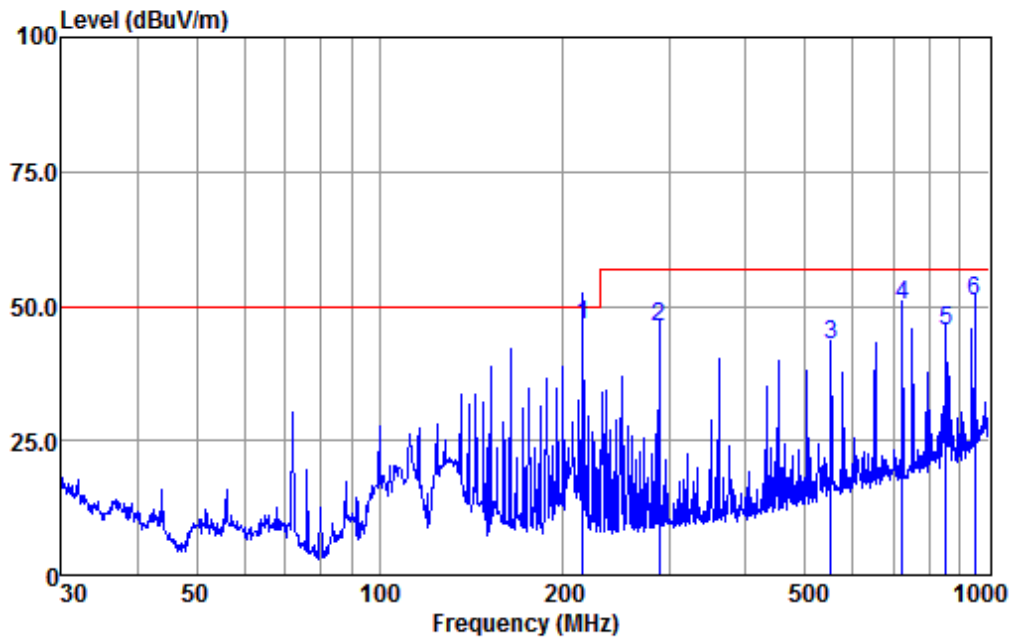


Condition : HORIZONTAL  
EUT/Project: 4441IT  
Test mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 q	216.01	78.07	10.12	0.72	42.47	46.44	50.00	-3.56	QP
2	287.99	74.98	12.81	0.83	42.36	46.26	57.00	-10.74	QP
3	550.95	65.22	18.38	1.28	42.16	42.72	57.00	-14.28	QP
4	721.73	70.13	20.60	1.75	42.40	50.08	57.00	-6.92	QP
5	851.04	63.16	22.32	2.28	42.22	45.54	57.00	-11.46	QP
6	952.09	66.80	23.29	2.63	41.70	51.02	57.00	-5.98	QP



Mode:a; Polarization:Vertical

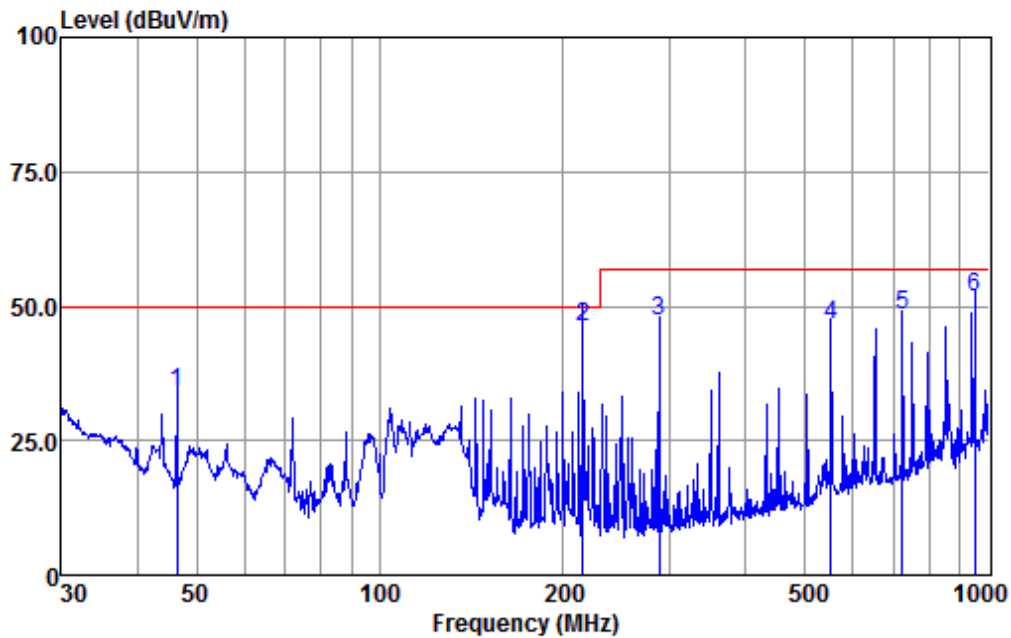


Condition : VERTICAL  
EUT/Project: 4441IT  
Test mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	46.50	63.98	12.47	0.24	42.68	34.01	50.00	-15.99	QP
2 q	216.00	77.77	10.12	0.72	42.47	46.14	50.00	-3.86	QP
3	287.99	75.84	12.81	0.83	42.36	47.12	57.00	-9.88	QP
4	550.95	69.16	18.38	1.28	42.16	46.66	57.00	-10.34	QP
5	721.73	68.31	20.60	1.75	42.40	48.26	57.00	-8.74	QP
6	952.09	67.49	23.29	2.63	41.70	51.71	57.00	-5.29	QP



Mode:b; Polarization:Horizontal

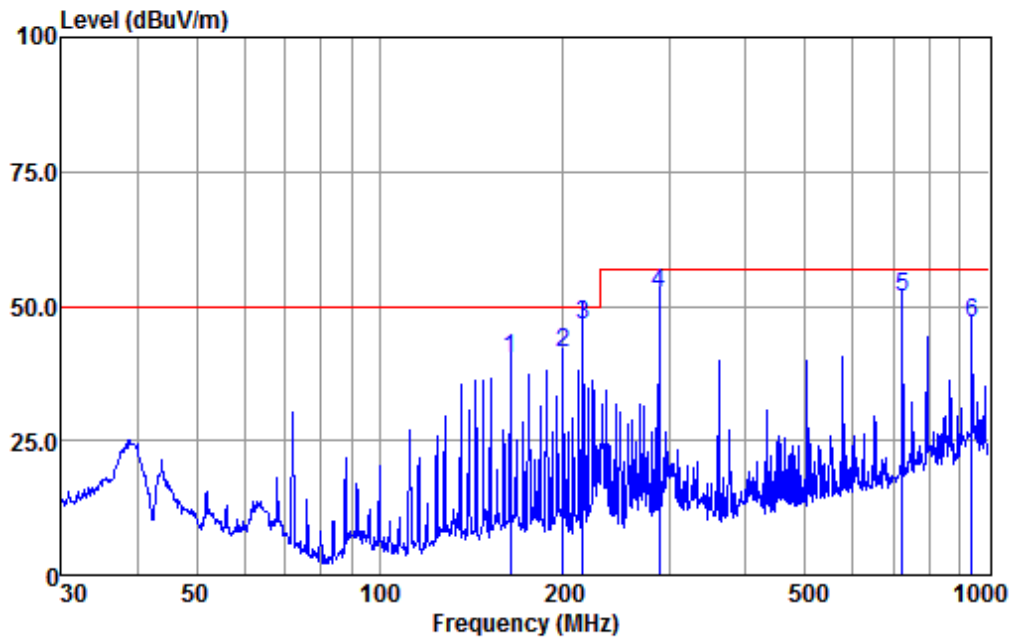


Condition : HORIZONTAL  
EUT/Project: 4441IT  
Test mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	163.76	69.72	12.52	0.64	42.55	40.33	50.00	-9.67	QP
2	199.99	73.60	9.40	0.69	42.50	41.19	50.00	-8.81	QP
3 q	216.02	78.27	10.12	0.72	42.47	46.64	50.00	-3.36	QP
4	287.99	81.24	12.81	0.83	42.36	52.52	57.00	-4.48	QP
5	721.73	71.80	20.60	1.75	42.40	51.75	57.00	-5.25	QP
6	938.83	62.94	23.14	2.56	41.80	46.84	57.00	-10.16	QP



Mode:b; Polarization:Vertical

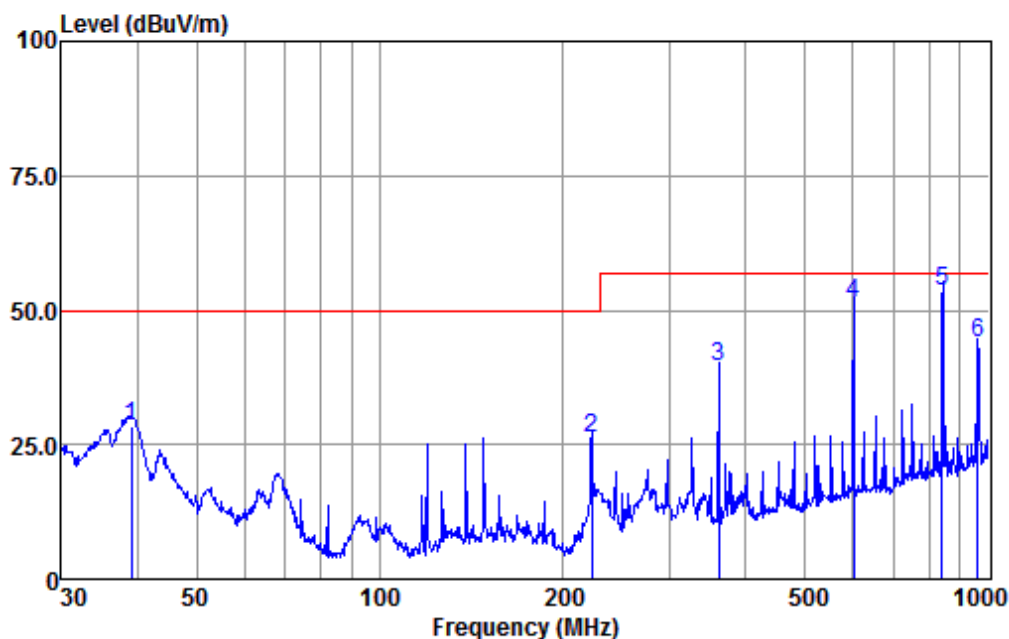

Condition : VERTICAL  
EUT/Project: 4441IT  
Test mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	39.16	54.59	16.23	0.22	42.68	28.36	50.00	-21.64	QP
2	222.95	57.44	10.42	0.73	42.46	26.13	50.00	-23.87	QP
3	360.45	66.20	14.40	0.93	42.18	39.35	57.00	-17.65	QP
4	601.43	72.77	19.42	1.38	42.19	51.38	57.00	-5.62	QP
5 q	840.04	71.31	22.23	2.21	42.28	53.47	57.00	-3.53	QP
6	962.16	59.39	23.40	2.66	41.65	43.80	57.00	-13.20	QP



## 6.4 Radiated Emissions (above 1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
1GHz-3GHz	76 dB( $\mu$ V/m) peak, 56 dB( $\mu$ V/m) average
3GHz-6GHz	80 dB( $\mu$ V/m) peak, 60dB( $\mu$ V/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

### 6.4.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 6.4.2 Test Setup Diagram

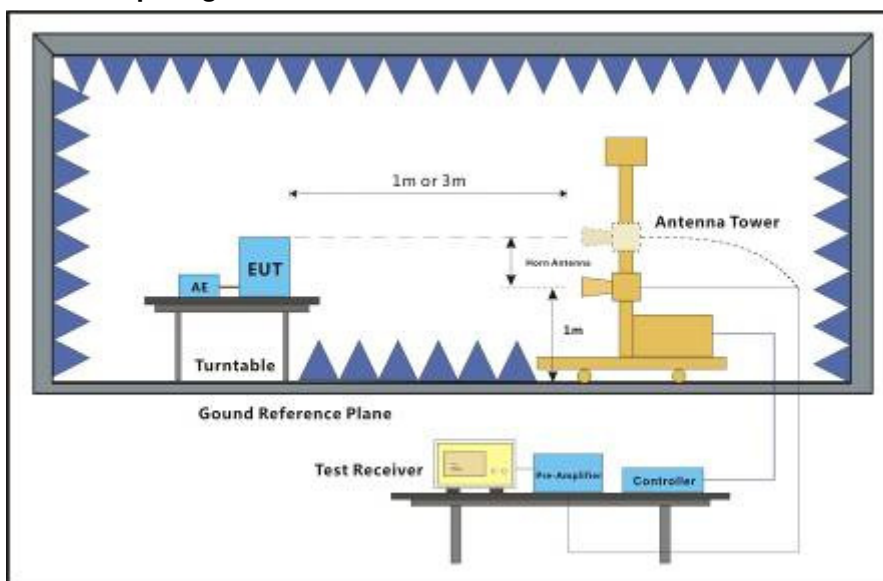


### 6.4.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.





Mode:a; Polarization:Horizontal

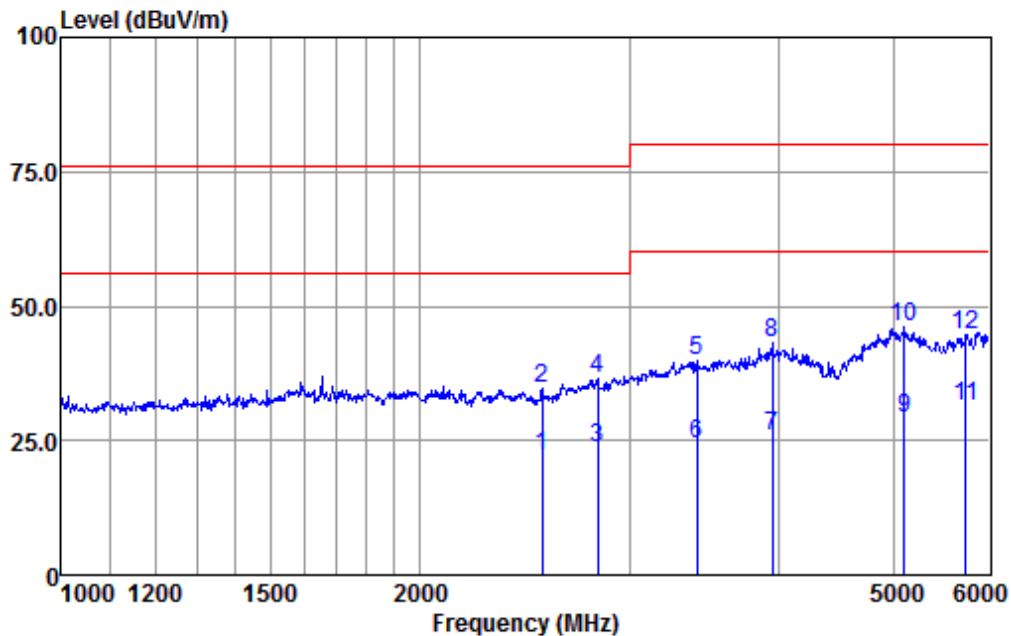

Condition : HORIZONTAL  
EUT/Project: 4441IT  
Test Mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2534.31	31.41	27.49	5.37	42.13	22.14	56.00	-33.86	Average
2	2534.31	44.14	27.49	5.37	42.13	34.87	76.00	-41.13	Peak
3	2821.95	31.71	28.13	5.67	41.86	23.65	56.00	-32.35	Average
4	2821.95	44.73	28.13	5.67	41.86	36.67	76.00	-39.33	Peak
5	3418.31	46.85	28.75	6.21	41.84	39.97	80.00	-40.03	Peak
6	3418.31	31.40	28.75	6.21	41.84	24.52	60.00	-35.48	Average
7	3952.23	31.12	29.60	6.99	41.95	25.76	60.00	-34.24	Average
8	3952.23	48.48	29.60	6.99	41.95	43.12	80.00	-36.88	Peak
9	5097.29	30.94	31.65	8.21	41.68	29.12	60.00	-30.88	Average
10 p	5097.29	47.81	31.65	8.21	41.68	45.99	80.00	-34.01	Peak
11	5747.46	32.75	32.25	8.36	41.92	31.44	60.00	-28.56	Average
12	5747.46	46.13	32.25	8.36	41.92	44.82	80.00	-35.18	Peak




# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 34 of 86

Mode:a; Polarization:Vertical

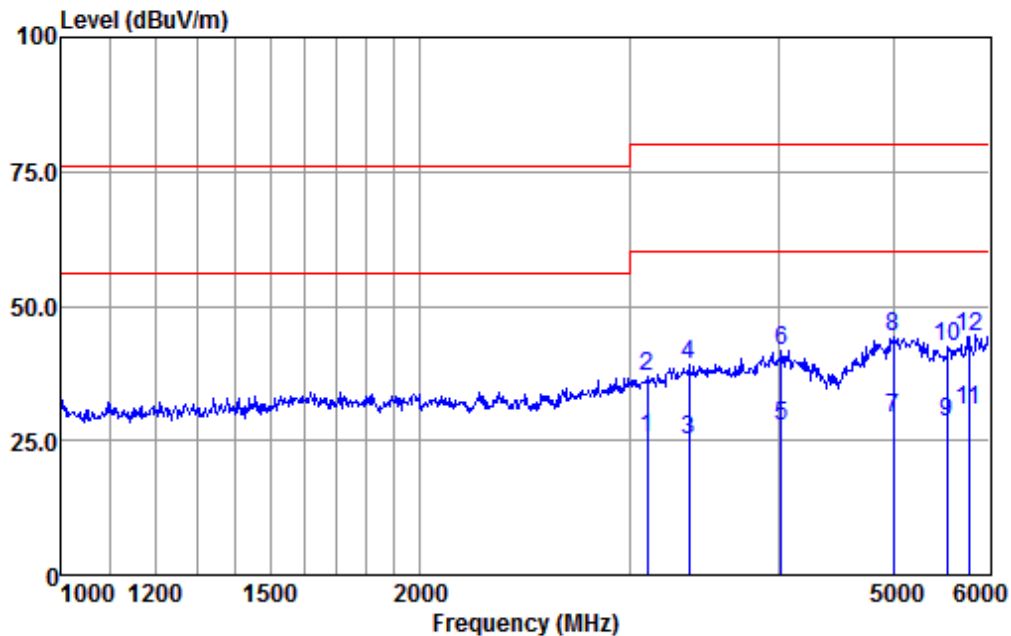

Condition : VERTICAL  
EUT/Project: 4441IT  
Test Mode : a

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3103.07	32.62	28.57	5.89	41.74	25.34	60.00	-34.66	Average
2	3103.07	44.31	28.57	5.89	41.74	37.03	80.00	-42.97	Peak
3	3363.63	32.01	28.73	6.12	41.82	25.04	60.00	-34.96	Average
4	3363.63	45.90	28.73	6.12	41.82	38.93	80.00	-41.07	Peak
5	4023.68	32.70	29.75	7.09	41.94	27.60	60.00	-32.40	Average
6	4023.68	46.85	29.75	7.09	41.94	41.75	80.00	-38.25	Peak
7	4997.81	31.11	31.60	8.19	41.61	29.29	60.00	-30.71	Average
8	4997.81	46.04	31.60	8.19	41.61	44.22	80.00	-35.78	Peak
9	5545.14	29.99	31.97	8.32	41.99	28.29	60.00	-31.71	Average
10	5545.14	44.31	31.97	8.32	41.99	42.61	80.00	-37.39	Peak
11	5778.43	31.87	32.30	8.38	41.91	30.64	60.00	-29.36	Average
12 p	5778.43	45.58	32.30	8.38	41.91	44.35	80.00	-35.65	Peak

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 35 of 86

Mode:b; Polarization:Horizontal

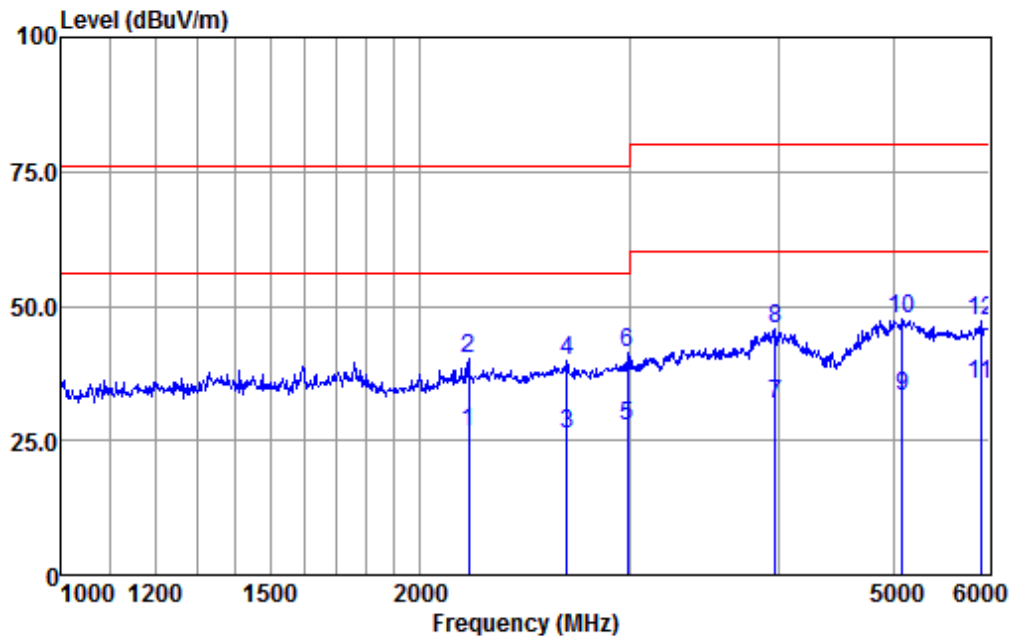


Condition : HORIZONTAL  
EUT/Project: 4441IT  
Test Mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2195.88	37.23	26.58	4.85	42.20	26.46	76.00	-49.54	Average
2	2195.88	50.91	26.58	4.85	42.20	40.14	76.00	-35.86	Peak
3	2655.17	34.91	27.77	5.52	42.02	26.18	76.00	-49.82	Average
4	2655.17	48.52	27.77	5.52	42.02	39.79	76.00	-36.21	Peak
5	2988.48	35.24	28.48	5.79	41.72	27.79	76.00	-48.21	Average
6	2988.48	48.76	28.48	5.79	41.72	41.31	76.00	-34.69	Peak
7	3973.53	36.95	29.64	6.99	41.95	31.63	80.00	-48.37	Average
8	3973.53	51.01	29.64	6.99	41.95	45.69	80.00	-34.31	Peak
9	5079.06	35.15	31.65	8.21	41.67	33.34	80.00	-46.66	Average
10 p	5079.06	49.43	31.65	8.21	41.67	47.62	80.00	-32.38	Peak
11	5914.61	36.30	32.48	8.40	41.86	35.32	80.00	-44.68	Average
12	5914.61	48.14	32.48	8.40	41.86	47.16	80.00	-32.84	Peak



Mode:b; Polarization:Vertical

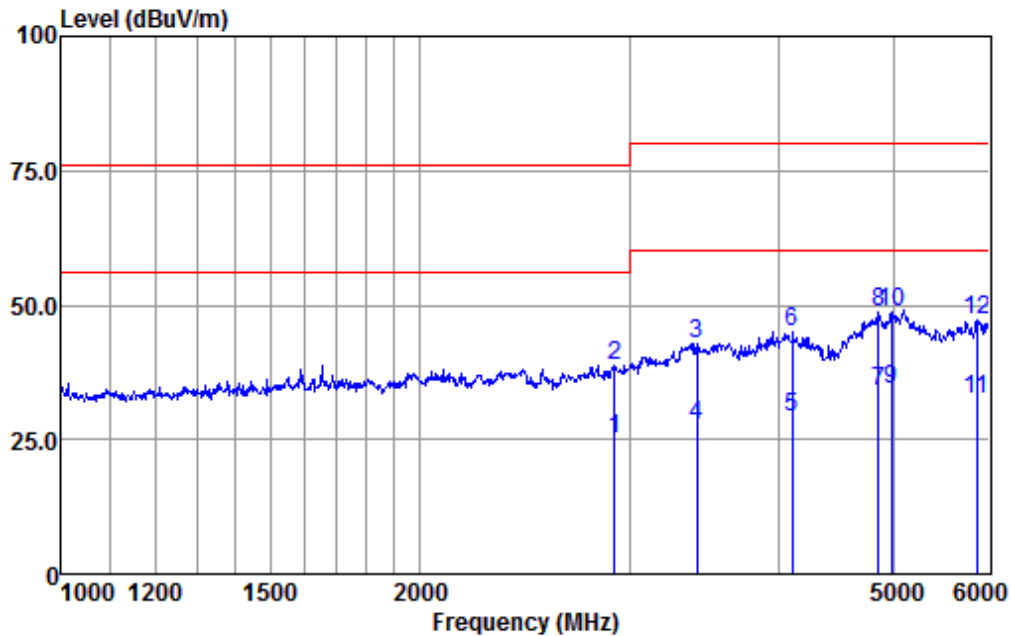

Condition : VERTICAL  
EUT/Project: 4441IT  
Test Mode : b

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2914.45	32.91	28.33	5.76	41.78	25.22	56.00	-30.78	Average
2	2914.45	46.28	28.33	5.76	41.78	38.59	76.00	-37.41	Peak
3	3418.31	49.85	28.75	6.21	41.84	42.97	80.00	-37.03	Peak
4	3418.31	34.40	28.75	6.21	41.84	27.52	60.00	-32.48	Average
5	4111.13	33.93	29.90	7.22	41.89	29.16	60.00	-30.84	Average
6	4111.13	49.80	29.90	7.22	41.89	45.03	80.00	-34.97	Peak
7	4856.57	36.05	31.33	8.15	41.62	33.91	60.00	-26.09	Average
8	4856.57	50.71	31.33	8.15	41.62	48.57	80.00	-31.43	Peak
9	4979.93	36.06	31.55	8.17	41.61	34.17	60.00	-25.83	Average
10 p	4979.93	50.48	31.55	8.17	41.61	48.59	80.00	-31.41	Peak
11	5872.37	33.54	32.41	8.40	41.88	32.47	60.00	-27.53	Average
12	5872.37	48.22	32.41	8.40	41.88	47.15	80.00	-32.85	Peak



## **6.5 Harmonic Current Emission**

Test Requirement: EN 61000-3-2:2014

Test Method: EN 61000-3-2:2014

Frequency Range: 100Hz to 2kHz

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2:2014.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

"For the following categories of equipment, limits are not specified in this standard.- equipment with a rated power of 75W or less, other than lighting equipment."



## 6.6 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013

Test Method: EN 61000-3-3:2013


### 6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1003 mbar

Test mode:  
a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 6.6.2 Test Setup Diagram

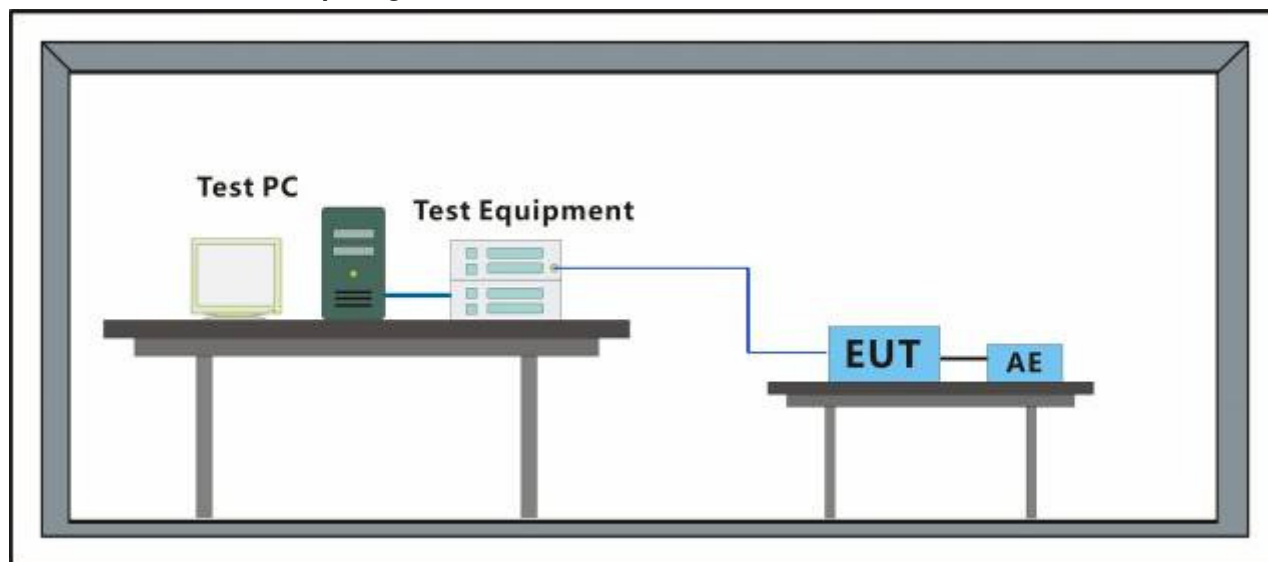

### 6.6.3 Measurement Data



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 39 of 86

## Mode:a

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.79		
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.61	Test limit (%):	3.30 Pass
Highest dmax (%):	0.79	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.302	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.155	Test limit:	0.650 Pass

## Mode:b

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.79		
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.70	Test limit (%):	3.30 Pass
Highest dmax (%):	0.82	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.314	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.159	Test limit:	0.650 Pass



## **7 Immunity Test Results**

### **7.1 Performance Criteria Description in EN 55024:2010 +A1:2015**

**Criterion A**

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

**Criterion B**

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

**Criterion C**

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

### **7.2 Performance Criteria Description in EN 50130-4:2011 +A1:2014**

There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.



### 7.3 Electrostatic Discharge

Test Requirement:	EN 55024:2010 +A1:2015
Test Method:	EN 61000-4-2:2009
Performance Criterion:	B
Discharge Impedance:	330Ω/150pF
Number of Discharge:	Minimum of four test points (a minimum of 50 discharges at each point)
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum


### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C      Humidity: 51 % RH      Atmospheric Pressure: 1002 mbar

Test mode:       a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
                  b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.3.2 Test Setup Diagram

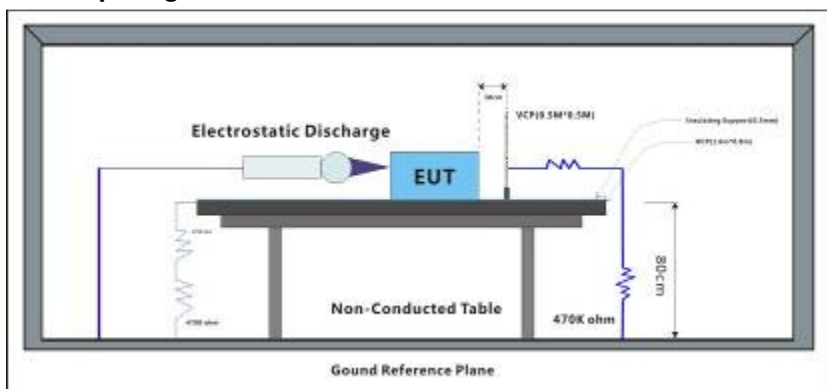



**7.3.3 Test Results:**

Observations:

Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A

**Results:**

A: No degradation in the performance of the EUT was observed.

## 7.4 Electrostatic Discharge

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-2:2009
Number of Discharge:	Minimum 10 times at each test point for Air Discharge Minimum 50 times at each test point for Contact or VCP & HCP Discharge
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residu

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C      Humidity: 51 % RH      Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.4.2 Test Setup Diagram

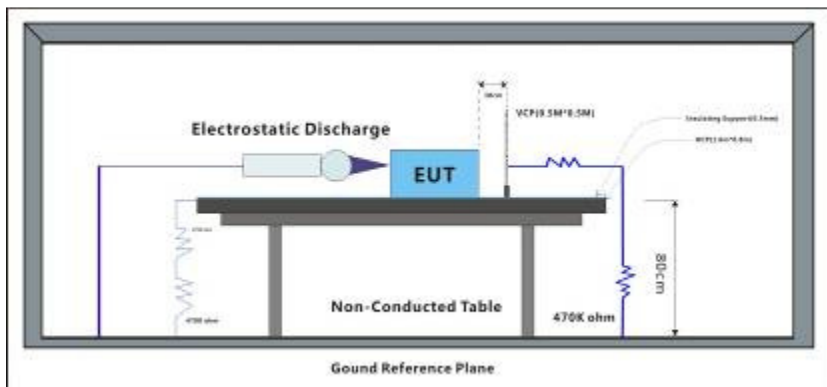



**7.4.3 Test Results:**

Observations:

Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A
Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A

**Results:**

A: No degradation in the performance of the EUT was observed.

## 7.5 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010  
Performance Criterion: A  
Frequency Range: 80MHz to 1GHz  
Antenna Polarisation: Vertical and Horizontal  
Modulation: 1kHz, 80% Amp. Mod, 1% increment


### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode:  
a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.5.2 Test Setup Diagram

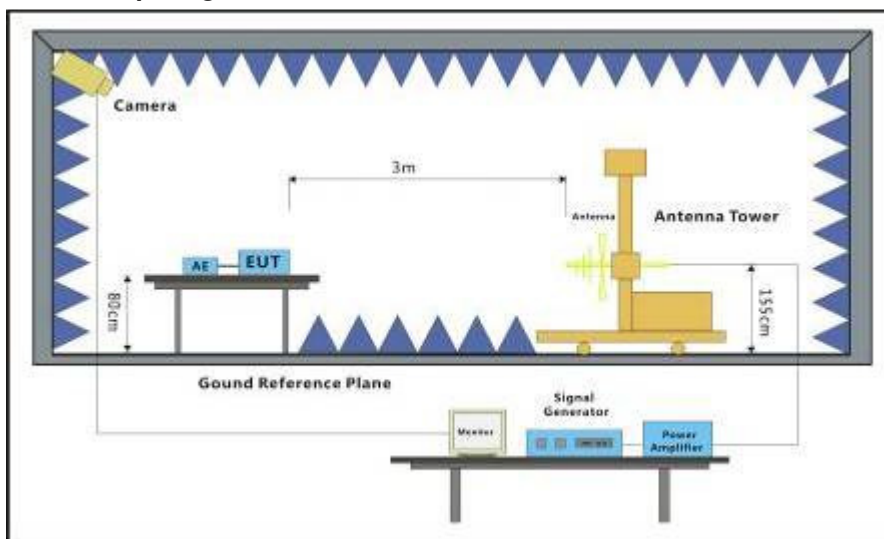

### 7.5.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	2s	A
80MHz-1GHz	3	Back	2s	A
80MHz-1GHz	3	Left	2s	A
80MHz-1GHz	3	Right	2s	A
80MHz-1GHz	3	Top	2s	A
80MHz-1GHz	3	Underside	2s	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.6 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-4:2012  
Performance Criterion: B  
Repetition Frequency: 5kHz  
Burst Period: 300ms  
Test Duration: 2 minute per level & polarity


### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.6.2 Test Setup Diagram

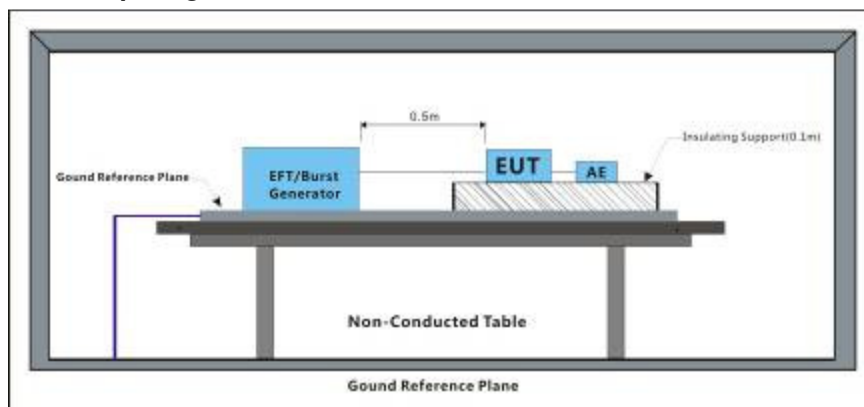

### 7.6.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.7 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-4:2012

Repetition Frequency: 100kHz

Burst Period: 300ms

Test Duration: 1 minute per level & polarity

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.7.2 Test Setup Diagram

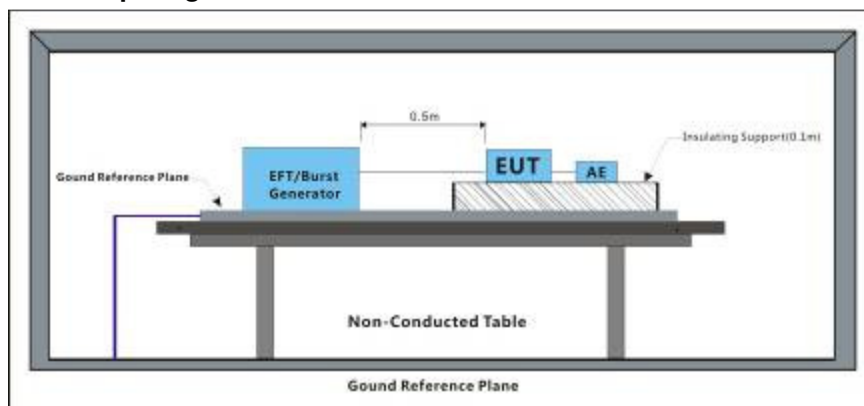

### 7.7.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A

#### Results:

A: No degradation in the performance of the EUT was observed.



## 7.8 Electrical Fast Transients/Burst at Signal Port


Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-4:2012  
Performance Criterion: B  
Repetition Frequency: 5kHz  
Burst Period: 300ms  
Test Duration: 2 minute per level & polarity

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar  
Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.8.2 Test Setup Diagram

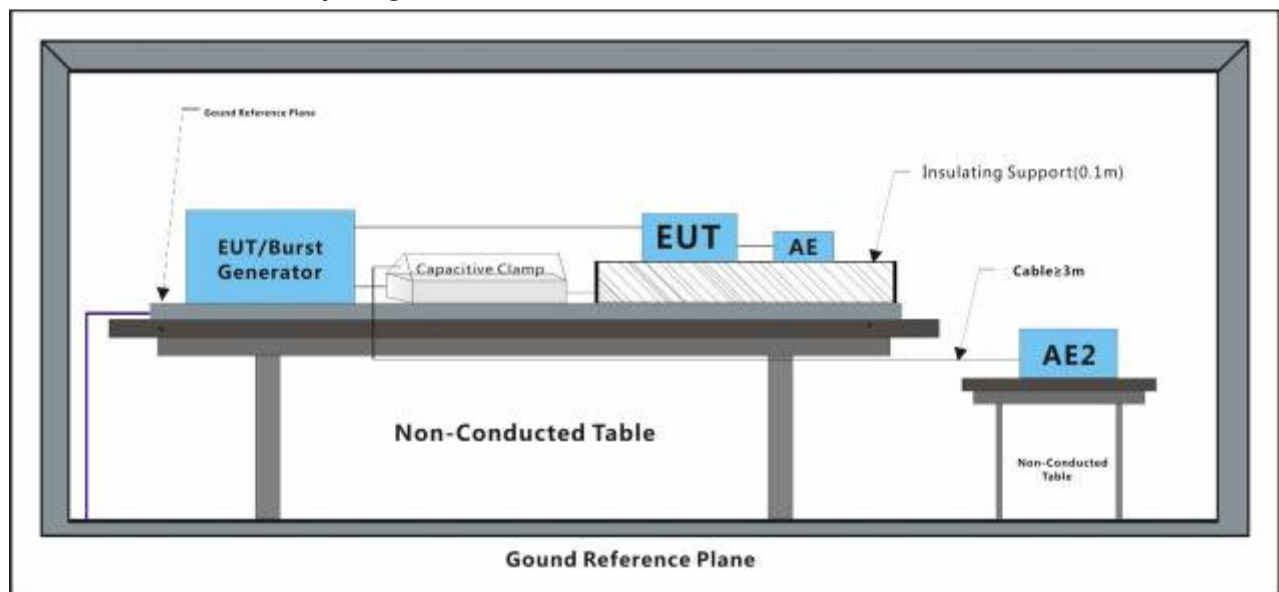

### 7.8.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	0.5	+	Clamp	A
Signal port	0.5	-	Clamp	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.9 Electrical Fast Transients/Burst at Signal Port


Test Requirement: EN 50130-4:2011 +A1:2014  
Test Method: EN 61000-4-4:2012  
Repetition Frequency: 100kHz  
Burst Period: 300ms  
Test Duration: 1 minute per level & polarity

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar  
Test mode: a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.9.2 Test Setup Diagram

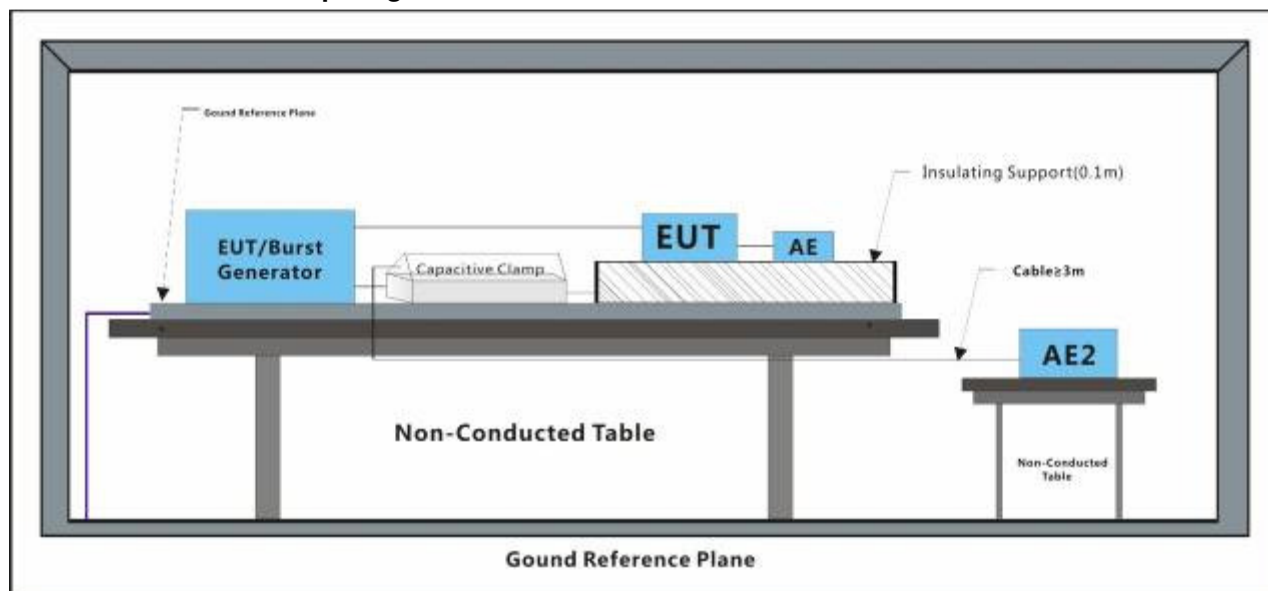

### 7.9.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	1	+	Clamp	A
Signal port	1	-	Clamp	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.10 Surge at Power Port

Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-5:2014  
Performance Criterion: B  
Interval: 60s between each surge  
No. of surges: 5 positive, 5 negative at 0°, 90°, 180°, 270°.


### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.10.2 Test Setup Diagram

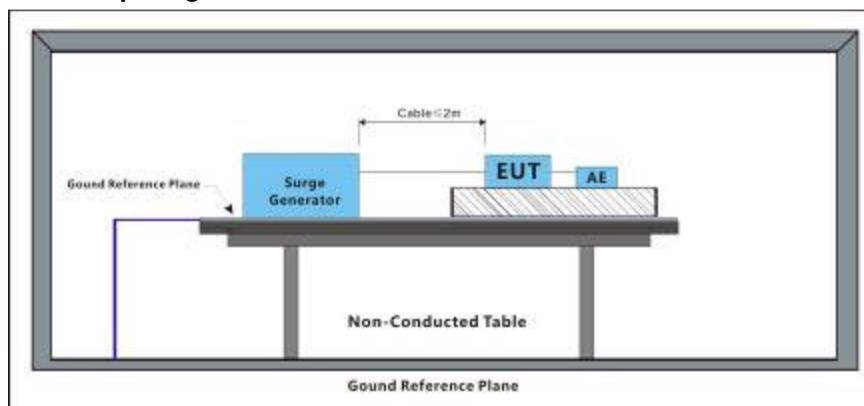



**7.10.3 Test Results:**

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A
L-PE	2	+	0°	A
L-PE	2	-	0°	A
L-PE	2	+	90°	A
L-PE	2	-	90°	A
L-PE	2	+	180°	A
L-PE	2	-	180°	A
L-PE	2	+	270°	A
L-PE	2	-	270°	A
N-PE	2	+	0°	A
N-PE	2	-	0°	A
N-PE	2	+	90°	A
N-PE	2	-	90°	A
N-PE	2	+	180°	A
N-PE	2	-	180°	A
N-PE	2	+	270°	A
N-PE	2	-	270°	A

**Results:**

A: No degradation in the performance of the EUT was observed.

## 7.11 Surge at Power Port

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-5:2014
Interval:	60s between each surge
No. of surges:	5 positive, 5 negative
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the surges is permissible, providing that there is no residual c

### 7.11.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.11.2 Test Setup Diagram

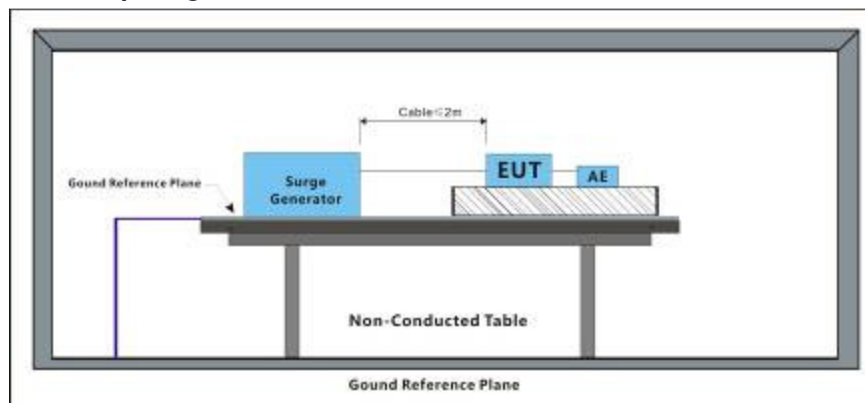



**7.11.3 Test Results:**

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	0.5,1	+	0°	A
L-N	0.5,1	-	0°	A
L-N	0.5,1	+	90°	A
L-N	0.5,1	-	90°	A
L-N	0.5,1	+	180°	A
L-N	0.5,1	-	180°	A
L-N	0.5,1	+	270°	A
L-N	0.5,1	-	270°	A
L-PE	0.5,1,2	+	0°	A
L-PE	0.5,1,2	-	0°	A
L-PE	0.5,1,2	+	90°	A
L-PE	0.5,1,2	-	90°	A
L-PE	0.5,1,2	+	180°	A
L-PE	0.5,1,2	-	180°	A
L-PE	0.5,1,2	+	270°	A
L-PE	0.5,1,2	-	270°	A
N-PE	0.5,1,2	+	0°	A
N-PE	0.5,1,2	-	0°	A
N-PE	0.5,1,2	+	90°	A
N-PE	0.5,1,2	-	90°	A
N-PE	0.5,1,2	+	180°	A
N-PE	0.5,1,2	-	180°	A
N-PE	0.5,1,2	+	270°	A
N-PE	0.5,1,2	-	270°	A

**Results:**

A: No degradation in the performance of the EUT was observed.

## 7.12 Surge at Signal Port


Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-5:2014  
Performance Criterion: B  
Interval: 60s between each surge

### 7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar  
Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.12.2 Test Setup Diagram

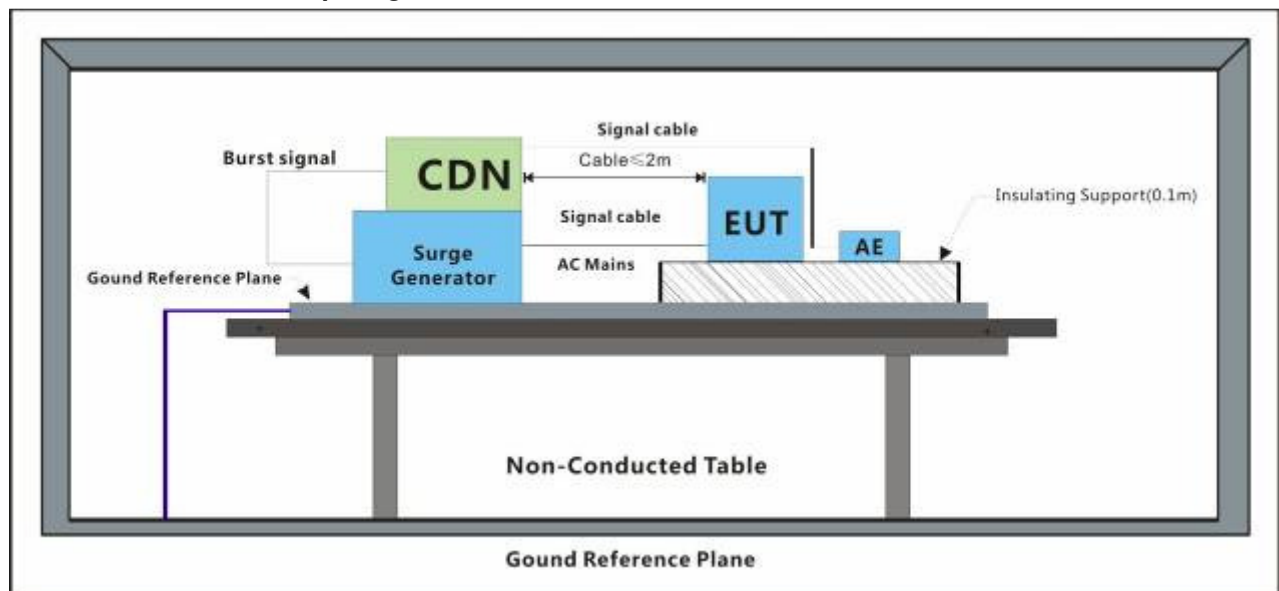

### 7.12.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal port	Line-Ground	1	+	A
Signal port	Line-Ground	1	-	A

#### Results:

A: No degradation in the performance of the EUT was observed.



### 7.13 Surge at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014  
Test Method: EN 61000-4-5:2014


#### 7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

#### 7.13.2 Test Setup Diagram

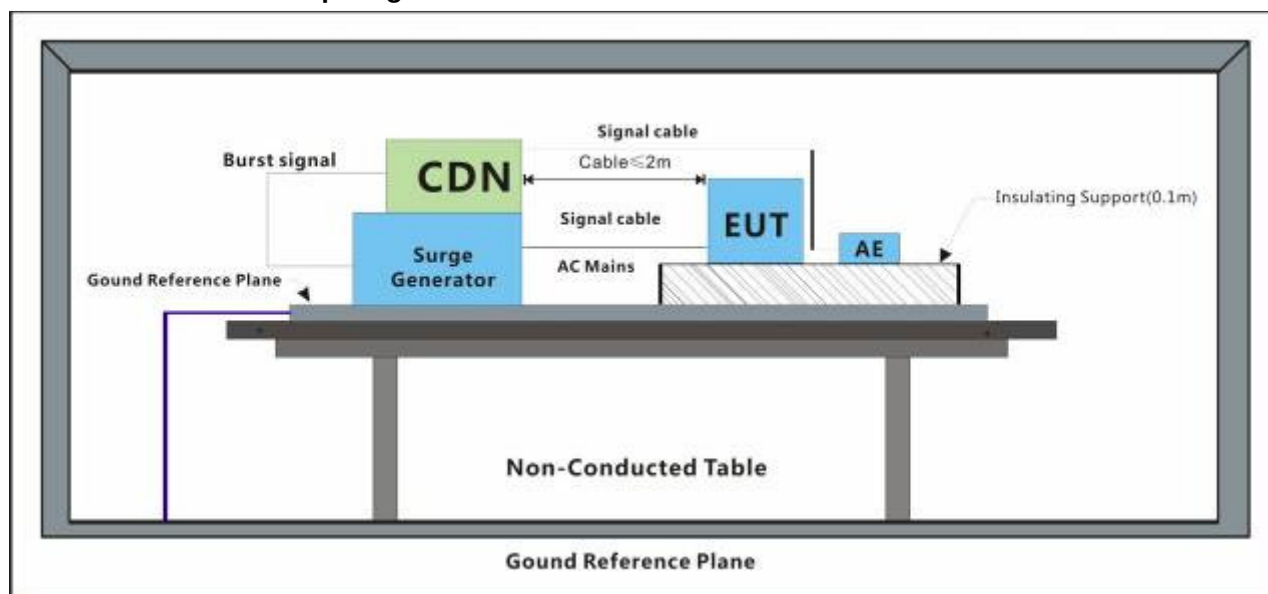

#### 7.13.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal port	Line-Ground	0.5	+	A
Signal port	Line-Ground	0.5	-	A
Signal port	Line-Ground	1	+	A
Signal port	Line-Ground	1	-	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.14 Conducted Immunity at Power Port (150kHz-80MHz)


Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-6:2014  
Performance Criterion: A  
Frequency Range: 0.15MHz to 80MHz  
Modulation: 80%, 1kHz Amplitude Modulation  
Step Size: 1%

### 7.14.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar  
Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.14.2 Test Setup Diagram

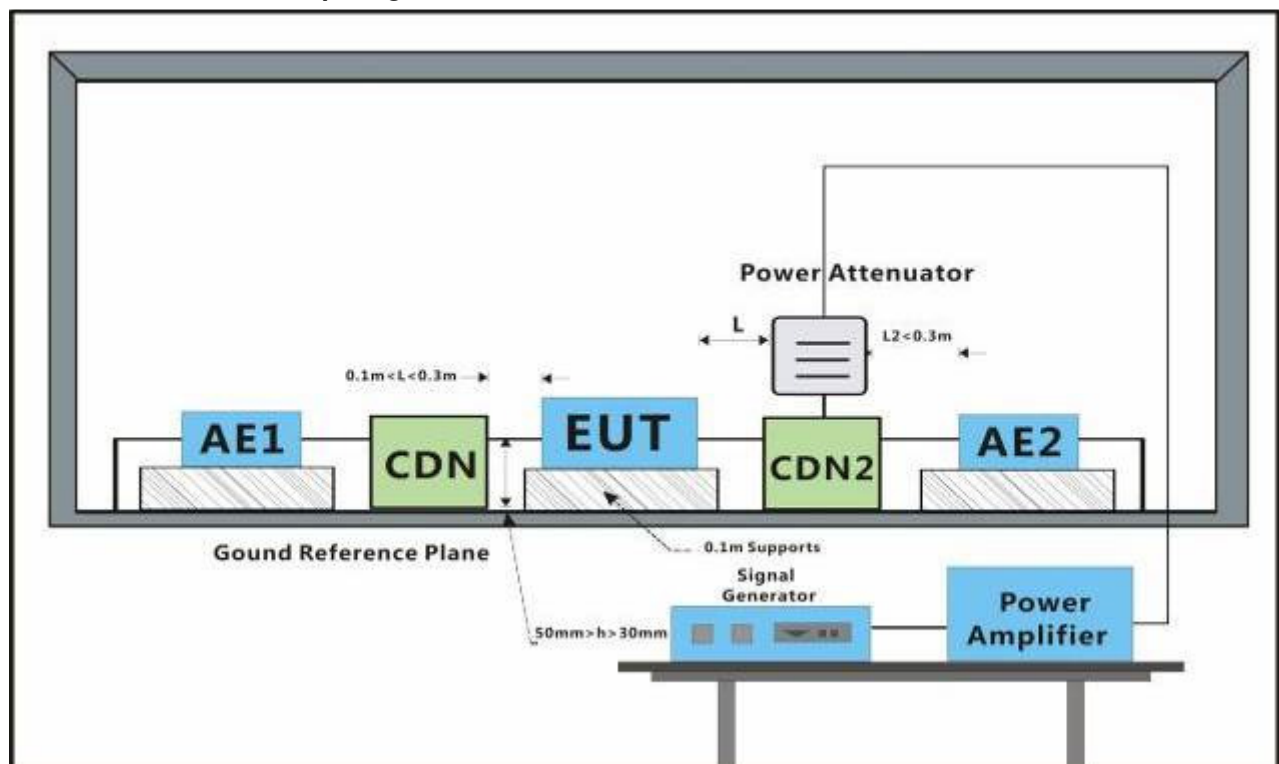

### 7.14.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	2s	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 7.15 Conducted Immunity at Signal Port (150kHz-80MHz)


Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-6:2014  
Performance Criterion: A  
Frequency Range: 0.15MHz to 80MHz  
Modulation: 80%, 1kHz Amplitude Modulation  
Step Size: 1%

### 7.15.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar  
Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.15.2 Test Setup Diagram

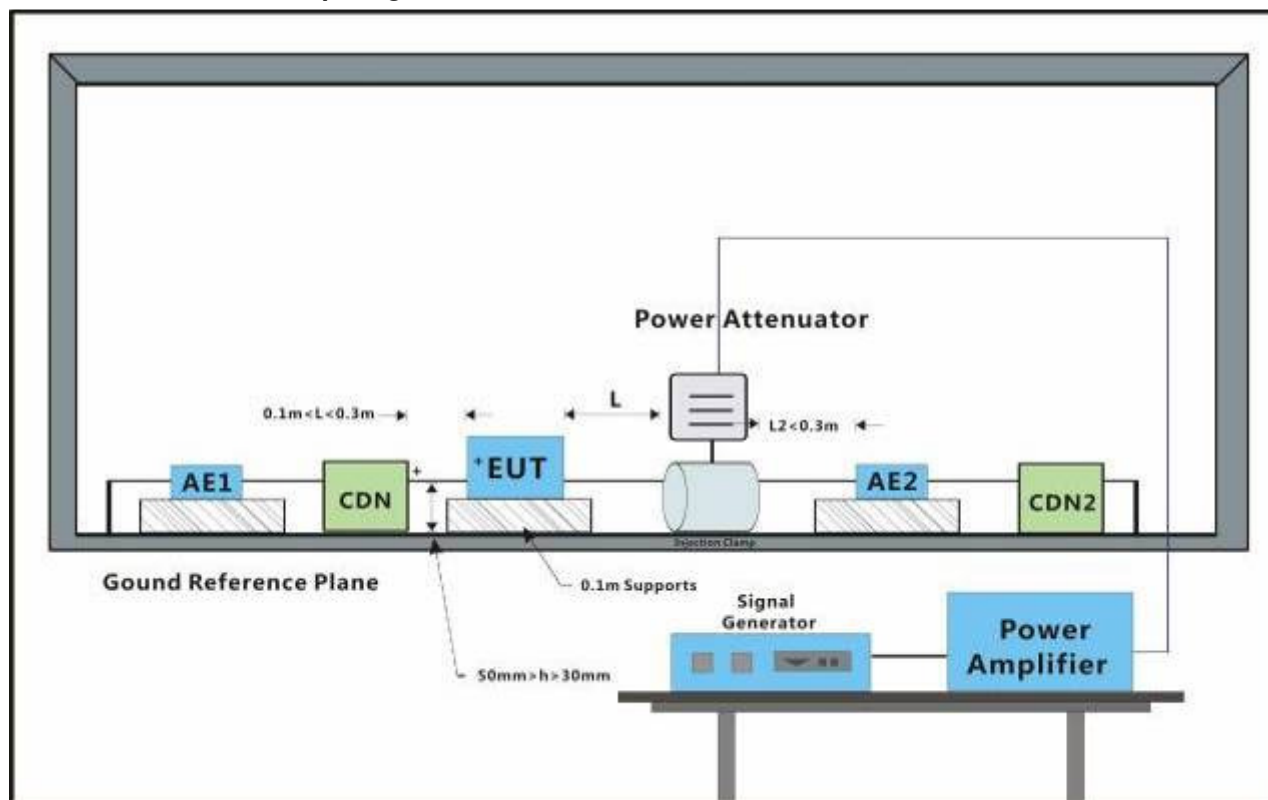

### 7.15.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	3	Coupling	2s	A

#### Results:

A: No degradation in the performance of the EUT was observed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 7.16 Voltage Dips and Interruptions

Test Requirement: EN 55024:2010 +A1:2015  
Test Method: EN 61000-4-11:2004  
Performance Criterion: 0% of UT (Supply Voltage) for 0.5 Periods:B; 0% of UT for 250 Periods:C; 70 % of UT for 25 Periods:C  
No. of Dips / Interruptions: 3 per Level  
Time between dropout 10s


### 7.16.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.16.2 Test Setup Diagram

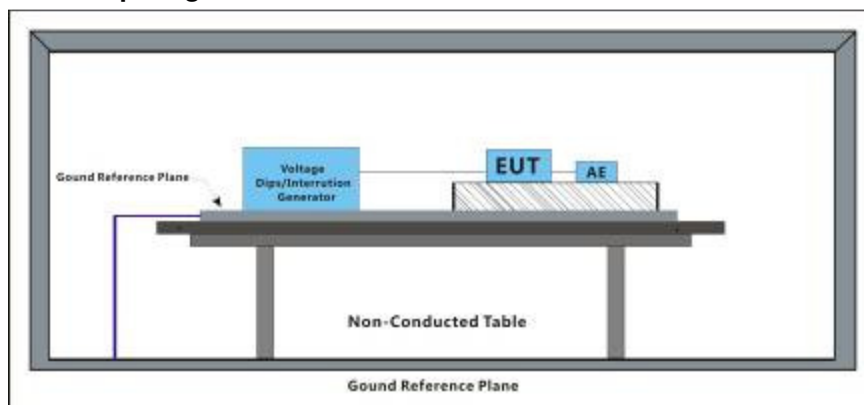

### 7.16.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycles	3	A
0	180°	0.5 Cycles	3	A
0	0°	250 Cycles	3	C
0	180°	250 Cycles	3	C
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A

#### Results:

A: No degradation in the performance of the EUT was observed.

C: During test, EUT stop work, After test ,EUT restart by operator



## 7.17 Voltage Dips and Interruptions

Test Requirement: EN 50130-4:2011 +A1:2014  
Test Method: EN 61000-4-11:2004  
Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods; 40% of UT for 10 Periods; 70% of UT for 25 Periods; 80% of UT for 250 Periods;  
No. of Dips / Interruptions: 3 per Level  
Time between dropout 10s

### 7.17.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.17.2 Test Setup Diagram

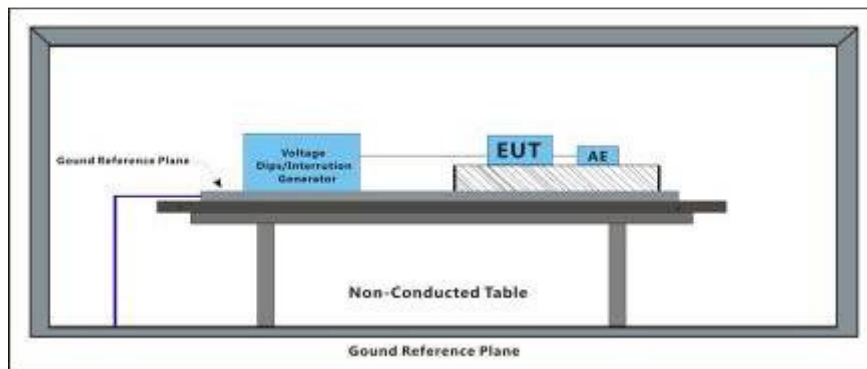

### 7.17.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
80	0°	250 Cycles	3	A
80	180°	250 Cycles	3	A
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A
40	0°	10 Cycles	3	A
40	180°	10 Cycles	3	A
0	0°	250 Cycles	3	C
0	180°	250 Cycles	3	C

#### Results:

A: No degradation in the performance of the EUT was observed.

C: During test, EUT stop work, After test ,EUT restart by operator

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 7.18 Mains Supply Voltage Variations-Conditioning


Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 50130-4:2011+A1:2014
Voltage max.:	AC 253V ( $U_{max}$ : $U_{nom} + 10\%$ )
Voltage min.:	AC 195.55V ( $U_{min}$ : $U_{nom} - 15\%$ )
Unom Voltage:	AC 230V
Criteria:	There shall be no damage, malfunction or change of status due to the different supply voltage conditions. The EUT shall meet the acceptance criteria for the functional test (see Clause 6 of EN 50130-4

### 7.18.1 E.U.T. Operation

Operating Environment:

Temperature:	22 °C	Humidity:	51 % RH	Atmospheric Pressure:	1002 mbar
Test mode:	a:DC12V monitoring : keep EUT monitoring continual under DC12V supply . b: PoE monitoring : keep EUT monitoring continual under PoE supply .				

### 7.18.2 Test Setup:

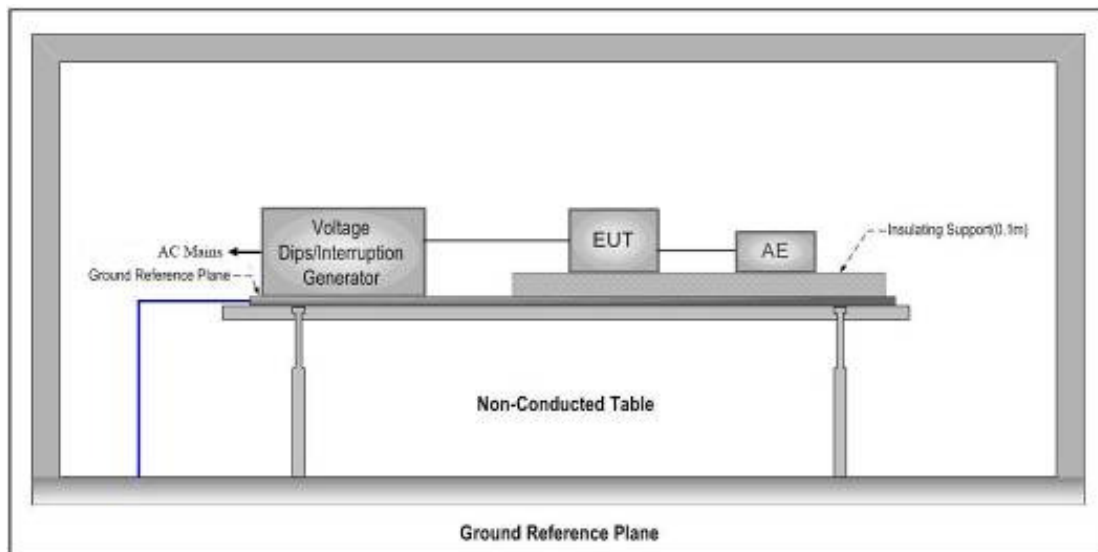

### 7.18.3 Test Results:

#### Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

## 7.19 Radiated Immunity(80MHz-2.7GHz)

Test Requirement: EN 50130-4:2011 +A1:2014  
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010  
 Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation  
 Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

### 7.19.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.19.2 Test Setup Diagram

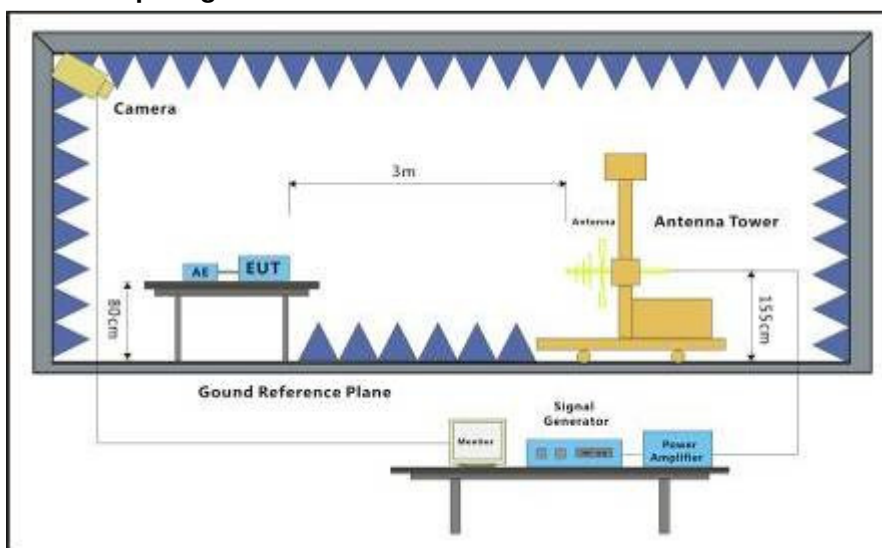

### 7.19.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	10	Front	3s	A
80MHz-2.7GHz	10	Back	3s	A
80MHz-2.7GHz	10	Left	3s	A
80MHz-2.7GHz	10	Right	3s	A
80MHz-2.7GHz	10	Top	3s	A
80MHz-2.7GHz	10	Underside	3s	A

### Results:

A: No degradation in the performance of the EUT was observed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




## 7.20 Conducted Immunity at Power Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014  
Test Method: EN 61000-4-6:2014  
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation  
Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

### 7.20.1 E.U.T. Operation

Operating Environment:  
Temperature: 21 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar  
Test mode:  
a: DC12V monitoring : keep EUT monitoring continual under DC12V supply .  
b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.20.2 Test Setup Diagram

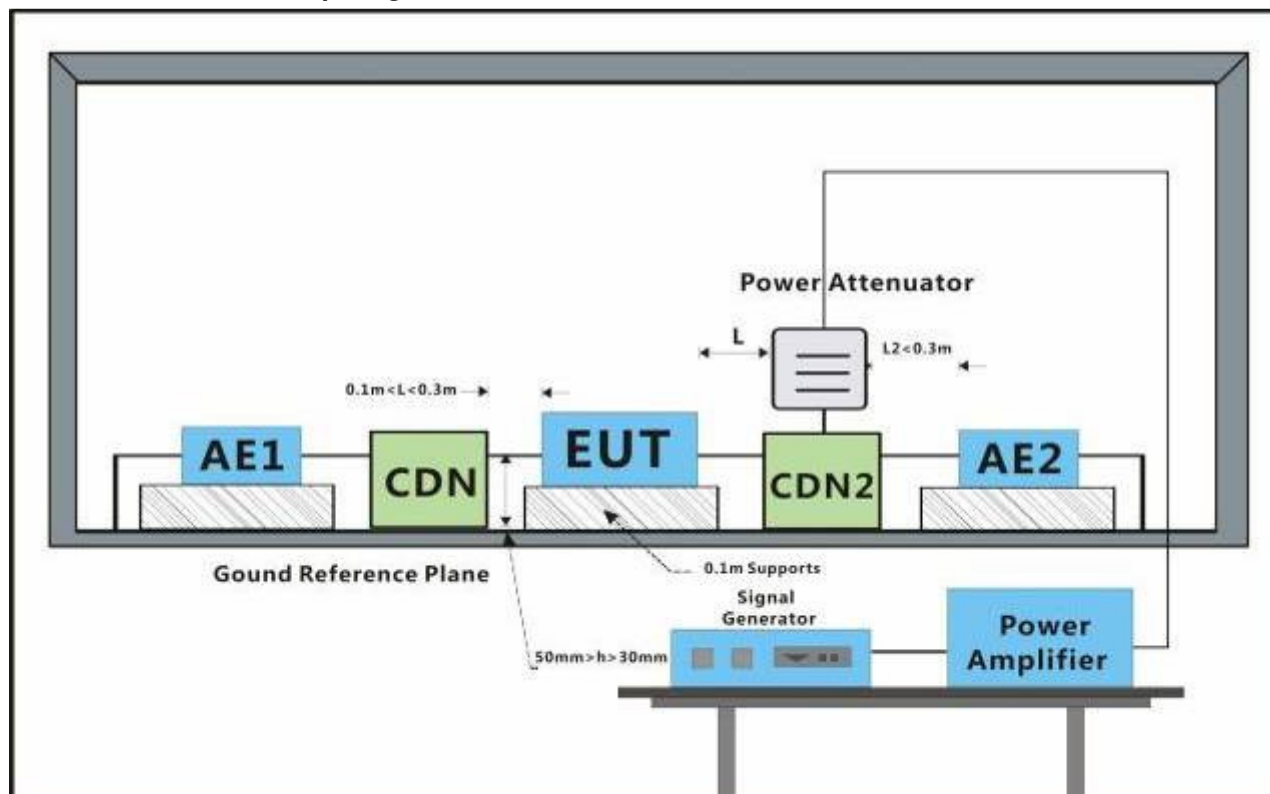

### 7.20.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	A

#### Results:

A: No degradation in the performance of the EUT was observed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 7.21 Conducted Immunity at Signal Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014  
Test Method: EN 61000-4-6:2014  
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation  
Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the

### 7.21.1 E.U.T. Operation


Operating Environment:

Temperature: 21 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:DC12V monitoring : keep EUT monitoring continual under DC12V supply .

b: PoE monitoring : keep EUT monitoring continual under PoE supply .

### 7.21.2 Test Setup Diagram

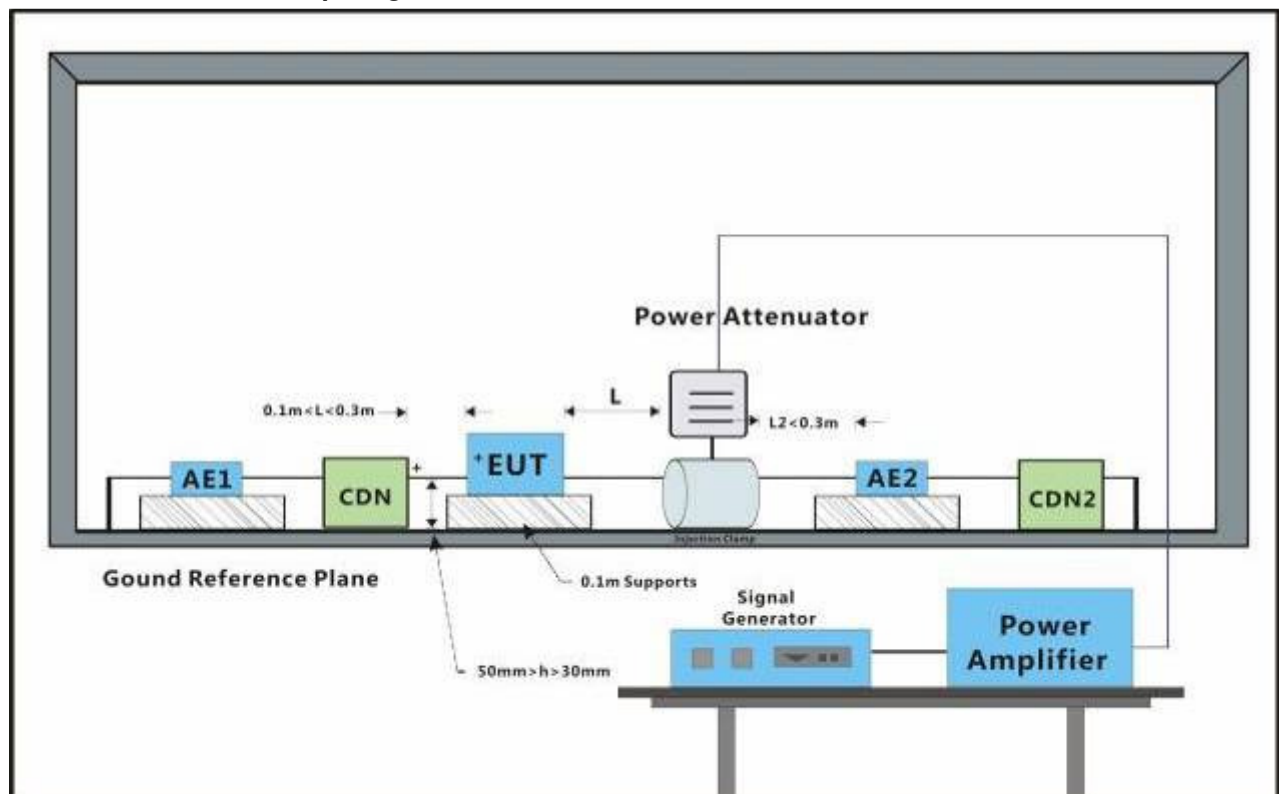

### 7.21.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	10	Clamp	3s	A

### Results:

A: No degradation in the performance of the EUT was observed.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 8 Photographs

### 8.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup



## 8.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz) Test Setup







### 8.3 Radiated Emissions (30MHz-1GHz) Test Setup





#### 8.4 Radiated Emissions (above 1GHz) Test Setup






## 8.5 Voltage Fluctuations and Flicker Test Setup






## 8.6 Electrostatic Discharge Test Setup



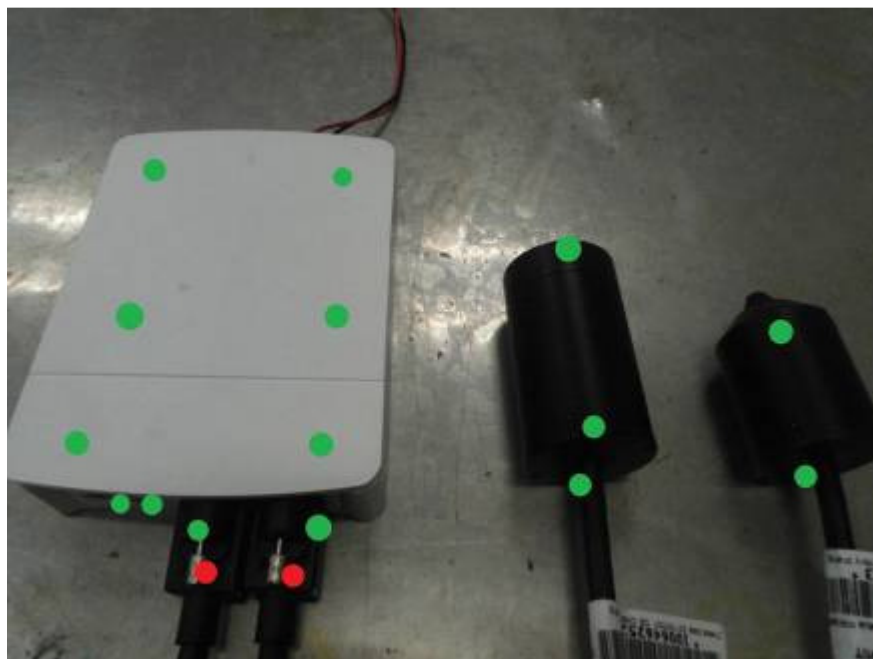



## 8.7 Radiated Immunity (80MHz-1GHz) Test Setup

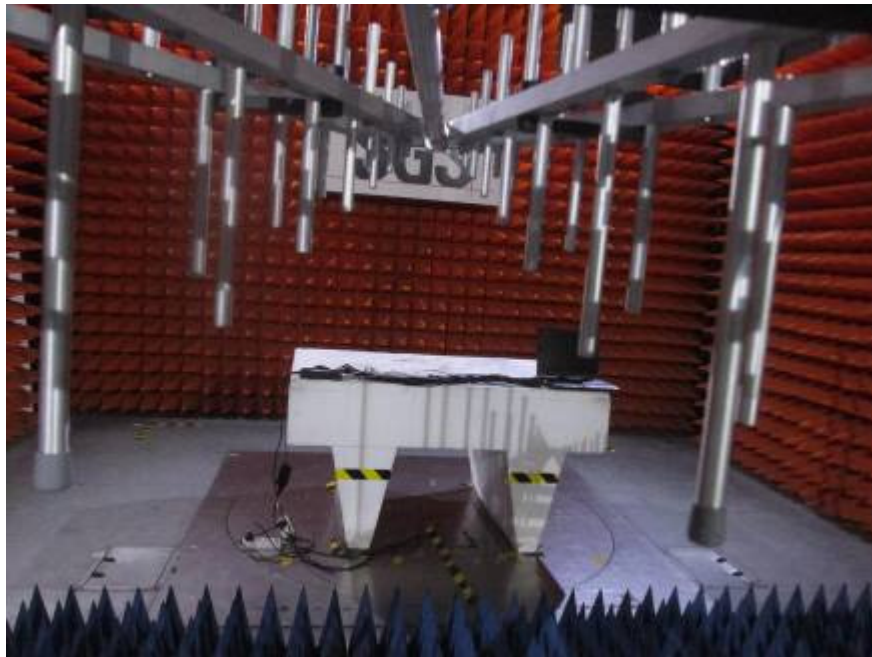





## 8.8 Electrical Fast Transients/Burst at Power Port Test Setup

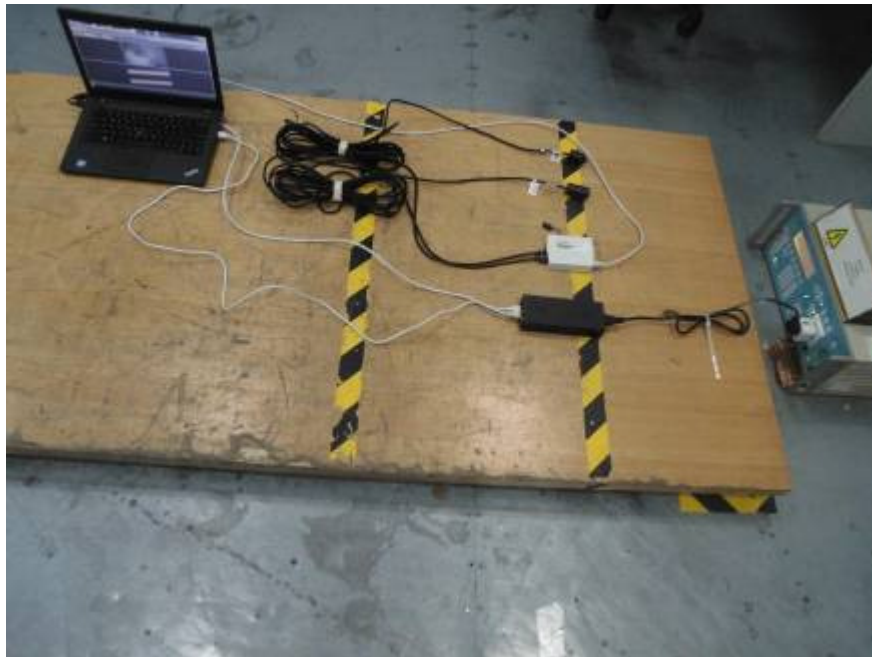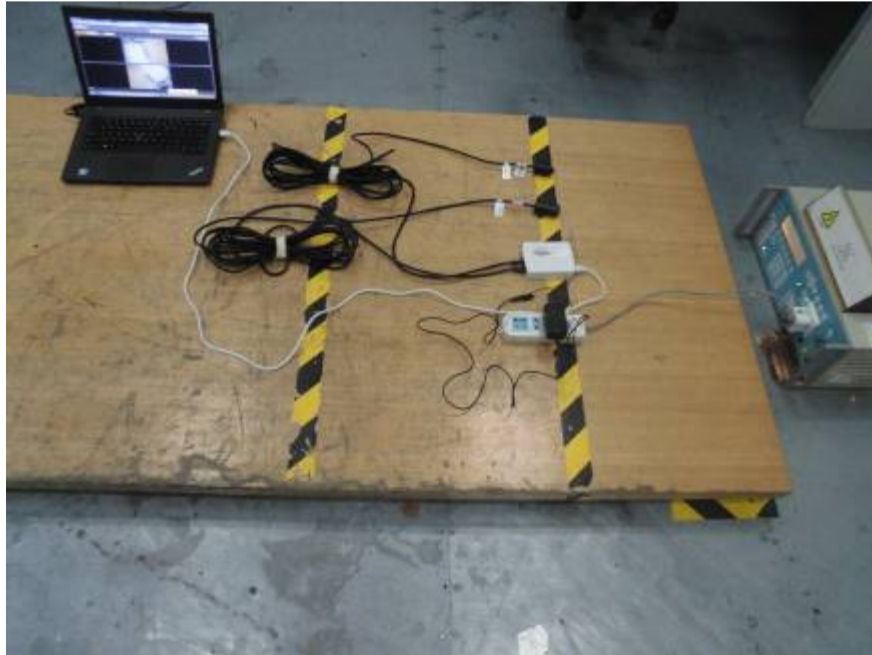


## 8.9 Electrical Fast Transients/Burst at Signal Port Test Setup






### 8.10 Surge at Power Port Test Setup

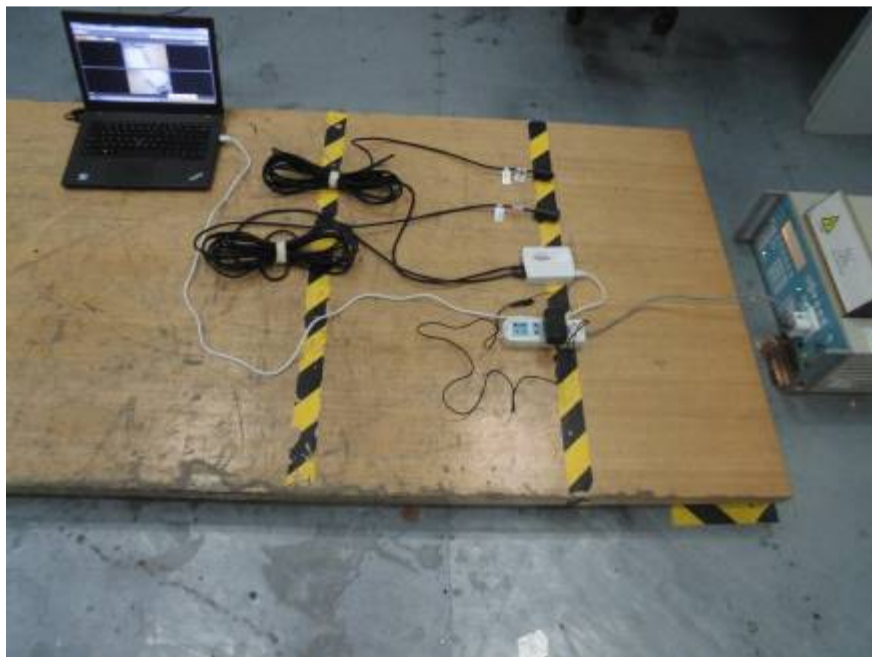





### 8.11 Surge at Signal Port Test Setup

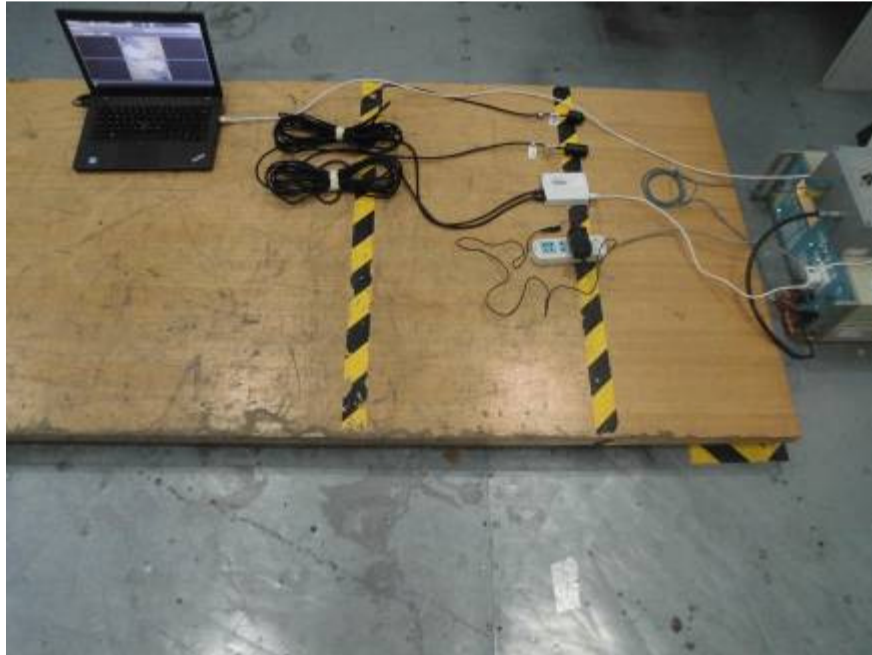


## 8.12 Conducted Immunity at Power Port (150kHz-80MHz) Test Setup









### 8.13 Conducted Immunity at Signal Port (150kHz-80MHz) Test Setup

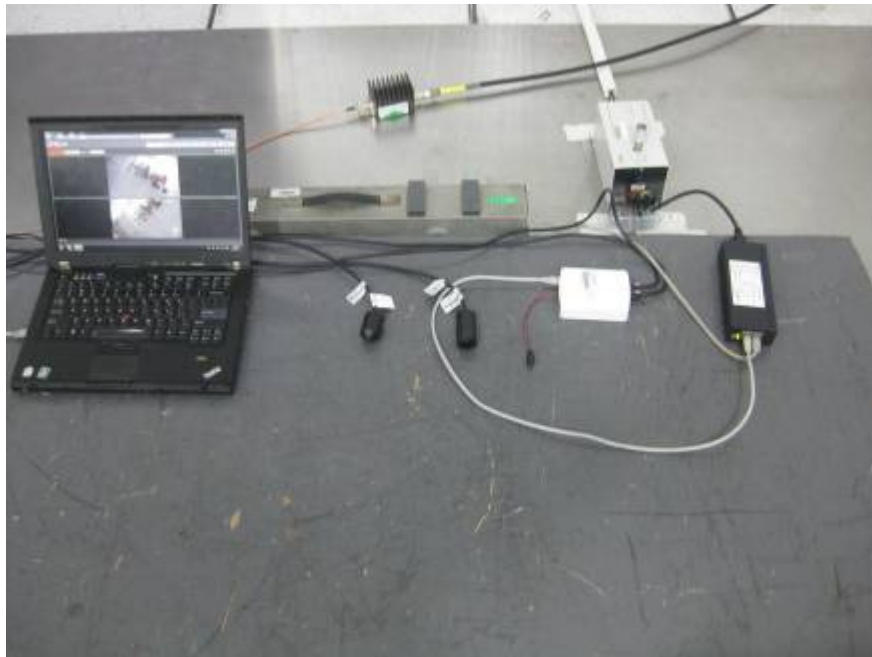




#### 8.14 Voltage Dips and Interruptions Test Setup

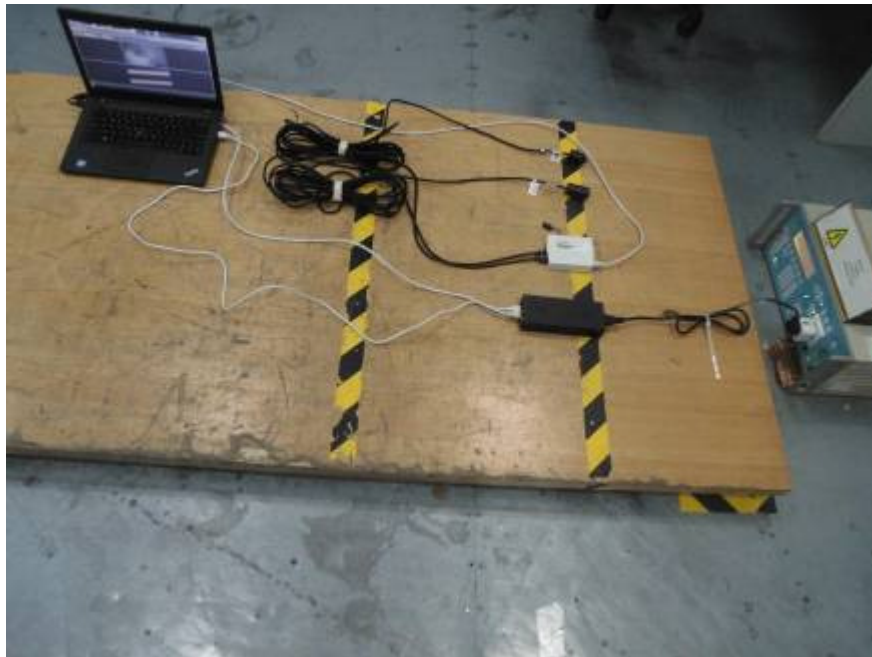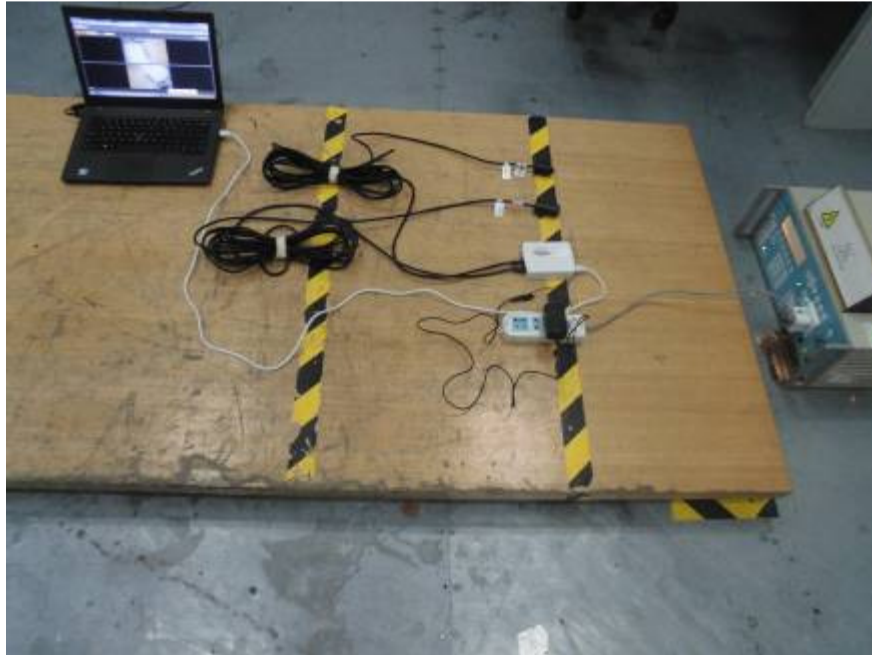


### 8.15 Mains Supply Voltage Variations-Conditioning Test Setup

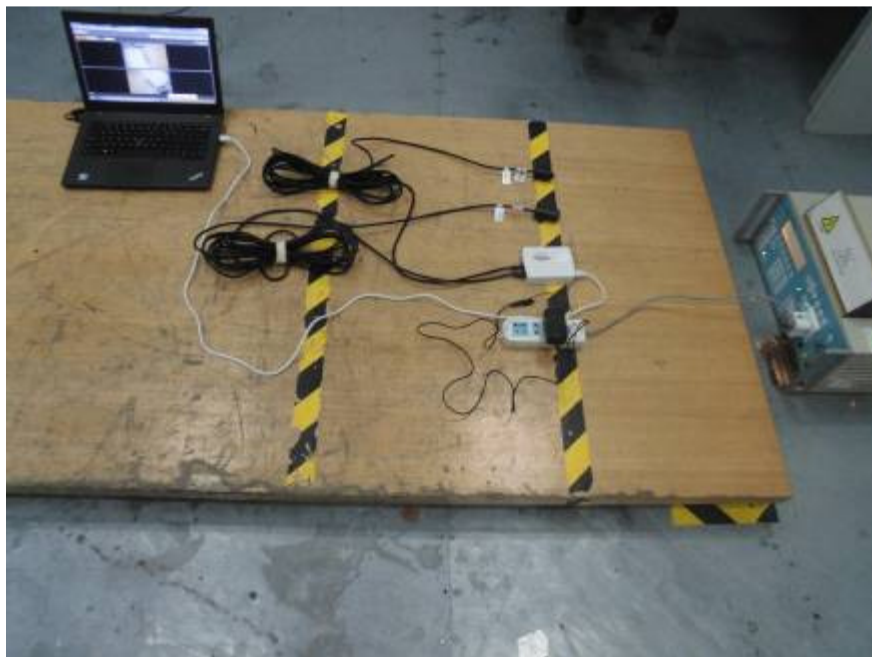





### 8.16 Radiated Immunity(80MHz-2.7GHz) Test Setup

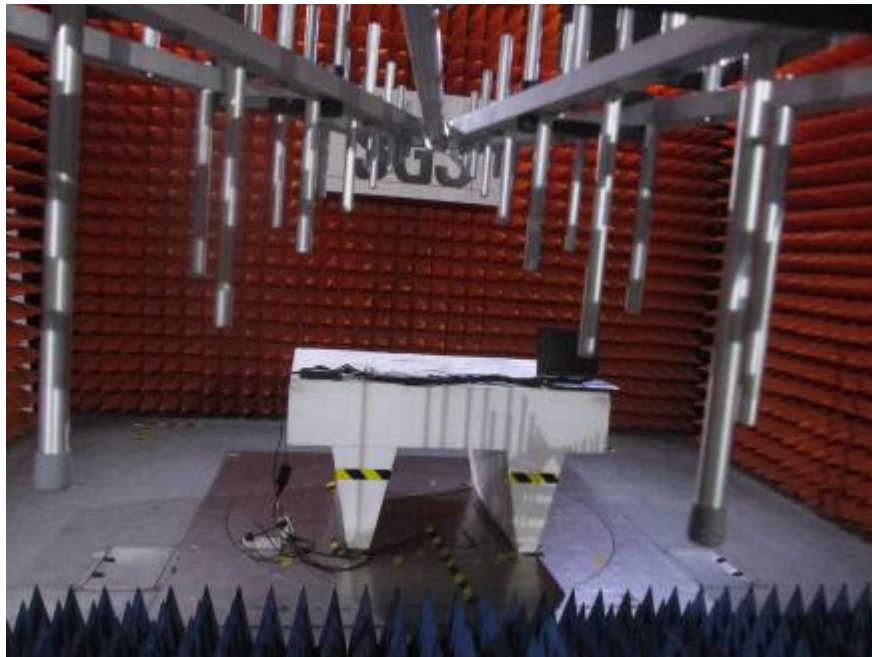



### 8.17 Conducted Immunity at Power Port (150kHz-100MHz) Test Setup



### 8.18 Conducted Immunity at Signal Port (150kHz-100MHz) Test Setup





### 8.19 EUT Constructional Details







# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM170700444101

Page: 84 of 86



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.







**--End of the Report--**